

SPECIFICATIONS





Current Rating: 3.0Amps
 Voltage Rating: 250V AC/DC
 Contact Resistance: 30m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 800V AC for 1 minute
 Temperature Range: -25°C to +85°C
 Insulator: NY66, UL94V-0, White

ORDER INFORMATION

H 2004 - 2 XX



No. of Contact per row	Dimensions	
	A	B
2	2.00	5.9
3	4.00	7.9
4	6.00	9.9
5	8.00	11.9
6	10.00	13.9
7	12.00	15.9
8	14.00	17.9
9	16.00	19.9
10	18.00	21.9
11	20.00	23.9
12	22.00	25.9
13	24.00	27.9
14	26.00	29.9
15	28.00	31.9
16	30.00	33.9
17	32.00	35.9
18	34.00	37.9
19	36.00	39.9
20	38.00	41.9

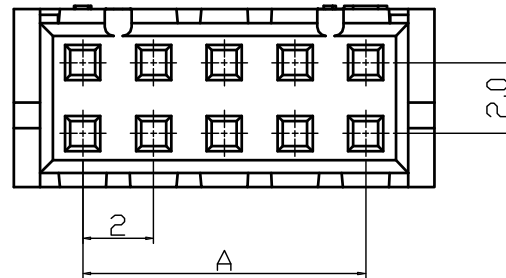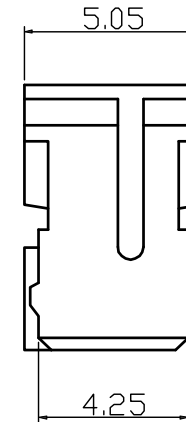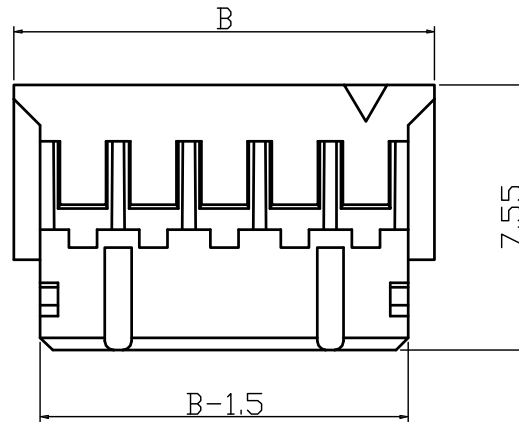

2P

		PART NO.	H2004-2XX		DRAWN	Andrew			
		DRAWING NO.	H2004-2XX		CHECKED	Claudia			
		DATE	2018/11/04		APPROVED	Brian			
TITLE:	Pitch 2.00mm Housing	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm