


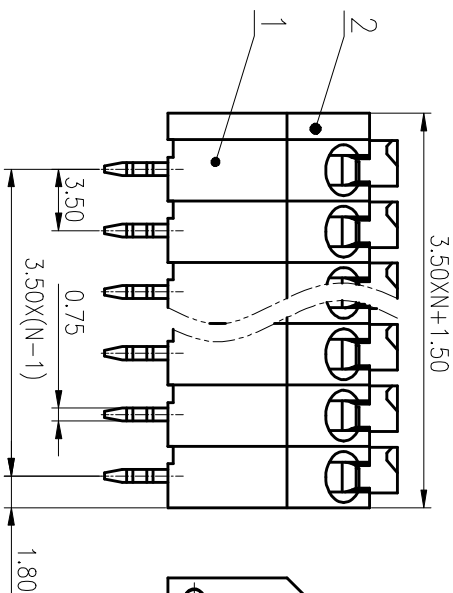
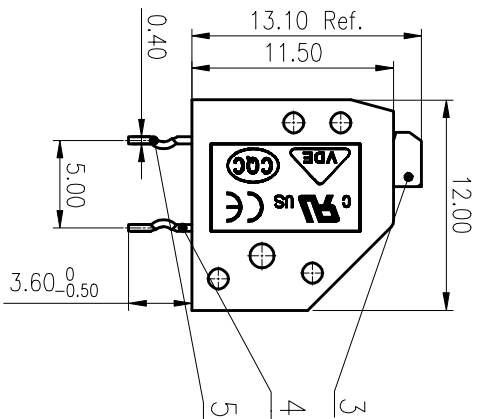


公差等级/General	tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2	±Z

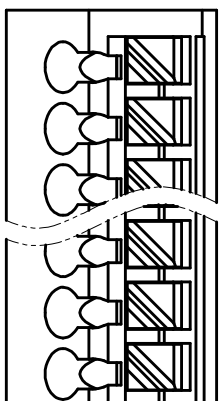

ITEM	NAME OF PART	MATERIAL	NOTES
5	Pin header 2	Copper alloy	Sn plated
4	Pin header 1	Copper alloy	Sn plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PCB LAYOUT  
3.5X(N-1)

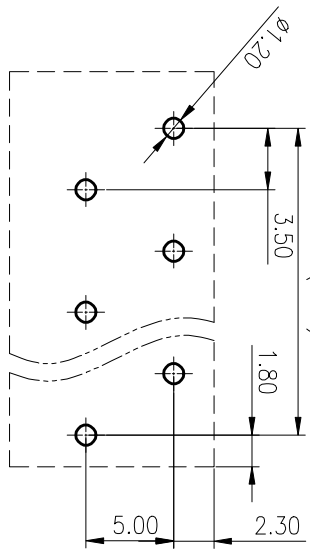

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	150/8	300/8
IEC 标准/IEC Standard:	III/3 III/2 II/2		
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3		
额定电压/电涌/Rated Voltage(V)/Current(A)	320/10	320/10	630/10
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	4	4	4
额定范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~1.5/22~16		
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~24P		
引线长度/Stripping length(mm)	8.5-9.5		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG250-3.5-XXP-1Y-00A(H). (自动化)

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				

DRAWING NO.: DG250-3.5-C134 TYPE: CUSTOMER DRAWING SCALE: 2.5:1 SHEET 1/1