


KSS

TERMINAL & TOOL




KAI SUH SUH ENTERPRISE CO., LTD.

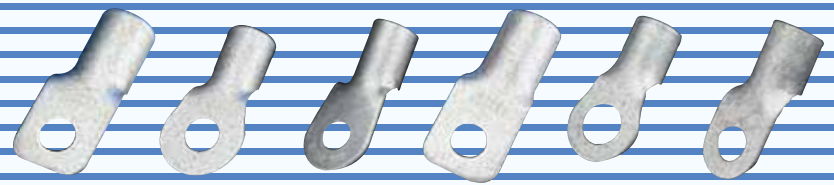



RING TERMINAL



Terminal material: Copper



SQ SERIES



ITEM NO.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm ²		
R1.25-3S	3.2	5.5	22-16	0.5-1.0		
R1.25-3	3.7	5.5				
R1.25-4	4.3	8.0				
R1.25-4M	4.3	6.6				
R1.25-5	5.3	8.0				
R1.25-6	6.4	11.7				
R1.25-8	8.4	11.7				
R1.25-10	10.5	13.7				
R2-3S	3.2	6.5			16-14	1.5-2.5
R2-3	3.7	6.5				
R2-4	4.3	8.5				
R2-4M	4.3	6.6				
R2-5	5.3	9.5				
R2-6	6.4	12.0				
R2-8	8.4	12.0				
R2-10	10.5	13.6				
R3.5-4	4.3	8.0	14-12	2.5-4		
R3.5-5	5.3	8.0				
R3.5-6	6.4	12.0				
R3.5-8	8.4	15.0				
R3.5-10	10.5	15.0				
R5.5-4	4.3	9.5	12-10	4-6		
R5.5-5	5.3	9.5				
R5.5-6S	6.4	12.0				
R5.5-6	6.4	12.0				
R5.5-8	8.4	15.0				
R5.5-10	10.5	15.0				
R5.5-12	13.0	19.3	8	10		
R8-4	4.3	12.0				
R8-5S	5.3	9.0				
R8-5	5.3	12.0				
R8-6	6.4	12.0				
R8-8	8.4	15.0				
R8-10	10.5	15.0				
R8-12	13.0	20.0			6	16
R14-5	5.3	9.5				
R14-6	6.4	12.0				
R14-8	8.4	16.0				
R14-10	10.5	16.0				
R14-12	13.0	22.0	4	25		
R22-6S	6.4	13.0				
R22-6	6.4	16.0				
R22-8S	8.4	13.0				
R22-8	8.4	16.5				
R22-10	10.5	16.5				
R22-12	13.0	22.0	2	35		
R30-8	8.4	16.5				
R30-10	10.5	16.5				
R38-6S	6.4	15.0				


ITEM NO.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm ²		
R38-6ST	6.4	15.3	2	35		
R38-6T	6.4	22.0				
R38-8S	8.4	15.0				
R38-8ST	8.4	15.3				
R38-8	8.4	18.5				
R38-8T	8.4	22.0				
R38-10S	10.5	15.0				
R38-10ST	10.5	15.3				
R38-10	10.5	18.5				
R38-10T	10.5	22.0				
R38-12	13.0	18.5	1/0	50		
R38-12T	13.0	22.0				
R50-8SQ	8.4	16.0			3/0	95
R50-10SQ	10.5	16.0				
R50-12	13.0	19.0				
R60-8	8.4	19.0				
R60-8SQ	8.4	17.3				
R60-10	10.5	19.0				
R60-10SQ	10.5	17.3				
R60-12	13.0	19.0				
R60-16L	17.0	32.0	4/0	120		
R60-20L	21.0	32.0				
R80-8	8.4	22.0				
R80-8SQ	8.4	18.9				
R80-10	10.5	22.0				
R80-10SQ	10.5	18.9				
R80-12	13.0	22.0				
R80-12SQ	13.0	18.9				
R80-16L	17.0	32.0	250/300 mcm	150		
R80-20L	21.0	32.0				
R80-22L	23.0	32.0				
R100-8	8.4	28.5				
R100-8SQ	8.4	23.0				
R100-10	10.5	28.5				
R100-10SQ	10.5	23.0				
R100-12	13.0	28.5				
R100-12SQ	13.0	23.0				
R100-16L	17.0	32.2				
R100-20L	21.0	32.2				
R100-22L	23.0	32.2				
R125-8SQ	8.4	23.0				
R125-10SQ	10.5	23.0				
R125-12SQ	13.0	23.0				
R150-10	10.5	36.5				
R150-10SQ	10.5	25.0				
R150-12	13.0	36.5				
R150-12SQ	13.0	25.0				
R150-16	17.0	36.5				
R150-16SQ	17.0	25.0				



RING TERMINAL



Terminal material: Copper




ITEM NO.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm ²		
R150-16L	17.0	36.5	250/300 mcm	150		
R150-20L	21.0	36.5				
R150-22L	23.0	36.5				
R150-24L	25.0	36.5				
R180-12SQ	13.0	28.0				
R180-16SQ	17.0	28.0				
R180-16L	17.0	39.0				
R180-20L	21.0	39.0				
R180-22L	23.0	39.0				
R180-24L	25.0	39.0				
R200-10	10.5	44.0			400 MCM	240
R200-10SQ	10.5	32.7				
R200-12	13.0	44.0				
R200-12SQ	13.0	32.7				
R200-16	17.0	44.0				
R200-16SQ	17.0	32.7				
R200-16L	17.0	44.0				
R200-20L	21.0	44.0				
R200-22L	23.0	44.0				
R200-24L	25.0	44.0				
R200-27L	28.0	44.0				
R250-10	10.5	44.0	400 MCM	240		
R250-10SQ	10.5	32.7				
R250-12	13.0	44.0				
R250-12SQ	13.0	32.7				
R250-16	17.0	44.0				
R250-16SQ	17.0	32.7				
R250-16L	17.0	44.0				
R250-20L	21.0	44.0				
R250-22L	23.0	44.0				
R250-24L	25.0	44.0				
R250-27L	28.0	44.0				
R325-10	10.5	51.0			500/600 MCM	300
R325-10SQ	10.5	38.4				
R325-12	13.0	51.0				
R325-12SQ	13.0	38.4				
R325-16	17.0	51.0				
R325-16SQ	17.0	38.4				
R325-16L	17.0	51.0				
R325-20L	21.0	51.0				
R325-22L	23.0	51.0				
R325-24L	25.0	51.0				
R325-27L	28.0	51.0				


Y TERMINAL




Terminal material: Copper



ITEM NO.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm ²		
Y1.25-3S	3.7	5.7	22-16	0.5-1.0		
Y1.25-3	3.7	6.2				
Y1.25-4	4.3	7.2				
Y1.25-4S	4.3	6.4				
Y1.25-5	5.3	8.0				
Y1.25-6	6.3	9.7				
Y2-3S	3.7	5.7	16-14	1.5-2.5		
Y2-3	3.7	6.2				
Y2-4S	4.2	6.5				
Y2-4	4.3	7.2				
Y2-5	5.3	8.0				
Y2-6	6.4	10.7				
Y3.5-3S	3.7	6.4	14-12	2.5-4		
Y3.5-3	3.7	7.4				
Y3.5-4	4.3	8.0				
Y3.5-5	5.3	8.0				
Y5.5-3S	3.7	7.2			12-10	4-6
Y5.5-3	3.7	8.2				
Y5.5-4S	4.3	7.2				
Y5.5-4	4.3	8.2				
Y5.5-5	5.3	9.0				
Y5.5-6	6.4	12.0				
Y8-4	4.3	8.2	8	10		
Y8-5	5.3	9.0				
Y8-6	6.4	12.0				
Y14-6	6.4	12.0	6	16		
Y22-8	8.4	13.0	4	25		




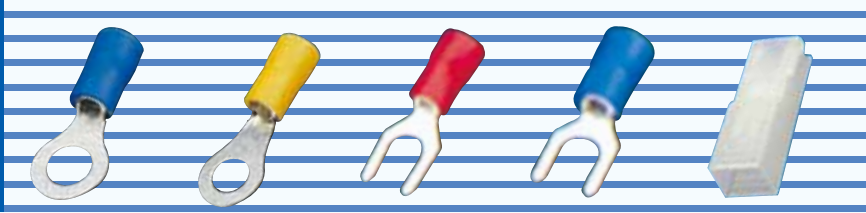

INSULATED RING TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
RF1.25-3S	3.2	5.5	22-16	0.5-1.0
RF1.25-3	3.7	5.5		
RF1.25-4	4.3	8.0		
RF1.25-4M	4.3	6.6		
RF1.25-5	5.3	8.0		
RF1.25-6	6.4	11.7		
RF1.25-8	8.4	11.7		
RF1.25-10	10.5	13.7		
RF2-3S	3.7	6.5	16-14	1.5-2.5
RF2-3	3.7	6.5		
RF2-4	4.3	8.5		
RF2-4M	4.3	6.6		
RF2-5	5.3	9.5		
RF2-6	6.4	12.0		
RF2-8	8.4	12.0		
RF2-10	10.5	13.7		
RF3.5-4	4.3	8.0	14-12	2.5-4
RF3.5-5	5.3	8.0		
RF3.5-6	6.4	12.0		
RF3.5-8	8.4	15.0		
RF3.5-10	10.5	15.0		
RF5.5-3	3.7	9.4	12-10	4-6
RF5.5-4	4.3	9.5		
RF5.5-5	5.3	9.5		
RF5.5-6	6.4	15.0		
RF5.5-6S	6.4	12.0		
RF5.5-8S	8.4	12.0		
RF5.5-8	8.4	15.0		
RF5.5-10	10.5	15.0		
RF5.5-12	13.0	19.25		
RF8-4	4.3	12.0	8	10
RF8-5S	5.3	9.0		
RF8-5	5.3	12.0		
RF8-6	6.4	12.0		
RF8-8	8.4	15.0		
RF8-10	10.5	15.0		

INSULATED Y TERMINAL




Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
YF1.25-3S	3.7	5.7	22-16	0.5-1.0
YF1.25-3	3.7	6.2		
YF1.25-4S	4.3	6.4		
YF1.25-4	4.3	7.2		
YF1.25-5	5.3	8.0		
YF1.25-6	6.3	9.7		
YF2-3S	3.7	5.7	16-14	1.5-2.5
YF2-3	3.7	6.2		
YF2-4S	4.3	6.5		
YF2-4	4.3	7.2		
YF2-5	5.3	8.0		
YF2-6	6.4	10.7		
YF3.5-3S	3.7	6.4	14-12	2.4-4
YF3.5-3	3.7	7.4		
YF3.5-4	4.3	8.0		
YF3.5-5	5.3	8.0		
YF5.5-3S	3.7	7.2	12-10	4-6
YF5.5-3	3.7	8.2		
YF5.5-4S	4.3	7.2		
YF5.5-4	4.3	8.2		
YF5.5-5	5.3	9.0		
YF5.5-6	6.4	12.0		
YF8-4	4.3	8.2	8	10
YF8-5	5.3	9.0		
YF8-6	6.4	12.0		

FEMALE LUG COVER





Insulation material: Nylon



ITEM NO.	W	H	L
CLV1-3A	5.2	5.0	20.2
CLV1-5A	7.3	6.1	21.5
CLV1-7A	9.6	6.3	25.2

INSULATED COLOR	
RED:	1.25 mm ² = AWG22-16
BLUE:	2.0 mm ² = AWG16-14
BLACK:	3.5 mm ² = AWG14-12
YELLOW:	5.5 mm ² = AWG12-10
WELCOME FOR SPECIAL COLOR REQUEST	

STUD SIZE	
mm - inch	mm - inch
3.2 - #4	6.4 - 1/4"
3.7 - #6	8.4 - 5/16"
4.3 - #8	10.5 - 3/8"
5.3 - #10	13.0 - 1/2"

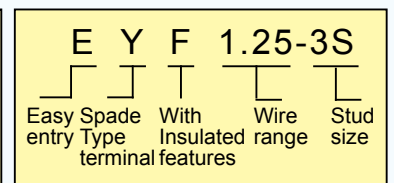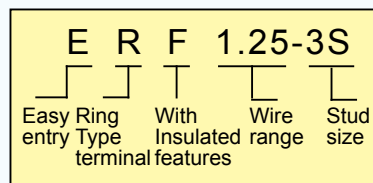




INSULATED RING TERMINAL EASY ENTRY



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
ERF1.25-3S	3.2	5.5	22-18	0.5-1.0
ERF1.25-3	3.7	5.5		
ERF1.25-4	4.3	8.0		
ERF1.25-4M	4.3	6.6		
ERF1.25-5	5.3	8.0		
ERF1.25-6	6.4	11.6		
ERF1.25-8	8.4	11.6		
ERF1.25-10	10.5	13.6		
ERF2-3S	3.2	5.5	16-14	1.5-2.5
ERF2-3	3.7	8.5		
ERF2-4	4.3	8.5		
ERF2-4M	4.3	6.6		
ERF2-5	5.3	9.5		
ERF2-6	6.4	11.6		
ERF2-8	8.4	11.6		
ERF2-10	10.5	13.6		
ERF5.5-4	4.3	9.5	12-10	4-6
ERF5.5-5	5.3	9.5		
ERF5.5-6S	6.4	12.0		
ERF5.5-8	8.4	15.0		
ERF5.5-10	10.5	15.0		

INSULATED Y TERMINAL EASY ENTRY



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
EYF1.25-3S	3.7	5.7	22-18	0.5-1.0
EYF1.25-3	3.7	6.2		
EYF1.25-4S	4.3	6.4		
EYF1.25-4	4.3	7.2		
EYF1.25-5	5.3	8.0		
EYF1.25-6	6.4	10.7		
EYF2-3S	3.7	5.7	16-14	1.5-2.5
EYF2-3	3.7	6.2		
EYF2-4S	4.3	6.4		
EYF2-4	4.3	7.2		
EYF2-5	5.3	8.0		
EYF2-6	6.4	10.7		
EYF5.5-3S	3.7	7.2	12-10	4-6
EYF5.5-3	3.7	8.2		
EYF5.5-4S	4.3	7.2		
EYF5.5-4	4.3	8.2		
EYF5.5-5	5.3	9.0		
EYF5.5-6	6.4	10.8		

HOOK TERMINAL



Terminal material: Copper




ITEM NO.	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
H1-4	4.3	8.0	22-16	0.5-1.0
H1-5	5.3	8.0		
H2-4	4.3	8.5	16-14	1.5-2.5
H2-5	5.3	9.5		
H5-4	4.3	9.5	12-10	4-6
H5-5	5.3	9.5		


INSULATED HOOK TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm ²
HF1-4	4.3	8.0	22-16	0.5-1.0
HF1-5	5.3	8.0		
HF2-4	4.3	8.5	16-14	1.5-2.5
HF2-5	5.3	9.5		
HF5-4	4.3	9.5	12-10	4-6
HF5-5	5.3	9.5		

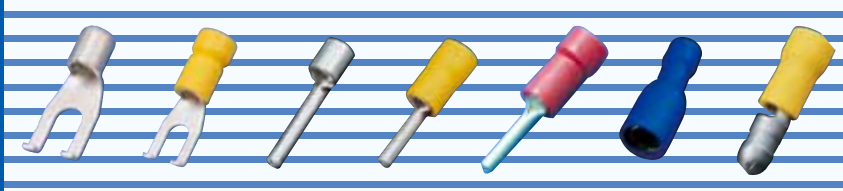

FLANGED SPADE TERMINAL



Terminal material: Copper




ITEM NO.	Stud Size	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	T(mm)	AWG	DIN mm ²
LY1-3	3.7	7.5	1.5	22-16	0.5-1.0
LY1-4	4.3	7.5	1.5		
LY1-5	5.3	7.5	1.5		
LY2-3	3.7	7.5	1.5	16-14	1.5-2.5
LY2-4	4.3	7.5	1.5		
LY2-5	5.3	7.5	1.5		
LY5-3	3.7	8.5	1.5	12-10	4-6
LY5-4	4.3	8.5	1.5		
LY5-5	5.3	8.5	1.5		

FLANGED SPADE INSULATED TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	Stud Size	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	T(mm)	AWG	DIN mm ²
LYF1-3	3.7	7.5	1.5	22-16	0.5-1.0
LYF1-4	4.3	7.5	1.5		
LYF1-5	5.3	7.5	1.5		
LYF2-3	3.7	7.5	1.5	16-14	1.5-2.5
LYF2-4	4.3	7.5	1.5		
LYF2-5	5.3	7.5	1.5		
LYF5-3	3.7	8.5	1.5	12-10	4-6
LYF5-4	4.3	8.5	1.5		
LYF5-5	5.3	8.5	1.5		

PIN TERMINAL



Terminal material: Copper




ITEM NO.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm ²
PIN-1.25	1.9	12	22-16	0.5-1.0
PIN-2	1.9	12	16-14	1.5-2.5
PIN-5.5	2.7	14	12-10	4-6

PIN INSULATED TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm ²
PIN-1.25-AF	1.9	12	22-16	0.5-1.0
PIN-2-AF	1.9	12	16-14	1.5-2.5
PIN-5.5-AF	2.7	14	12-10	4-6

PIN INSULATED TERMINAL EASY ENTRY



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm ²
EPIN-1.25-AF	1.9	12.2	22-16	0.5-1.0
EPIN-2-AF	1.9	12.2	16-14	1.5-2.5
EPIN-5.5-AF	2.7	13.5	12-10	4-6

FULLY RECEPTACLE



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	W(mm)	WIRE SIZE	
		AWG	DIN mm ²
F1.25-A	3.8	22-16	0.5-1.0
F2-A	3.8	16-14	1.5-2.5
F2-A5	4.9		
F5.5-A	4.9	12-10	4-6


INSULATED BULLET



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	W(mm)	WIRE SIZE	
		AWG	DIN mm ²
F1.25-B	4.0	22-16	0.5-1.0
F2-B	4.0	16-14	1.5-2.5
F2-B5	5.0		
F5.5-B	5.0	12-10	4-6

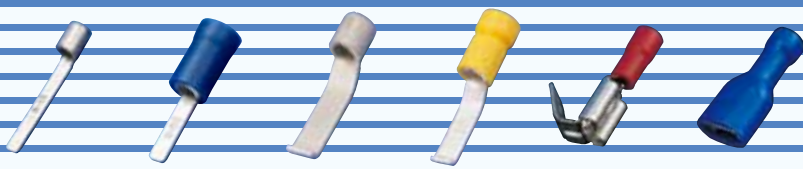

BLADE TERMINAL



Terminal material: Copper




ITEM NO.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm ²
BD1-10	2.3	10	22-16	0.5-1.0
BD1-18	2.2	18		
BD2-10	2.4	10	16-14	1.5-2.5
BD2-18	2.4	18		
BD5-10	2.8	10	12-10	4-6
BD5-18	2.8	18		

BLADE INSULATED TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm ²
BD1-10F	2.3	10	22-16	0.5-1.0
BD1-18F	2.2	18		
BD2-10F	2.4	10	16-14	1.5-2.5
BD2-18F	2.4	18		
BD5-10F	2.8	10	12-10	4-6
BD5-18F	2.8	18		

LIPPED BLADE TERMINAL



Terminal material: Copper



ITEM NO.	DIMENSION			WIRE SIZE	
	W(mm)	L(mm)	T(mm)	AWG	DIN mm ²
LB1-3	3.0	16.8	1.3	22-16	0.5-1.0
LB1-4	4.6	16.8	1.3		
LB2-3	3.0	16.8	1.3	16-14	1.5-2.5
LB2-4	4.6	16.8	1.3		
LB5-3	3.0	17.2	1.3	12-10	4-6
LB5-4	4.6	17.2	1.3		

LIPPED BLADE INSULATED TERMINAL



Terminal material: Copper
Insulation material: Vinyl




ITEM NO.	DIMENSION			WIRE SIZE	
	W(mm)	L(mm)	T(mm)	AWG	DIN mm ²
LB1-3F	3.0	16.8	1.3	22-16	0.5-1.0
LB1-4F	4.6	16.8	1.3		
LB2-3F	3.0	16.8	1.3	16-14	1.5-2.5
LB2-4F	4.6	16.8	1.3		
LB5-3F	3.0	17.2	1.3	12-10	4-6
LB5-4F	4.6	17.2	1.3		

PIGGY BACK DISCONNECTS



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
MF1-1.25-7A	6.35 X 0.8	22-16	0.5-1.0
MF2-7A	6.35 X 0.8	16-14	1.5-2.5
MF5.5-7A	6.35 X 0.8	12-10	4-6


INSULATED FEMALE LUG



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
PV1.25-3A	2.8 X 0.5	22-16	0.5-1.0
PV1.25-3A8	2.8 X 0.8		
PV1.25-5A	4.8 X 0.5		
PV1.25-5A8	4.8 X 0.8		
PV1.25-7A	6.35 X 0.8	16-14	1.5-2.5
PV2-3A	2.8 X 0.5		
PV2-3A8	2.8 X 0.8		
PV2-5A	4.8 X 0.5		
PV2-5A8	4.8 X 0.8		
PV2-7A	6.35 X 0.8	12-10	4-6
PV5.5-7	6.35 X 0.8		

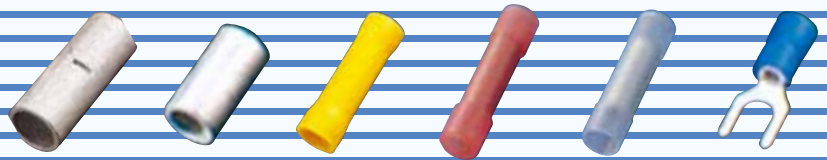

BUTT SPLICE



Terminal material: Copper




ITEM NO.	DIMENSION		WIRE SIZE	
	D(mm)	L(mm)	AWG	DIN mm ²
B-1.25	3.3	14.5	22-16	0.5-1.0
B-2	4.0	14.5	16-14	1.5-2.5
B-3.5	4.5	14.5	14-12	2.5-4
B-5.5	5.0	14.5	12-10	4-6
B-8	6.4	20.0	8	10
B-14	8.0	25.0	6	16
B-22	10.4	28.0	4	25
B-38	12.3	31.0	2	35
B-60	14.5	34.0	1/0	50
B-70	16.2	35.0	2/0	70
B-80	18.0	36.0	3/0	95
B-100	20.8	37.0	4/0	120
B-125	23.0	44.0	-	-
B-150	24.8	52.0	250-300MCM	150
B-180	26.6	55.0	300-350MCM	185
B-200	30.6	61.0	400MCM	240
B-250	30.6	61.0	400MCM	240
B-325	35.0	70.0	500-600MCM	300

PARALLEL SPLICE



Terminal material: Copper




ITEM NO.	DIMENSION		WIRE SIZE	
	D(mm)	L(mm)	AWG	DIN mm ²
P-1.25	3.3	8.0	22-16	0.5-1.0
P-2	4.0	8.0	16-14	1.5-2.5
P-3.5	4.5	8.5	14-12	2.5-4
P-5.5	5.0	8.5	12-10	4-6
P-8	6.4	9.5	8	10
P-14	8.0	11.0	6	16
P-22	10.4	13.5	4	25
P-38	12.3	16.5	2	35
P-60	14.5	19.0	1/0	50
P-70	16.2	19.0	2/0	70
P-80	18.0	19.5	3/0	95
P-100	20.8	20.0	4/0	120
P-125	23.0	24.0	-	-
P-150	24.8	27.0	250-300MCM	150
P-180	26.6	28.5	300-350MCM	185
P-200	30.6	32.0	400MCM	240
P-250	30.6	32.0	400MCM	240
P-325	35.0	37.0	500-600MCM	300

BUTT SPLICE INSULATED



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	WIRE SIZE	
	AWG	DIN mm ²
BF-1.25S	22-16	0.5-1.0
BF-2.0S	16-14	1.5-2.5
BF-5.5S	12-10	4-6

NYLON INSULATED BUTT SPLICE



Terminal material: Brass
Insulation material: Nylon




ITEM NO.	WIRE SIZE	
	AWG	DIN mm ²
BN-1.25S	22-16	0.5-1.0
BN-2.0S	16-14	1.5-2.5
BN-5.5S	12-10	4-6

BUTT SPLICE (WATER PROOF & HEAT SHRINKABLE)



Terminal material: Copper
Insulation material: Heat shrinkable tube




ITEM NO.	WIRE SIZE	
	AWG	DIN mm ²
BHS-1.25	22-16	0.5-1.0
BHS-2.0	16-14	1.5-2.5
BHS-5.5	12-10	4-6


NON INSULATED FEMALE LUG



Terminal material: Brass




ITEM NO.	WIRE SIZE	WIRE SIZE	
	NEMA SIZE	AWG	DIN mm ²
	W x T (mm)		
1.25-7A	7.0 X 0.8	22-16	0.5-1.0
2-7A	7.0 X 0.8	16-14	1.5-2.5
5.5-7A	7.0 X 0.8	12-10	4-6

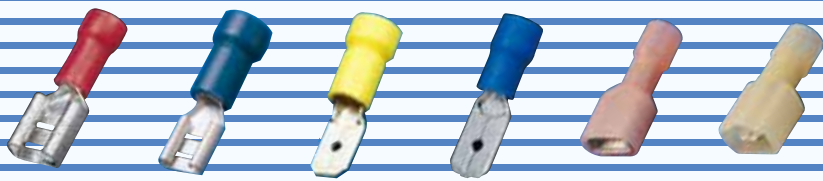

INSULATED FEMALE LUG



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
LV1.25-3A	2.8 X 0.5	22-16	0.5-1.0
LV1.25-3A8	2.8 X 0.8		
LV1.25-5A	4.8 X 0.5		
LV1.25-5A8	4.8 X 0.8		
LV1.25-7A	7.0 X 0.8		
LV1.25-8A	8.0 X 0.8		
LV2-3A	2.8 X 0.5	16-14	1.5-2.5
LV2-3A8	2.8 X 0.8		
LV2-5A	4.8 X 0.5		
LV2-5A8	4.8 X 0.8		
LV2-7A	7.0 X 0.8		
LV2-8A	8.0 X 0.8		
LV2-10A	9.5 X 0.8	12-10	4-6
LV5.5-7A	7.0 X 0.8		
LV5.5-10A	9.5 X 0.8		

MALE LUG



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
LV1.25-3B	2.8 X 0.5	22-16	0.5-1.0
LV1.25-3B8	2.8 X 0.8		
LV1.25-5B	4.8 X 0.5		
LV1.25-5B8	4.8 X 0.8		
LV1.25-7B	6.35 X 0.8		
LV2-3B	2.8 X 0.5		
LV2-3B8	2.8 X 0.8		
LV2-5B	4.8 X 0.5		
LV2-5B8	4.8 X 0.8		
LV2-7B	6.35 X 0.8		
LV2-7B	6.35 X 0.8		
LV5.5-7B	6.35 X 0.8	12-10	4-6

NYLON INSULATED FEMALE LUG



Terminal material: Brass
Insulation material: Nylon




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
PN1.25-7A	6.35 X 0.8	22-16	0.5-1.0
PN2-7A	6.35 X 0.8	16-14	1.5-2.5
PN5.5-7A	6.35 X 0.8	12-10	4-6

FEMALE LUG EASY ENTRY



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
ELV1.25-3A	2.8 X 0.5	22-16	0.5-1.0
ELV1.25-3A8	2.8 X 0.8		
ELV1.25-5A	4.8 X 0.5		
ELV1.25-5A8	4.8 X 0.8		
ELV1.25-7A	6.35 X 0.8		
ELV2-3A	2.8 X 0.5		
ELV2-3A8	2.8 X 0.8		
ELV2-5A	4.8 X 0.5		
ELV2-5A8	4.8 X 0.8		
ELV2-7A	6.35 X 0.8		
ELV2-8A	8.0 X 0.8		
ELV2-10A	9.5 X 0.8	12-10	4-6
ELV5.5-7A	6.35 X 0.8		
ELV5.5-10A	9.5 X 0.8		

MALE LUG EASY ENTRY



Terminal material: Brass
Insulation material: Vinyl




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
ELV1.25-3B	2.8 X 0.5	22-16	0.5-1.0
ELV1.25-3B8	2.8 X 0.8		
ELV1.25-5B	4.8 X 0.5		
ELV1.25-5B8	4.8 X 0.8		
ELV1.25-7B	6.35 X 0.8		
ELV2-3B	2.8 X 0.5		
ELV2-3B8	2.8 X 0.8		
ELV2-5B	4.8 X 0.5		
ELV2-5B8	4.8 X 0.8		
ELV2-7B	6.35 X 0.8		
ELV2-7B	6.35 X 0.8		
ELV5.5-7B	6.35 X 0.8	12-10	4-6


NYLON INSULATED MALE LUG



Terminal material: Brass
Insulation material: Nylon




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
PN1.25-7B	6.35 X 0.8	22-16	0.5-1.0
PN2-7B	6.35 X 0.8	16-14	1.5-2.5
PN5.5-7B	6.35 X 0.8	12-10	4-6

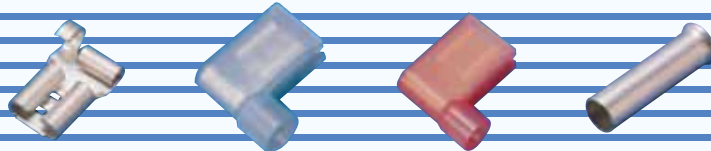

FLAG FEMALE DISCONNECTS



Terminal material: Brass




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
FL1.25-7A	6.35 X 0.8	22-16	0.5-1.0
FL2-7A	6.35 X 0.8	16-14	1.5-2.5

NYLON INSULATED FLAG FEMALE DISCONNECTS



Terminal material: Brass
Insulation material: Nylon




ITEM NO.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm ²
FLN1.25-7A	6.35 X 0.8	22-16	0.5-1.0
FLN2-7A	6.35 X 0.8	16-14	1.5-2.5

NON INSULATED CORD END TERMINAL




Terminal material: Copper



ITEM NO.	DIMENSION				WIRE SIZE	
	L	D	D1	D2	AWG	DIN mm ²
EN0.5-6	6					
EN0.5-8	8	1.0	1.3	2.1	#22	0.5
EN0.5-10	10					
EN0.75-6	6					
EN0.75-8	8	1.2	1.5	2.3	#20	0.75
EN0.75-10	10					
EN1.0-6	6					
EN1.0-8	8	1.4	1.7	2.5	#18	1.0
EN1.0-10	10					
EN1.0-12	12					
EN1.5-7	7					
EN1.5-8	8	1.7	2.0	2.8	#16	1.5
EN1.5-10	10					
EN1.5-12	12					
EN2.5-7	7					
EN2.5-8	8	2.2	2.5	3.4	#14	2.5
EN2.5-10	10					
EN2.5-12	12					
EN4-8	8					
EN4-9	9					
EN4-10	10	2.8	3.2	4.0	#12	4.0
EN4-12	12					
EN4-15	15					
EN4-18	18					
EN6-10	10	3.5	3.9	4.7	#10	6.0
EN6-12	12					
EN6-15	15					



ITEM NO.	DIMENSION				WIRE SIZE	
	L	D	D1	D2	AWG	DIN mm ²
EN6-18	18	3.5	3.9	4.7	#10	6
EN10-12	12					
EN10-15	15	4.5	4.9	5.8	#8	10
EN10-18	18					
EN16-12	12					
EN16-15	15	5.8	6.2	7.5	#6	16
EN16-18	18					
EN25-15	15					
EN25-16	16	7.3	7.7	9.5	#4	25
EN25-18	18					
EN25-22	22					
EN35-16	16					
EN35-18	18	8.3	8.7	11.0	#2	35
EN35-20	20					
EN35-25	25					
EN50-18	18					
EN50-20	20	10.3	10.9	13.0	1/0	50
EN50-25	25					
EN70-22	22	13.5	14.3	15.3	1/0	70
EN70-25	25					
EN95-25	25	14.7	15.5	16.6	4/0	95
EN95-32	32					
EN120-30	30					
EN120-32	32	16.7	17.6	18.6	-	120
EN120-34	34					
EN150-32	32	19.5	20.5	21.5	250 MCM	150
EN150-38	38					

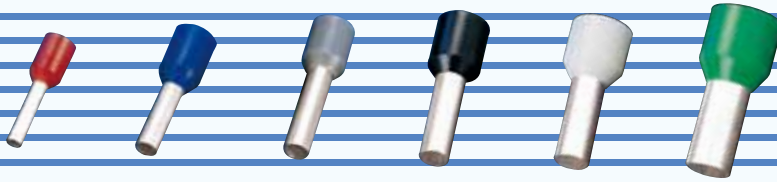

INSULATED CORD END TERMINAL



Terminal material: Copper
Insulation material: Nylon



DIN:DIN Color / W:German Color / T:French Color


ITEM NO.	DIMENSION			WIRE SIZE		INSULATED COLOR		
	L	L1	D	AWG	DIN mm ²	DIN	W	T
ET0.25-6	10	6.0	0.75	#26	0.25	-	Light Blue	Violet
ET0.25-8	12	8.0						
ET0.34-6	10	6.0	0.8	#24	0.34	-	Turkis	Pink
ET0.34-8	12	8.0						
ET0.5-6	12	6.0	1.0	#22	0.5	White	Orange	White
ET0.5-8	14	8.0						
ET0.5-10	16	10.0						
ET0.75-6	12	6.0	1.2	#20	0.75	Grey	White	Sky Blue
ET0.75-8	14	8.0						
ET0.75-10	16	10.0						
ET0.75-12	18	12.0						
ET1.0-6	12	6.0	1.4	#18	1.0	Red	Yellow	Red
ET1.0-8	14	8.0						
ET1.0-10	16	10.0						
ET1.0-12	18	12.0						
ET1.5-8	14	8.0	1.7	#16	1.5	Black	Red	Black
ET1.5-10	16	10.0						
ET1.5-12	18	12.0						
ET1.5-18	24	18.0						
ET2.5-8	14	8.0	2.2	#14	2.5	Blue	Blue	Grey
ET2.5-10	16	10.0						
ET2.5-12	18	12.0						
ET2.5-18	24	18.0						
ET4-10	17	10.0	2.8	#12	4	Grey	Grey	Orange
ET4-12	20	12.0						
ET4-18	26	18.0						
ET6-12	20	12.0	3.5	#10	6	Yellow	Black	Green
ET6-18	26	18.0						
ET10-12	22	12.0	4.5	#8	10	Red	Ivory	Brown
ET10-18	28	18.0						
ET16-12	24	12.0	5.8	#6	16	Blue	Green	Ivory
ET16-18	28	18.0						
ET25-16	30	16.0	7.3	#4	25	Yellow	Brown	Black
ET25-18	30	18.0						
ET25-22	35	22.0						
ET35-16	30	16.0	8.3	#2	35	Red	Beige	Red
ET35-18	32	18.0						
ET35-25	39	25.0						
ET50-20	36	20.0	10.3	1/0	50	Blue	Olive	Blue
ET50-25	40	25.0						
ET70-21	37	21.0	13.5	2/0	70	Yellow	-	-
ET95-25	44	25.0	14.7	4/0	95	Red	-	-
ET120-27	48	27.0	16.7	-	120	Blue	-	-
ET150-32	58	32.0	19.5	250MCM	150	Yellow	-	-



CABLE LUG



Terminal material: Copper




ITEM NO.	Stud Size	DIMENSION				WIRE SIZE	
		W	L	D	D1	AWG	DIN mm ²
C2.5-5	5.3	8.0	18.0	2.7	3.9	16-14	2.5
C4-5	5.3	10.0	20.0	3.0	4.5	12-10	4
C6-5	5.3	10.0	23.0	4.0	5.5	12-10	6
C10-6	6.4	10.0	25.0	4.5	6.2	#8	10
C10-8	8.4	12.6	25.0	4.5	6.2		
C16-6	6.4	10.0	30.0	5.4	7.1	#6	16
C16-8	8.4	12.6	30.0	5.4	7.1		
C25-6	6.4	12.6	35.0	6.8	8.8	#4	25
C25-8	8.4	12.6	35.0	6.8	8.8		
C25-10	10.5	15.0	35.0	6.8	8.8	#2	35
C35-6	6.4	15.0	38.0	8.4	10.6		
C35-8	8.4	15.0	38.0	8.4	10.6		
C35-10	10.5	15.0	38.0	8.4	10.6		
C50-8	8.4	18.0	43.0	9.7	12.4	1/0	50
C50-10	10.5	18.0	43.0	9.7	12.4		
C50-12	13.0	18.0	43.0	9.7	12.4	2/0	70
C70-8	8.4	21.0	50.0	11.8	14.7		
C70-10	10.5	21.0	50.0	11.8	14.7		
C70-12	13.0	21.0	50.0	11.8	14.7		
C95-10	10.5	25.5	58.0	14.2	17.4	3/0	95
C95-12	13.0	25.5	58.0	14.2	17.4		
C120-10	10.5	28.0	60.0	15.7	19.4	4/0	120
C120-12	13.0	28.0	60.0	15.7	19.4		
C120-14	15.0	28.0	60.0	15.7	19.4	300MCM	150
C120-16	17.0	28.0	60.0	15.7	19.4		
C150-12	13.0	30.5	69.0	17.2	21.2	350MCM	185
C150-14	15.0	30.5	69.0	17.2	21.2		
C150-16	17.0	30.5	69.0	17.2	21.2	500MCM	240
C185-12	13.0	34.0	78.0	19.2	23.5		
C185-14	15.0	34.0	78.0	19.2	23.5		
C185-16	17.0	34.0	78.0	19.2	23.5		
C240-10	10.5	38.5	92.0	21.7	26.5	600MCM	300
C240-12	13.0	38.5	92.0	21.7	26.5		
C240-14	15.0	38.5	92.0	21.7	26.5	800MCM	400
C240-16	17.0	38.5	92.0	21.7	26.5		
C240-18	19.0	38.5	92.0	21.7	26.5	1000MCM	500
C300-12	13.0	43.5	101.0	24.5	30.0		
C300-14	15.0	43.5	101.0	24.5	30.0		
C300-16	17.0	43.5	101.0	24.5	30.0	-	630
C400-14	15.0	53.0	114.0	29.5	36.5		
C400-16	17.0	53.0	114.0	29.5	36.5	-	800
C400-18	19.0	53.0	114.0	29.5	36.5		
C500-14	15.0	56.0	124.0	31.0	39.0	-	630
C500-16	17.0	56.0	124.0	31.0	39.0		
C500-18	19.0	56.0	124.0	31.0	39.0	-	800
C630-20	21.0	63.5	130.0	35.0	44.0		
C800-20	21.0	73.0	140.0	40.0	50.0		

CABLE LUG-HIGH VOLTAGE



Terminal material: Copper




Tolerance: ±2mm

ITEM NO.	DIMENSION			WIRE SIZE	
	L	D	D1	AWG	DIN mm ²
BL-8	52	4.0	6.2	#8	10
BL-14	50	6.0	8.8	#6	16
BL-22	55	7.7	10.5	#4	25
BL-38	64	9.8	12.4	#2	35
BL-60	71	11.0	14.0	1/0	50
BL-80	75	13.1	16.0	3/0	70
BL-100	75	14.0	18.0	4/0	95
BL-125	87	15.6	20.0	4/0	120
BL-150	95	17.0	22.0	300MCM	150
BL-180	98	18.2	23.0	350MCM	185
BL-200	105	20.0	25.8	400MCM	240
BL-250	115	22.0	28.2	500MCM	240
BL-325	120	24.2	32.0	600MCM	300
BL-400	130	29.3	36.3	800MCM	400
BL-500	150	31.0	40.0	1000MCM	500

CROSS-REFERNECE OF WIRE RANGE


Sq	AWG	Drahtgrobereich mm ²	DIN Querschnitt mm ²
(Taiwan/Japan)	(America)	(England)	(Germany)
0.5	26-2	0.1-0.4	0.14/0.20/ 0.25/0.36
1.25	22-16	0.4-1.0	0.5/0.75/1.0
2	16-14	1.1-2.6	1.5-2.5
2	16-14HD	1.1-2.6	1.5-2.5
5.5	12-10	2.7-6.6	4-6
8	8	6.7-10.5	10
14	6	10.6-16.7	16
22	4	16.8-26.6	25
38	2	26.7-42.4	35
60	1/0	42.5-60.5	50
70	2/0	60.6-76.2	70
80	3/0	76.3-97.0	95
100	4/0	98.0-120	120
150	250-300 MCM	121-151	150
180	300-350 MCM	152-192	185
200	400MCM	193-242	240
325	500-600 MCM	243-304	300

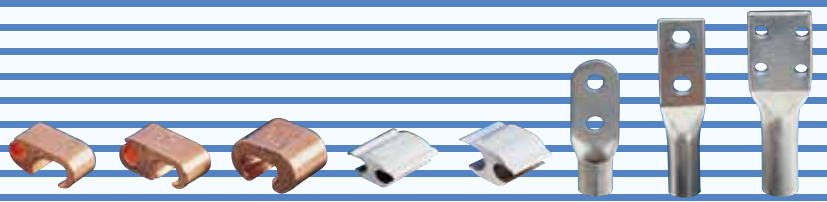


CABLE LUG & TWIN CABLE LUG



Terminal material: Copper

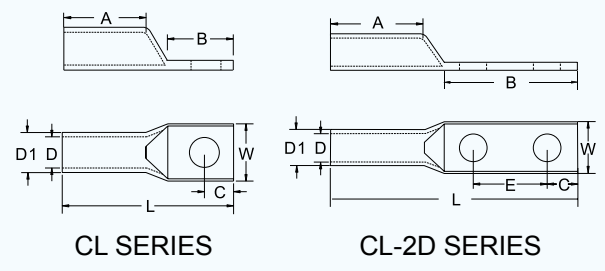

ITEM NO.	Stud Size	DIMENSION								WIRE SIZE	
		W	A	B	C	E	L	D	D1	AWG	DIN mm ²
CL14-8	8.4	12.0	28.5	16	8	-	50	5.8	8.8	#6	10.6-16.7
CL14-8-2D				80	12	45.0	120				
CL22-8	8.4	15.0	28.5	18	8.5	-	55	8.0	10.6	#4	16.8-26.6
CL22-8-2D				80	12	45.0	120				
CL22-10	10.5	15.0	28.5	18	8.5	-	55	8.0	10.6		
CL22-10-2D				80	12	45.0	120				
CL38-10	10.5	18.3	32.0	24	10	-	64	9.8	12.4	#2	26.7-42.4
CL38-10-2D			31.7	80	12	45.0	120				
CL38-12	13.0	18.3	32.0	24	10	-	64	9.8	12.4		
CL38-12-2D			31.7	80	12	45.0	120				
CL60-10	10.5	20.5	36.0	22	10	-	70	11.0	14.0	1/0	42.5-60.5
CL60-10-2D			40.0	75	12	45.0	130				
CL70-12	13.0	21.4	38.0	26	10	-	72	12.0	15.0		
CL70-12-2D			40.0	80	12	45.0	130				
CL80-12	13.0	23.2	38.0	26	13	-	75	13.0	16.0	3/0	76.3-97.0
CL80-12-2D			50.0	80	16	45.0	130				
CL100-12	13.0	26.0	40.0	26	13	-	75	14.0	18.0	4/0	96.3-117
CL100-12-2D			50.0	80	16	45.0	132				
CL125-12	13.0	28.0	40.0	32	13	-	85	16.0	20.0	250MCM	127
CL125-12-2D			50.0	80	16	45.0	135				
CL150-12	13.0	31.0	46.0	32	16	-	94	17.0	22.0	300MCM	152
CL150-12-2D			50.0	80	16	45.0	150				
CL180-12	13.0	33.0	46.0	32	16	-	98	18.2	23.0	350MCM	177
CL180-12-2D			50.0	80	16	45.0	150				
CL200-12	13.0	36.0	48.0	36	16	-	104	20.0	26.0	400MCM	203
CL200-12-2D			50.0	80	16	45.0	150				
CL250-12	13.0	40.0	48.0	40	18	-	114	22.0	28.0	500MCM	253
CL250-12-2D			50.0	80	16	45.0	150				
CL325-12	13.0	45.0	50.0	50	20	-	118	25.0	32.0	650MCM	325
CL325-12-2D			55.0	89	16	45.0	180				
CL400-12	13.0	48.0	60.0	54	22	-	130	30.0	37.0	800MCM	500
CL400-12-2D			90	18	45.0	180					
CL500-12	13.0	56.0	60.0	60	24	-	150	31.0	40.0	1000MCM	500
CL500-12-2D			93	21	45.0	180					

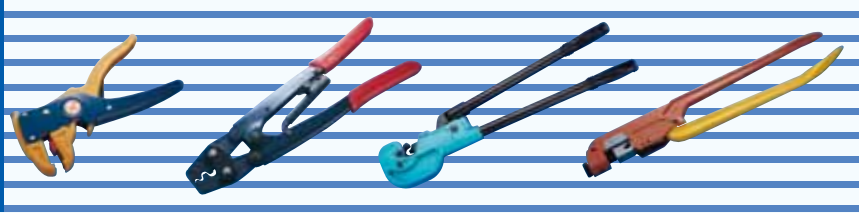

CRIMPERS
RYO-8
 FOR TERMINALS:
 1.25sq-8sq
 22AWG-8AWG
 0.5mm-10mm



CRIMPERS
RYO-80
 FOR TERMINALS :
 14sq-80sq
 6AWG-3/0
 10mm-95mm



CRIMPERS
RYO-38
 FOR TERMINALS :
 14sq-38sq
 6AWG-2AWG
 10mm-35mm

RYO-100
 FOR TERMINALS:
 22sq-100sq
 4AWG-4/0
 25 mm -120 mm

RYO-150
 FOR TERMINALS:
 8sq-150sq
 8AWG-250-300 MCM
 10 mm-150 mm



CABLE CUTTER
RYC-60
 FOR CABLE:
 MAX 60sq

RYC-250
 FOR CABLE:
 MAX 250sq

RYC-400
 FOR CABLE:
 MAX 400sq
 MAX.-600MCM
 MAX.-300 mm

RYC-100
 FOR CABLE:
 MAX 100sq



WIRE STRIPPER
WS 3000
 WS3000A - 0.5/1.2/1.6/2.0 mm
 (AWG 24/16/14/12)
 WS3000B - 1.0/1.6/2.0/2.6/3.2 mm
 (AWG 18/14/12/10/8)
 WS3000C - 0.9/1.25/2.0/3.5/5.5 mm
 (AWG 17/16/14/12/10)



HEAVY DUTY CRIMPING TOOL
YYT-1
 RED : 0.25-1.5 mm²
 BLUE : 1.5-2.5 mm²
 YELLOW : 4.0-6.0 mm²



HEAVY DUTY CRIMPING TOOL
YYT-7
 RED : 0.25-1.5 mm²
 BLUE : 1.5-2.5 mm²
 YELLOW : 4.0-6.0 mm²



FOR HEAVY DUTY CRIMPING TOOL FOR NON-INSULATED TERMINALS
YYT-8
 1.5 mm² 2.5-4 mm²
 6-8 mm² 10 mm²



FOR HEAVY DUTY CRIMPING TOOL FOR NON-INSULATED TERMINALS
YYT-9
 10 mm²
 16 mm²



HEAVY DUTY CRIMPING TOOL NON-INSULATED TERMINALS
YYT-11
 0.5-1.0 mm²
 1.1-2.5 mm²




HEAVY DUTY CRIMPING TOOL NON-INSULATED
YYT-12
 0.5-2.5 mm²
 1.1-2.5 mm²
 4-6 mm²



TAB CONNECTOR CRIMPING TOOL
YYT-12
 1.1-2.5 mm²
 4-6 mm²
 8-10 mm²



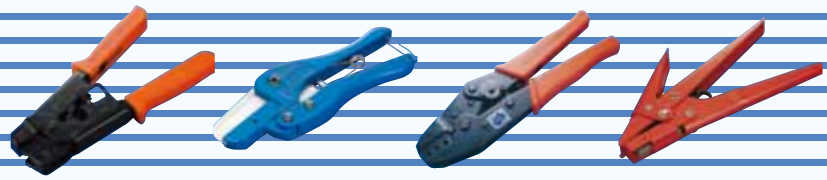

TERMINAL & TOOL KSS



COAX CRIMPING TOOL

YAC-3
 1.72 mm² 2.5 mm²
 5.4 mm² 6.48mm²
 8.2 mm²



D-SUB CONTACT CRIMPING TOOL

YAC-4
 AWG 18-30



CABLE FERRULES CRIMPING TOOL

YAC-5
 0.5-0.75 mm²
 1.0-1.5 mm² 2.5 mm²
 4 mm² 6 mm²




CABLE FERRULES CRIMPING TOOL

YAC-6
 6 mm²
 10 mm²
 16 mm²



CABLE FERRULES CRIMPING TOOL

YAC-8
 0.08 mm² ~ 6.0 mm²

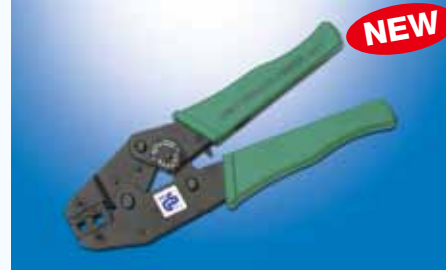

CABLE FERRULES CRIMPING TOOL

YAC-17
 25 mm²
 35 mm²



INSULATED FLAG FEMALE DISCONNECTS CRIMPING TOOL

LY03-FL
 0.5 mm - 2.5 mm



FLAG FEMALE DISCONNECTS CRIMPING TOOL

YS-03FC
 1.5 mm - 2.5 mm
 BLUE : 2 sq, 1.1-2.5 mm



YY-318

SELF-ADJUSTING CUTTER-STRIPPER

YY-318
 (0.5-8.0 mm²)
 MAX. stripping length: 25 mm



YTT-05

CABLE STRIPPER With a tripping capacity

YTT-05
 8P2C / 8P4C / 8P6C / 8P8C
 6P2C / 6P4C / 6P6C



WT-1

DUCT CUTTER

WT-1
 Suitable for PVC duct cutting



WT-2

WT-2
 ● Suitable for cutting PVC wiring duct flexible conduit and pipe
 ● Adjustable for cutting angle.



TIE GUN

TG-3
 Suitable for tie width : 2.5 ~ 5.0 mm



TIE GUN

TG-7
 Suitable for tie width : 2.5 ~ 5.0 mm



TIE GUN

TG-9
 Suitable for tie width : 2.5 ~ 10.0 mm



TIE GUN

TG-21
 Suitable for tie width : 4.6 ~ 7.9 mm





SINCE 1969

KAI SUH SUH ENTERPRISE CO., LTD.

HEAD OFFICE:

38, YEN PING N. RD., SEC.1 TAIPEI TAIWAN
TEL: 886-2-2555-1929 (9 LINES)
FAX: 886-2-2556-0052 (5 LINES)
<http://www.kss.com.tw>
E-mail:kss@mail.kss.com.tw

TAINAN FACTORY:

23, DU-CHIA, CHI-KU DIST, TAINAN TAIWAN
TEL: (06) 787-2239 (8 LINES) 787-4636 (3 LINES)
FAX: (06) 787-4388, 787-1399

TAICHUNG BRANCH OFFICES:

129, KUNG YIH RD., TAICHUNG TAIWAN
TEL: (04) 2301-1255 (8 LINES)
FAX: (04) 2302-1313

KAOHSIUNG BRANCH OFFICES:

116, BO AI 1 RD., KAOHSIUNG TAIWAN
TEL: (07) 323-1488 (10 LINES)
FAX: (07) 323-3849

