




■ 1530 省力型壓著鉗  
■ CRIMPING TOOL  
**DLT-3S**  
適用裸端子:sq 0.5, 1.25, 2, 3.5 / DIN 0.5, 1.25, 2, 3.5 mm<sup>2</sup>  
**DLT-6S**  
適用裸端子:sq 1.25, 2, 3.5, 5.5 / DIN 1.5, 2.5, 4, 6 mm<sup>2</sup>  
**DLT-8S**  
適用裸端子:sq 1.25, 2, 3.5, 5.5, 8 / DIN 1.5, 2.5, 4, 6, 10 mm<sup>2</sup>  
**DLT-14S**  
適用裸端子:sq 1.25, 2, 5.5, 8, 14 / DIN 1.5, 2.5, 6, 10, 16 mm<sup>2</sup>  
**DLT-25S**  
適用裸端子:sq 3.5, 5.5, 8, 14, 22 / DIN 4, 6, 10, 16, 25 mm<sup>2</sup>  
**DLT-38S**  
適用裸端子:sq 5.5, 8, 14, 22, 38 / DIN 6, 10, 16, 25, 50 mm<sup>2</sup>




■ 1530 壓著鉗  
■ CRIMPING TOOL  
**RYO-2**  
適用裸端子:1.25-2sq  
**RYO-8**  
適用裸端子:1.25-8sq/22-8 AWG/0.5-10 mm<sup>2</sup>  
**RYO-14**  
適用裸端子:1.25-14sq/22-6 AWG/0.5-16 mm<sup>2</sup>  
**RYO-25**  
適用裸端子:5.5-22sq



■ 1530 壓著鉗  
■ CRIMPING TOOL  
**RYO-38**  
適用裸端子:14-38sq/6-2 AWG/16-35 mm<sup>2</sup>  
**RYO-100**  
適用裸端子:22-100sq/4 AWG-4/0/25-120 mm<sup>2</sup>  
**RYO-150**  
適用裸端子:8-150sq/8 AWG-250~300 MCM/10-150mm<sup>2</sup>

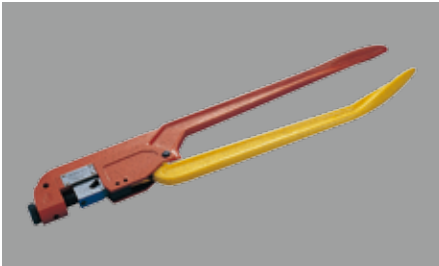

■ 1530 壓著鉗  
■ CRIMPING TOOL  
**RYO-80**  
適用裸端子:14-80sq/6 AWG-3/0/16-95 mm<sup>2</sup>

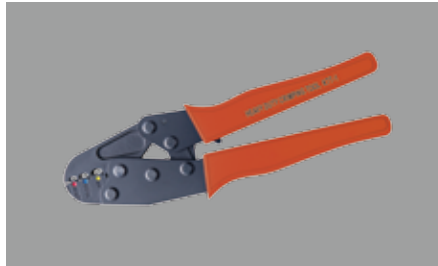


■ 1530 強力壓著絕緣端子鉗  
■ HEAVY DUTY CRIMPING TOOL  
**KTT-1**  
適用絕緣端子:  
紅:1.25sq, 0.5~1.0 mm<sup>2</sup>  
藍:2sq, 1.1~2.5 mm<sup>2</sup>  
黃:5.5sq, 4~6 mm<sup>2</sup>



■ 1530 強力壓著絕緣端子鉗  
■ HEAVY DUTY CRIMPING TOOL  
**KTT-7**  
適用絕緣端子:  
紅:1.25sq, 0.5~1.0 mm<sup>2</sup>  
藍:2sq, 1.1~2.5 mm<sup>2</sup>  
黃:5.5sq, 4~6 mm<sup>2</sup>  
適用閉端端子:CE-1, CE-2, CE-5



■ 1530 強力壓著不絕緣端子鉗  
■ HEAVY DUTY CRIMPING TOOL FOR NON-INSULATED TERMINALS  
**KTT-8**  
適用裸端子:  
2sq, 1.5 mm<sup>2</sup>/3.5sq, 2.5-4 mm<sup>2</sup>/5.5sq, 6-8 mm<sup>2</sup>/8sq, 10.0 mm<sup>2</sup>

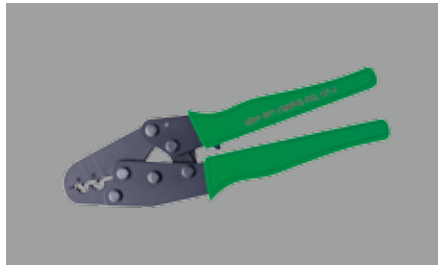

■ 1530 強力壓著不絕緣端子鉗  
■ HEAVY DUTY CRIMPING TOOL FOR NON-INSULATED TERMINALS  
**KTT-9**  
適用裸端子:  
8sq, 10 mm<sup>2</sup>/14sq, 16 mm<sup>2</sup>



■ 1530 強力壓著不絕緣端子鉗  
■ TAB CONNECTOR CRIMPING TOOL  
**KTT-10**  
適用裸端子:  
0.5-10 mm<sup>2</sup>/1.1-2.5 mm<sup>2</sup>

