


1109 KSS PCB SUPPORT


- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural, available in other colors.

UNIT : mm

| Item No. | O.D. | H1 | H2 | PCB | | Packing |
|----------|------|------|-----|---------|--------------|---------|
| | | | | hole M1 | thickness T1 | |
| BMS-5 | 11.8 | 5.6 | 9.5 | 4.0 | 2.0 | 100pcs |
| BMS-5B | 9.7 | 5.6 | 9.5 | 4.0 | | |
| BMS-5L7 | 7.1 | 5.6 | 9.5 | 4.8 | | |
| BMS-5L | 11.8 | 5.6 | 9.5 | 4.8 | | |
| BMS-7 | 11.8 | 6.5 | 9.5 | 4.0 | | |
| BMS-8 | 11.8 | 8.0 | 9.5 | 4.0 | | |
| BMS-11 | 12.0 | 11.0 | 9.0 | 4.0 | | |
| HMS-6 | 7.0 | 6.0 | 5.0 | 4.8 | | |



BMS




HMS-6

1109 KSS PCB SUPPORT

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural, available in other colors.

UNIT : mm

| Item No. | H1 | PCB | | Packing |
|----------|------|---------|--------------|---------|
| | | hole M1 | thickness T1 | |
| TMS-17 | 17.2 | 4.0 | 1.4 | 100pcs |




TMS-17

1109 KSS SELF-ADHESIVE PCB SUPPORT

- Material: UL94V-2 flame rated, UL approved Nylon 66 with adhesive tape.
- Color: Natural

UNIT : mm

| Item No. | W | H1 | PCB | | Packing |
|----------|------|------|---------|--------------|---------|
| | | | hole M1 | thickness T1 | |
| MMS-2 | 14.9 | 2.2 | 3.2 | 1.8 | 100pcs |
| MMS-21 | 17.9 | 21.3 | 4.0 | 1.8 | |

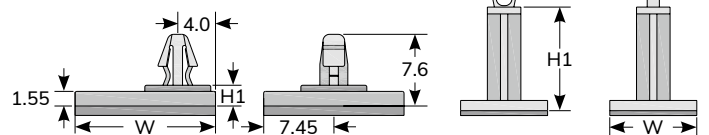

MMS-2

MMS-21