
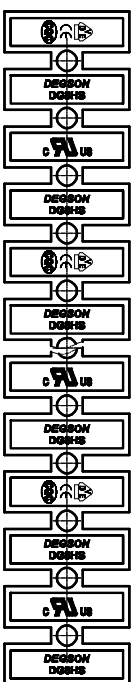

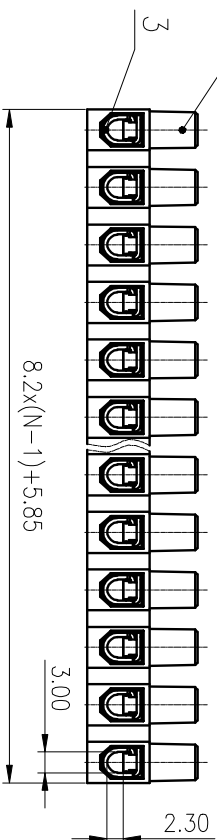


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

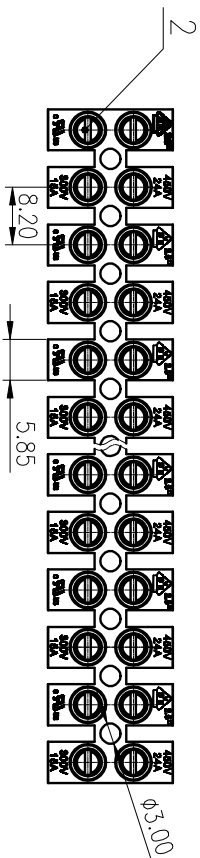

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/7.0
IEC 标准/IEC Standard:	300/7.0		
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
污染度/Pollution Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	450/24	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	2.5	/
额定扭矩/螺栓和螺线/Torque Tightening(N·m/Lb·in)	/	M2.5: 0.4/3.54	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	/	0.5~2.5/20~14	/
间距/Pitch(mm)/线数范围/Poles	/	8.2	/
剥线长度/Stripping length(mm)	/	9	/
使用温度范围/Operating temperature(°C)	/	-40~+105	/
符合RoHS要求/Conform to RoHS	/	Yes	/

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司

DRAWING NO.: DG8HSWP-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5