

Click to
ORDER
samples

AM10CW-LPZ



1" x 1"

The AM10CW-LPZ is a 10W DC/DC converter that offers a regulated output which contributes to a more stable and reliable output performance. It features a wide 4:1 input voltage range of 9-75VDC, which will benefit your new system design.


This series offers great operating temperatures, from -40°C to 85°C. Furthermore, an isolation of 1500VDC, a high MTBF of 1,000,000h, continuous output short circuit protection (OSCP), over-current protection (OCP), over-voltage protection (OVP), and under voltage lock-out (UVLO) come standard with the series.

The AM10CW-LPZ is suitable for distributed power supply systems, industrial controls, power grid, instruments and communications applications.

Features

- Operating Temp: -40 °C to +85 °C
- High isolation voltage: 1500VDC
- Low ripple & noise, 50mV (p-p), typ.
- Regulated Output
- 1" x 1" package
- Output short circuit, over-current, over-voltage, input under voltage protection

Summary

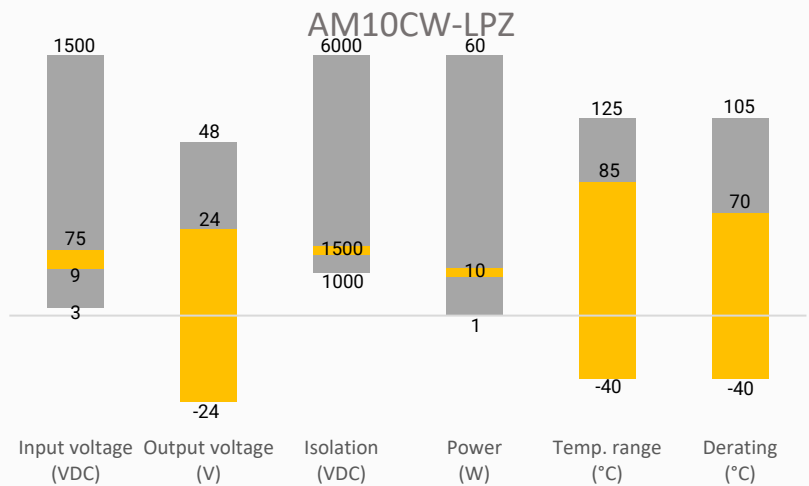

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications



Single Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current (mA TYP.)		Output Current Max (mA)	Maximum Capacitive Load (μF)	Efficiency Full Load Typ. (%)
			No Load	Full Load			
AM10CW-2403SLPZ	24 (9-36)	3.3	5	423	2400	2200	77
AM10CW-2405SLPZ	24 (9-36)	5	5	500	2000	2200	82
AM10CW-2409SLPZ	24 (9-36)	9	5	500	1111	680	85
AM10CW-2412SLPZ	24 (9-36)	12	5	500	833	470	86
AM10CW-2415SLPZ	24 (9-36)	15	5	500	667	330	86
AM10CW-2424SLPZ	24 (9-36)	24	5	500	416	100	88
AM10CW-4803SLPZ	48 (18-75)	3.3	5	190	2400	2200	79
AM10CW-4805SLPZ	48 (18-75)	5	5	250	2000	2200	83
AM10CW-4812SLPZ	48 (18-75)	12	5	250	833	470	87
AM10CW-4815SLPZ	48 (18-75)	15	5	250	667	330	87
AM10CW-4824SLPZ	48 (18-75)	24	5	250	416	100	88

Dual Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Max (mA TYP.)		Output Current Max (mA)	Maximum Capacitive Load (μF)	Efficiency (%) Full Load Typ.
			No Load	Full Load			
AM10CW-2405DLPZ	24 (9-36)	±5	5	500	±1000	1000	83
AM10CW-2409DLPZ	24 (9-36)	±9	5	500	±555	680	86
AM10CW-2412DLPZ	24 (9-36)	±12	5	500	±416	470	87
AM10CW-2415DLPZ	24 (9-36)	±15	5	500	±333	330	87
AM10CW-2424DLPZ	24 (9-36)	±24	5	500	±208	100	87
AM10CW-4805DLPZ	48 (18-75)	±5	5	250	±1000	1000	83
AM10CW-4812DLPZ	48 (18-75)	±12	5	250	±416	470	87
AM10CW-4815DLPZ	48 (18-75)	±15	5	250	±333	330	87
AM10CW-4824DLPZ	48 (18-75)	±24	5	250	±208	100	87

Input Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage Types			4:1	
Filter	Pi Filter			
Startup time		10		mS
Startup input voltage	24Vin models		9	VDC
	48Vin models		18	VDC
Input under-voltage lockout	24Vin models	≥5.5	6.5	VDC
	48Vin models	≥12	15.5	VDC
Absolute maximum rating	24Vin models, 1 sec.	≥-0.7	50	VDC
	48Vin models, 1 sec.	≥-0.7	100	VDC
Input reflected current		30		mA
On/Off control	ON - open or pulled high (2.7- 9 VDC) OFF - pulled low to GND (0 - 1.2 VDC), idle current 10mA max.			

Isolation Specification				
Parameters	Conditions	Typical	Maximum	Units
Tested isolation voltage	Input / output 60 sec, $\leq 1\text{mA}$	1500		VDC
Resistance	500VDC	≥ 1000		M Ω
Capacitance	Input to output, 100KHz/0.1V	2000		pF



Output Specification				
Parameters	Conditions	Typical	Maximum	Units
Voltage Tolerance	Full load @Vin (nom.)	± 1	± 3	%
Line regulation	Single, Full load	± 0.2	± 0.5	%
	Dual, Full load	± 0.5	± 1	%
Load regulation	Single, Full load	± 0.5	± 1	%
	Dual, Full load	± 0.5	± 1.5	%
Cross Regulation	Dual output models, 50% load on 1st output and 100% load on 2nd output		± 5	%
Transient recovery time	25% load step change	300	500	μs
Transient recovery deviation	25% load step change, 3.3/5/ $\pm 5\text{V}_{\text{out}}$ models	± 3	± 7	%
	25% load step change, others	± 3	± 5	%
Ripple & Noise	20MHz bandwidth	50	100	mV pk-pk

General Specifications					
Parameters	Conditions	Minimum	Typical	Maximum	Units
Switching frequency	100% load		300		KHz
Over Current protection	Input voltage range	110	140		%Io
Over voltage protection	Input voltage range	110		160	%Vo
Short Circuit Protection	Continuous, Auto recovery				
Operating temperature	With derating	-40		85	$^{\circ}\text{C}$
Storage temperature		-55		125	$^{\circ}\text{C}$
Temperature coefficient	100% Load			± 0.03	%/ $^{\circ}\text{C}$
Cooling	Free air convection				
Humidity	Non-condensing	5		95	% RH
Maximum soldering temperature	1.5mm from case for 10 sec			+300	$^{\circ}\text{C}$
Case material	Aluminum alloy				
Weight			15		g
Dimensions (L x W x H)	1.00 x 1.00 x 0.47 inches (25.40 x 25.40 x 12.00 mm)				
MTBF	$> 1\,000\,000$ hrs (MIL-HDBK -217F, $t=+25^{\circ}\text{C}$)				
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C , humidity $<75\%$, nominal input voltage and at rated output load unless otherwise specified.					

Safety Specifications		
Parameters		
Standards	Designed to meet UL/EN/IEC62368-1	
	EMI - Conducted and radiated emission	CISPR32/EN55032, Class B
	Electrostatic Discharge Immunity	IEC/EN 61000-4-2

RF, Electromagnetic Field Immunity	IEC/EN 61000-4-3
Electrical Fast Transient/Burst Immunity	IEC/EN 61000-4-4
Surge Immunity	IEC/EN 61000-4-5
RF, Conducted Disturbance Immunity	IEC/EN 61000-4-6


Derating

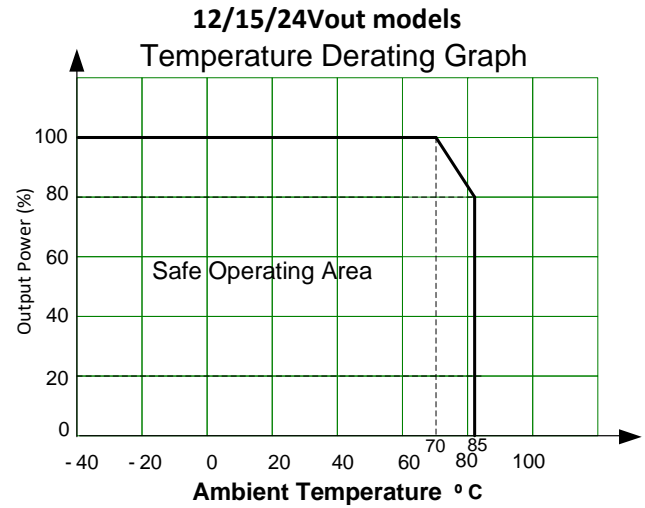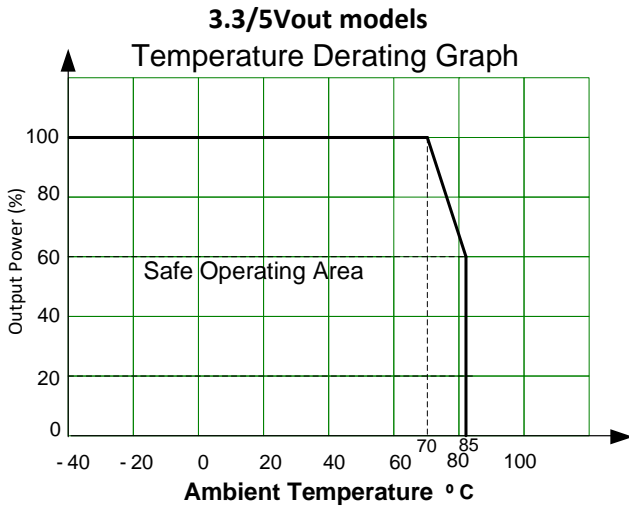

Typical Application Circuit




Single output models

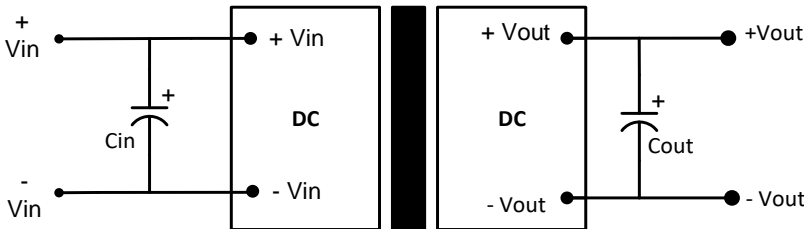


Single Output Models			
Vin	Cin	Vout	Cout
24VDC	100μF/50V	3.3VDC	10μF/50V
48VDC	47μF/100V	5VDC	
		9VDC	
		12VDC	
		15VDC	
		24VDC	

Dual output models

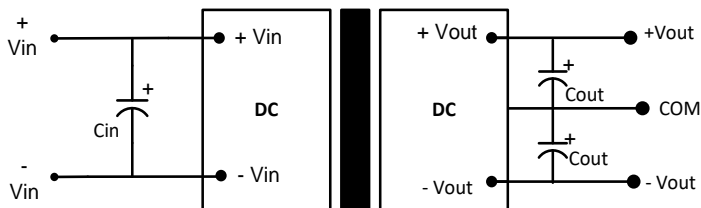


Dual Output Models			
Vin	Cin	Vout	Cout
24VDC	100μF/50V	±5VDC	10μF/50V
48VDC	47μF/100V	±9VDC	
		±12VDC	
		±15VDC	
		±24VDC	

EMC Application Circuit

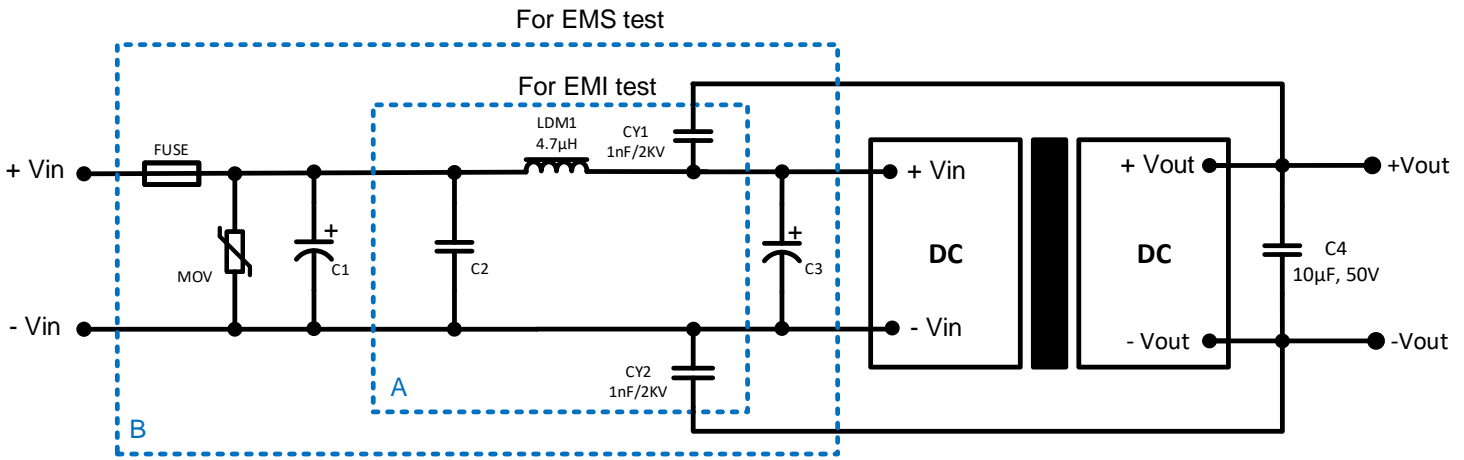

	24Vin	48Vin
MOV	20D470K	14D101K
C1/C3	330 μ F/50V	330 μ F/100V
C2	1 μ F/50V	1 μ F/100V

Dimensions

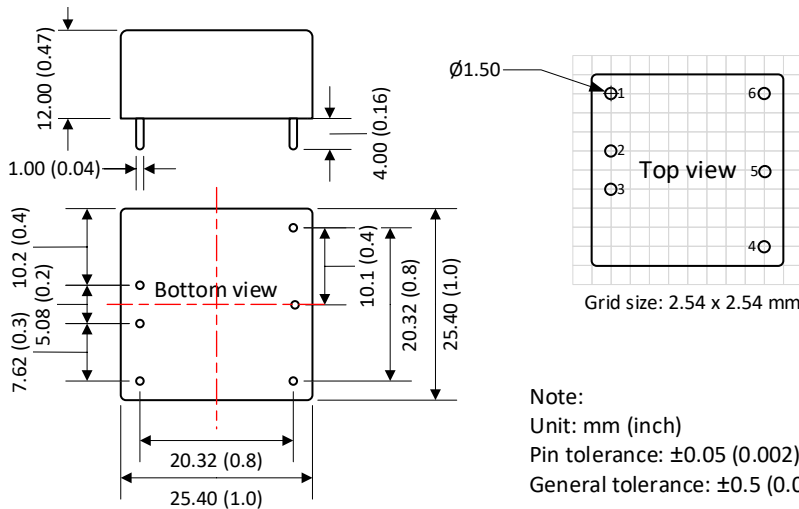

Pin	Pin Out Specifications	
	Single	Dual
1	Remote On/Off	Remote On/Off
2	-V Input	-V Input
3	+V Input	+V Input
4	+V Output	+V Output
5	No Pin	Com
6	-V Output	-V Output

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.