

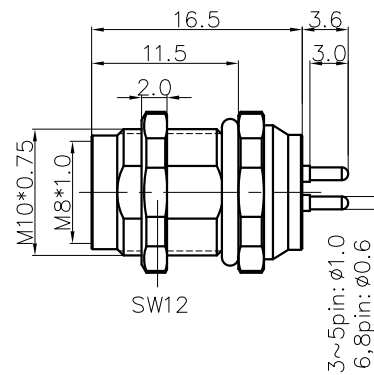


REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|



Panel cut

SP-M8X-XXP-FF-SF7001-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min

- Levels of protection: IP67
- Wire connection mode: soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Range: 2.0~4.5mm
- RoHS Compliance

- 8.Tolerance :
- .X ±0.25mm
 - .XX ±0.1mm
 - ∠ ±1°

| | 3pin A Coding | 4pin A Coding | 5pin B Coding | 6pin A Coding | 8pin A Coding |
|---|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| C | | | | | |
| | Pin Assignment Front View | Pin Assignment Front View | Pin Assignment Front View | Pin Assignment Front View | Pin Assignment Front View |
| B | | | | | |
| A | PCB layout | PCB layout | PCB layout | PCB layout | PCB layout |

| | | | | |
|------------------------|--------------------------------|-----------------------------------|---|-------|
| DETACHED LISTS | PART NO.: SPM8XXXPFFSF700100AH | | 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | |
| | APPD: | NAME: SP-M8X-XXP-FF-SF7001-00A(H) | | |
| | CHKD: | TITLE: CUSTOMER DRAWING | | |
| | DRFT: SQ 2019.05.17 | REV | D0-1 | |
| THIRD ANGLE PROJECTION | | DRAWING NO.: XXXXXXXX-XX-CXX | SHEET | 1/1 |
| | | MM (INCH) | DO NOT SCALE DRAWING | SCALE |