

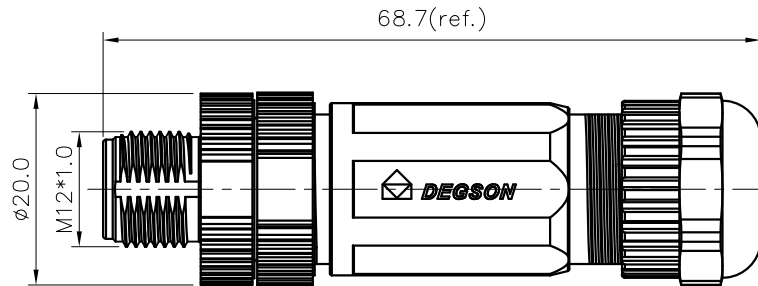


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



metal

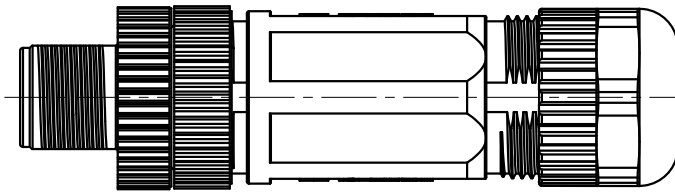

PASH-M12X-XXP-MM-SL700X-00A(H)  
 Coding: A,B,D  
 001: Cable OD: 4.5~6.0mm  
 002: Cable OD: 6.0~7.5mm  
 Pin number: 03,04,05, 06,08,10,12

- NOTES:
- Rated voltage/current : 3pin A: 250V / 4A  
 4pin A: 250V / 4A  
 5pin A: 60V / 4A  
 6pin A: 30V / 2A  
 8pin A: 30V / 2A  
 10pin A: 30V / 1.5A  
 12pin A: 30V / 1.5A  
 5pin B: 60V / 4A  
 4pin D: 250V / 4A
  - Withstanding voltage : 3,4pin A: AC1500V/1Min  
 5pin A: AC1120V/1Min  
 6,8,10,12pin A: AC500V/1Min  
 5pin B: AC1120V/1Min  
 4pin D: AC1500V/1Min

- Levels of protection: IP67
- Wire range :  
 3pin A: 24~20AWG/0.25~0.52mm<sup>2</sup>  
 4pin A: 24~20AWG/0.25~0.52mm<sup>2</sup>  
 5pin A: 24~20AWG/0.25~0.52mm<sup>2</sup>  
 6pin A: 24~22AWG/0.25~0.34mm<sup>2</sup>  
 8pin A: 24~22AWG/0.25~0.34mm<sup>2</sup>  
 10pin A: 26~24AWG/0.14~0.25mm<sup>2</sup>  
 12pin A: 26~24AWG/0.14~0.25mm<sup>2</sup>  
 5pin B: 24~20AWG/0.25~0.52mm<sup>2</sup>  
 4pin D: 24~20AWG/0.25~0.52mm<sup>2</sup>
- Cable OD: 4.5~7.5mm
- Wire connection mode: soldering
- Operating temperature: -40°C~+105°C
- RoHS Compliance
- Tolerance : ±0.5mm

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding	
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	
3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

DETACHED LISTS	PART NO.: PASHM12XXXPMMSL700X00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PASH-M12X-XXP-MM-SL700X-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1	SHEET: 1/1	SCALE: 1:1
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX (MM (INCH))		
		DO NOT SCALE DRAWING		