

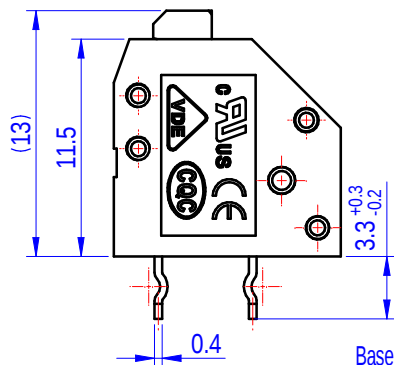
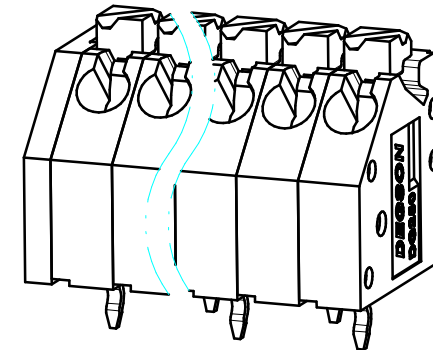
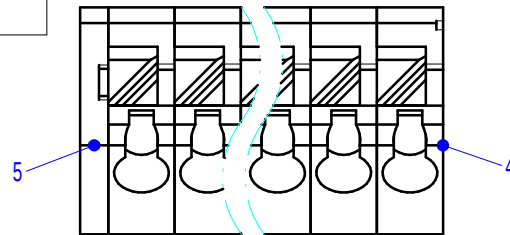


未注公差/General tolerances(mm)														 0.1/10  ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

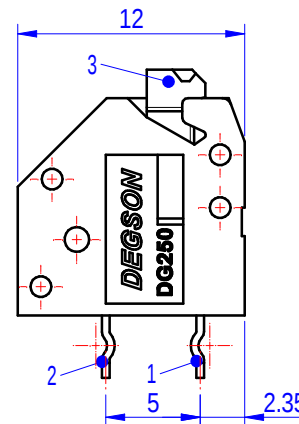

Based on this view,
the first pin header
is in front.

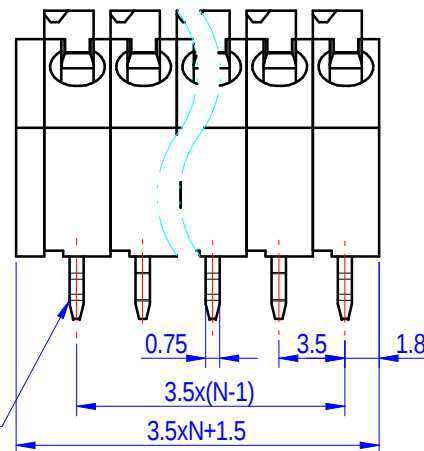

5	Cover	PA66	UL94V-0
4	Housing	PA66	UL94V-0
3	Button	PA66	UL94V-0
2	Small Pin header	Copper alloy	Sn Plated
1	Big Pin header	Copper alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Oversoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/5	/
工频耐压/Withstanding voltage(V/1Mn)	AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22~ 16/ 0.2~ 0.75,1.5(ssl)		
间距/Pitch(mm)/线数范围/Poles	3.5/NF 02~ 24P, 45P		
剥线长度/Stripping length(mm)	8.5~ 9.5		
使用温度范围/Operating temperature(°C)	-40~ +105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

			MATERIAL:		SURFACE/COLOR:	
			MAT NO./REV: / 00		MAT STATUS: 批量	
APPD: 兰春华	2024.10.12	NAME DG250-3.5-XXP-1Y-01A&Z(H)				
CHKD: 陈招	2024.10.11					
DRFT: 陈兰馨	2024.10.11	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200025876	CUSTOMER DRAWING	已发布	2.5:1	1/1

01		修改线径	陈兰馨	2024.10.11
REV	ECN	DESCRIPTION	DRFT	DATE