


CS3225X7R226K250NRL

General







Description : 1210(inch base) / 3225(mm base), X7R, 22 μ F, $\pm$ 10%, 25V



Specifications			
Capacitance	22.00	μF	
Tolerance	±10%		
Temperature Characteristic	X7R	(-55 to 125°C)	
Temperature Coefficient	±15%		
Rated Voltage	25	V	

Shape & Dimensions			
Size code	(mm/inch)	3225 / 1210	
L	(mm)	3.20 $\pm$ 0.40	
W	(mm)	2.50 $\pm$ 0.25	
T	(mm)	2.50 $\pm$ 0.25	

Electrical Characteristics Data

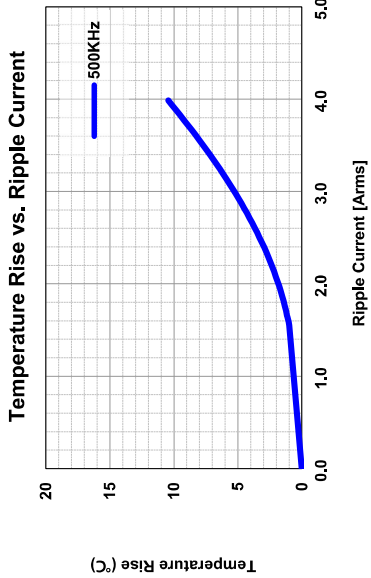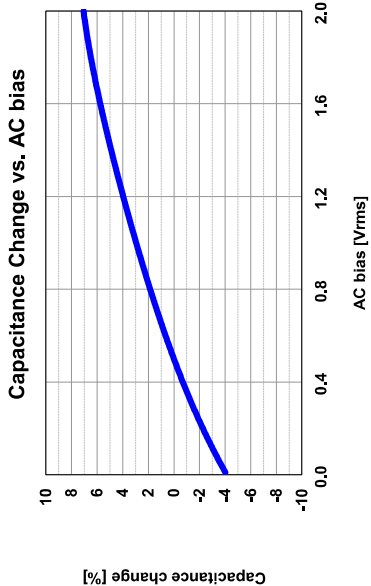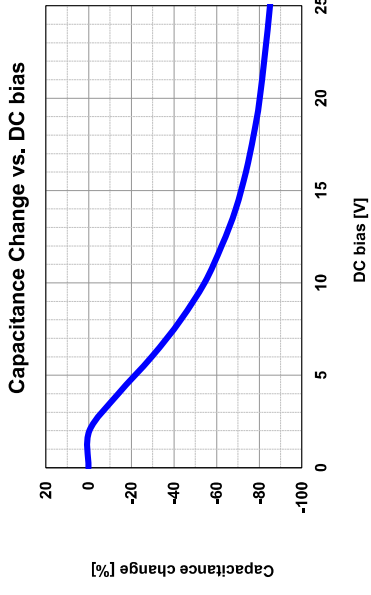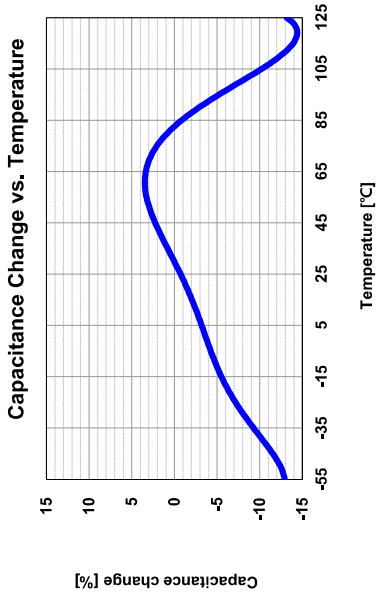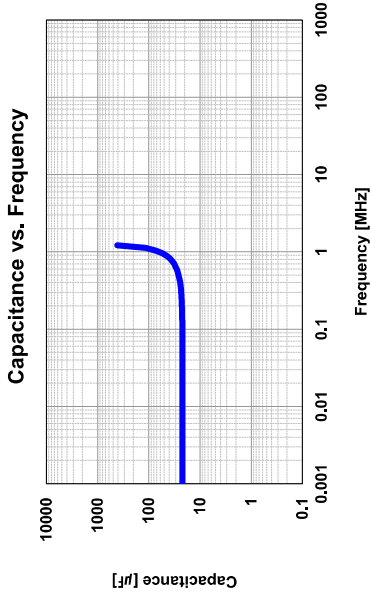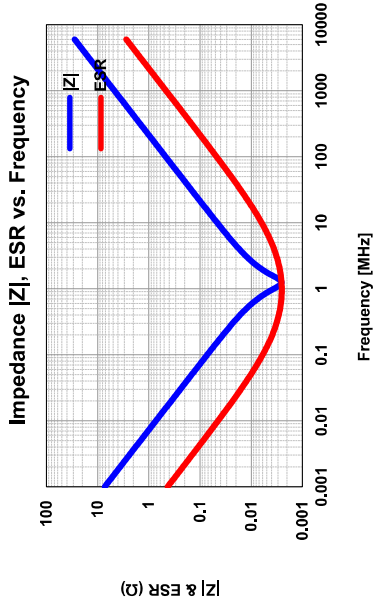

※ The data provided is for reference only, and electrical characteristics may vary based on measurement conditions or environment. This datasheet is subject to change without prior notice.