

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交还本文件的内容, 侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3


2

3




4

5





6



DGH4J-01P-1Y-00A&Z(H)

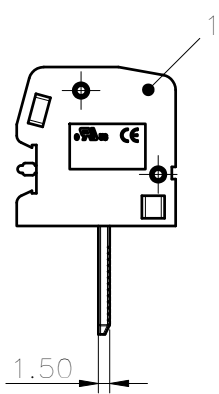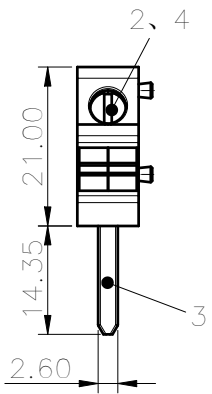



DGH4K-01P-1Y-00A&Z(H)



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

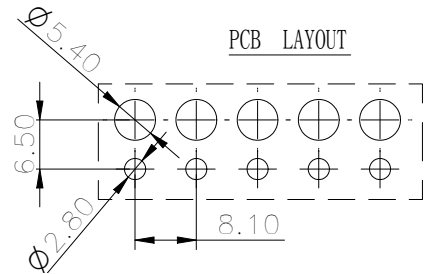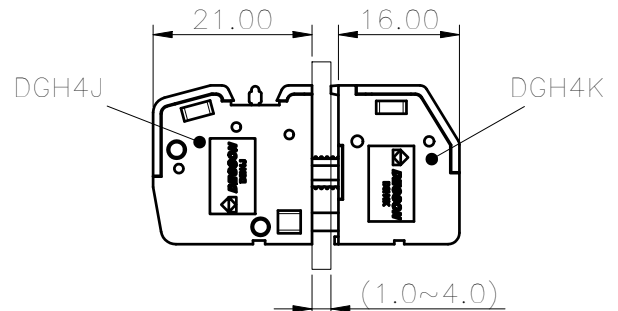

Note:The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Housing2	PA66	UL94V-0
4	Cage	Copper alloy	M3/Ni Plated
3	Current Carrier	Copper alloy	Sn Plated
2	Screw	Copper alloy	M3/Sn Plated
1	Housing1	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	300/30	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	400/41	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/7.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	30~10/ 0.2~6		
间距/Pitch(mm)/线数范围/Poles	8.10/N=01P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE:
APPD: 蓝贵凡		MAT NO./REV:	MAT STATUS: 批量
CHKD: 曹利彬		NAME	
DRFT: 孙科豪		DGH4-01P-1Y-00A&Z(H)	
2022.12.06		DRAWING NO.	TYPE
2022.12.06		200016546	CUSTOMER DRAWING
2022.12.06		DRAWING STATUS	SCALE
2022.12.06		已发布	2:1
2022.12.06		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				