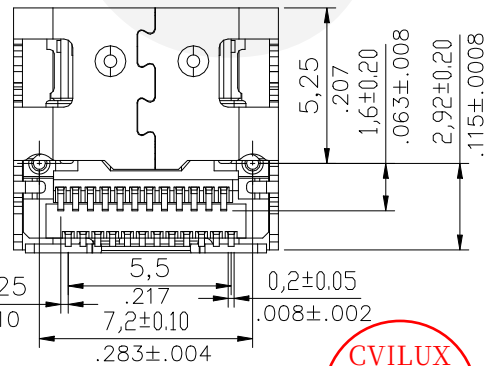
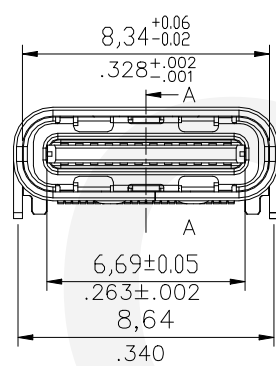
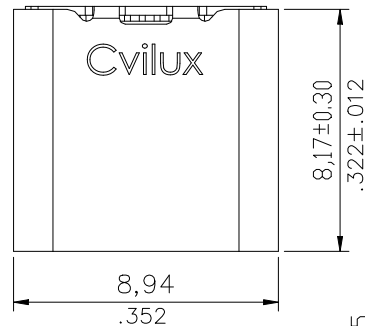


MATERIAL:

- 1.HOUSING: LCP, GLASS FIBER FILLED, BK
- 2.CONTACT: COPPER ALLOY (t=0.12mm).
- 3.GUARD PLATE: STAINLESS STEEL, T=0.10mm
- 4.SHELL: STAINLESS STEEL (t=0.30mm).

FINISH:

- CONTACT: SEE ORDER INFORMATION
SHELL: NICKEL PLATING

Ordering Code:

CU32 24 S * S B L R 022 -NH -1
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:CU32
- ② No. of Circuits: 24Pin
- ③ Contact type: S=Socket
- ④ Plating option:

A= Gold flash plated on Contact area,
Matte Tin plated on Solderails,
Nickel underplating over all

B= 15u" gold plated on Contact area,
Matte Tin plated on Solderails,
Nickel underplating over all

C= 30u" gold plated on Contact area,
Matte Tin plated on Solderails,
Nickel underplating over all

- ⑤ Shell Material & Plating: S=Stainless Steel
- ⑥ Contact Material: B=Copper Alloy
- ⑦ Insulator Material & Color option:
L=LCP Black
- ⑧ Packing: R= Tape & Reel
- ⑨ -NH= For Lead Free wave or IR Reflow
Processes & Halogen Free

0.10
0.004


Halogen-Free

RoHS Compliant

CVILUX
2023.05.18
ISSUED

4					DATE	UNIT: mm / inch	TITLE:
3							CU32Type C/F 24 PIN CH=1.68mm SMT TYPE TOP MOUNT TYPE
2					DRAWN BY: Annie	05/15-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED
1					ENGINEER: Annie	05/15-23'	.X ± 0.30/.012 X* ± 1"
					CHECKED BY: Keny	05/15-23'	.XX ± 0.20/.008 X* ± 0.5"
					APPROVED BY: Keny	05/15-23'	.XXX ± 0.05/.002 .XX* ± 0.02"
SYM	NAME	DATE	REVISIONS				FINISH:


 瀚荃股份有限公司 Cvilux Corporation			
DRAWING NO.	CU32S28SA	PART NO.	CU3224S*SBLR022-NH-1
SCALE	1 / 1	SHEET	1 OF 3

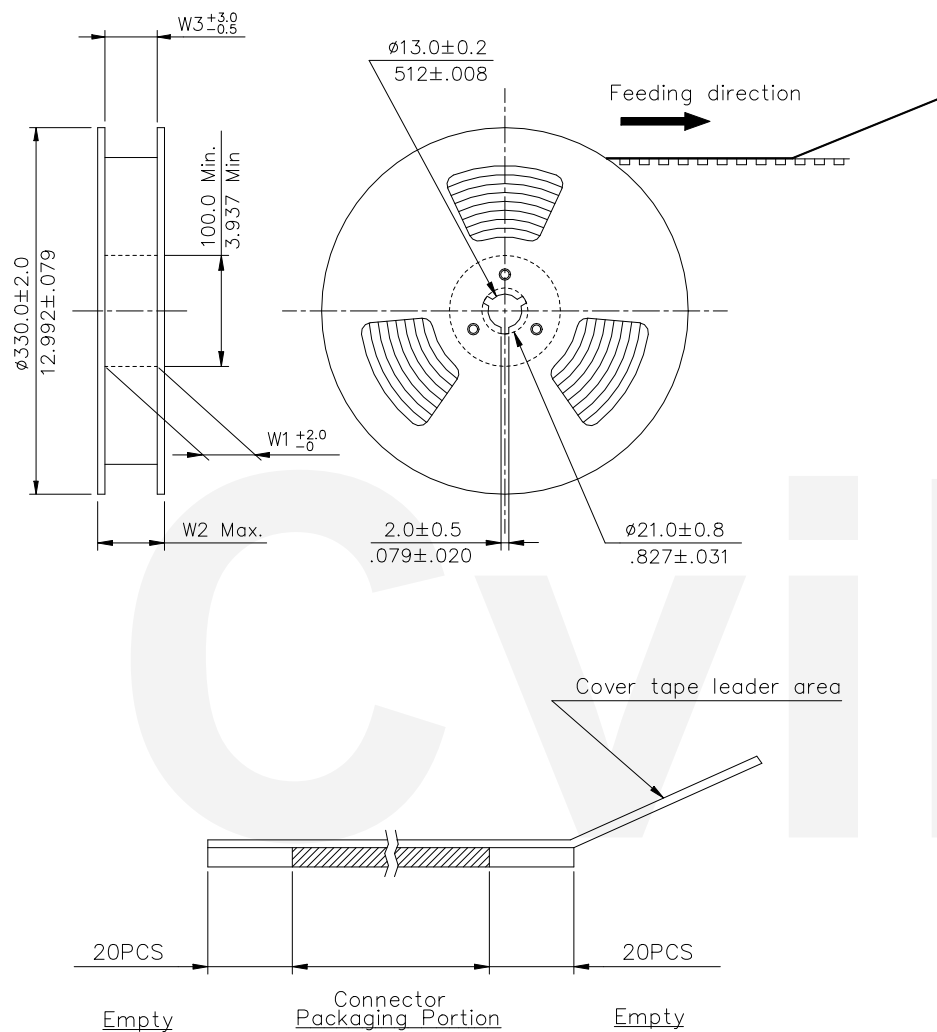


NOTE :

- * Reel Material : HIPS
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 1000 PCS/Reel

Dimension				Packing (Reel/Carton)
E	W1	W2	W3	
24.0(.945)	24.5(.965)	30.5(1.201)	24.5(.965)	10

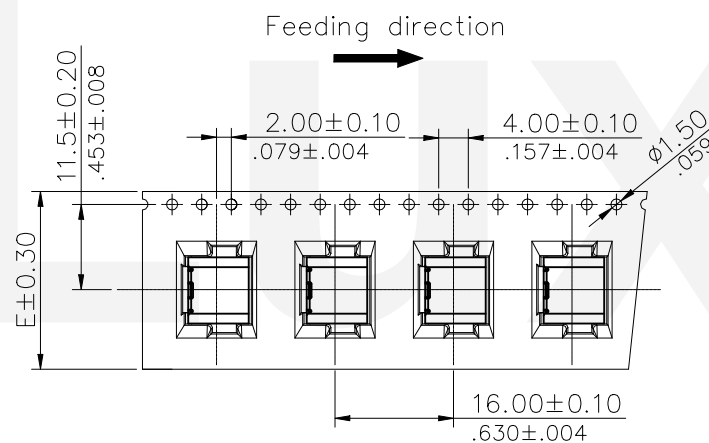

WIDTH : 24 mm Carrier



Halogen-Free RoHS Compliant

4				DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 Cvilux Corporation			
3				DRAWN BY: Annie	05/15-23'	CU32Type C/F 24 PIN CH=1.68mm SMT TYPE TOP MOUNT TYPE				
2				ENGINEER: Annie	05/15-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
1				CHECKED BY: Keny	05/15-23'	.X ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Keny	05/15-23'	.XX ±	FINISH:			
						.XXX ±				

DRAWING NO. CU32S28SA PART NO. CU3224S*SBLR022-NH-1

SCALE SHEET 3 OF 3