



Specifications

Current Rating: 1A AC,DC
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 600V AC/minute
Temperature Range: -50°C ~ +105°C

Material




Insulator: PPS, UL94V-0
Contact: Copper Alloy

ORDER INFORMATION

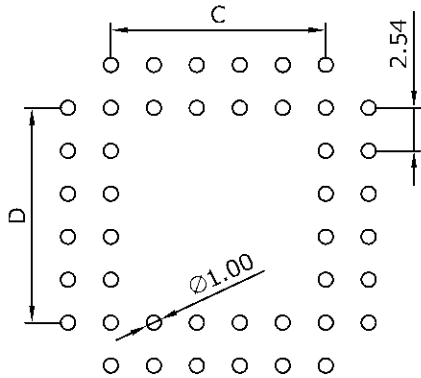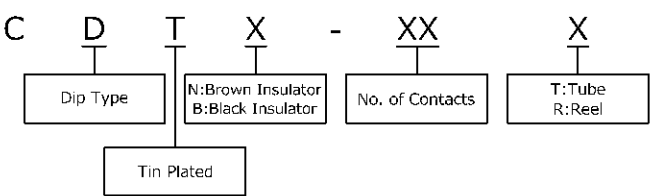

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

No. of Contacts	A	B	C	D
20	15.50	15.50	5.08	5.08
28	18.04	18.04	7.62	7.62
32	18.04	20.60	7.62	10.16
44	23.48	23.48	12.70	12.70
52	25.88	25.88	15.24	15.24
68	31.04	31.04	20.32	20.32
84	36.04	36.04	25.40	25.40

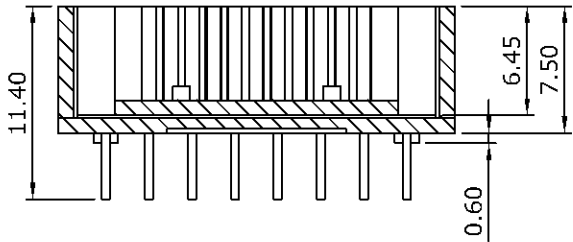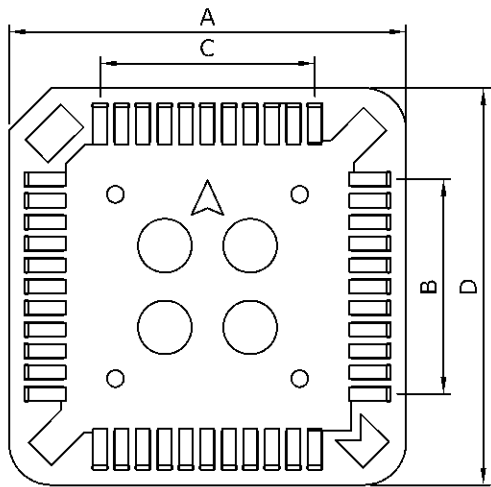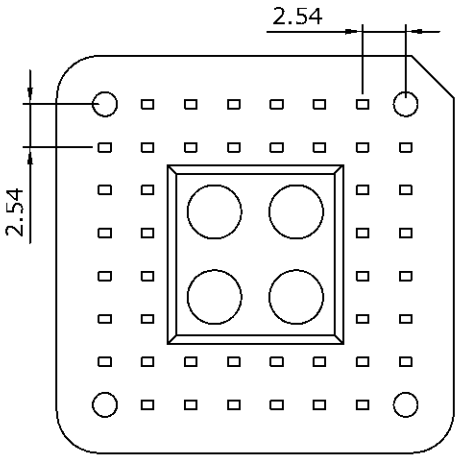

						PART NO.		CDTX-XXX		DATA		2005/06/13		
						DRAWING NO.		CDTX-XXX		DRAWN				
						CUSTOMER P/N				APPROVED				
REV.	DESCRIPTION	DATA	TITLE: PLCC Socket Dip Type			REV. A	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT		mm	