
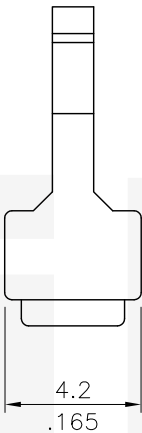


Material: Glass filled polyester UL 94V-0

Ordering Code:

CA11 ** SR 100
① ② ③ ④

- ① Series No.
- ② No. of Circuits
- ③ SR= Strain-Relief
- ④ Color: 100= Black

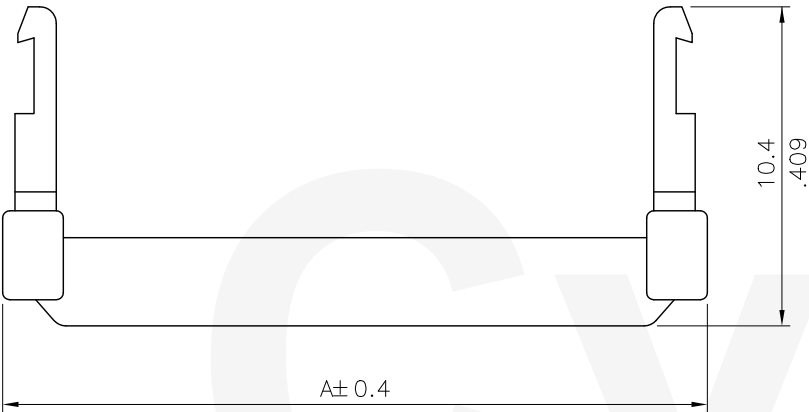

Circuits	Dimension	Circuits	Dimension
	A		A
6	11.2(.441)	30	35.2(1.386)
8	13.2(.520)	32	37.2(1.465)
10	15.2(.598)	34	39.2(1.543)
12	17.2(.677)	36	41.2(1.622)
14	19.2(.756)	40	45.2(1.780)
16	21.2(.835)	44	49.2(1.937)
20	25.2(.992)	50	55.2(2.173)
22	27.2(1.071)	60	65.2(2.567)
24	29.2(1.150)	64	69.2(2.724)
26	31.2(1.228)		

RoHS Compliant

④				CVILUX CORP 2012.09.14 ISSUED			DATE	UNIT: mm / inch		TITLE: 2.00MM(.79") STRAIN RELIEF	 瀚荃股份有限公司 CviLux Corporation			
③					DRAWN BY:	Enya	9/04-12'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
②	Enya	9/4-12'	ECN12218-0 / ECR12063-0		ENGINEER:	Eisley	9/03-12'	.X ± 0.30/.012	X' ± 1'	FINISH:				
①	Enya	8/8-12'	ECN12187-0 / ECR12053-0		CHECKED BY:	Eisley	9/03-12'	.XX ± 0.20/.008	.X ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	9/03-12'	.XXX ±	.XX' ±		DRAWING NO.	CA1102SD	PART NO.	CA11**SR100
										SCALE	3 / 1	SHEET	1 OF 1	