
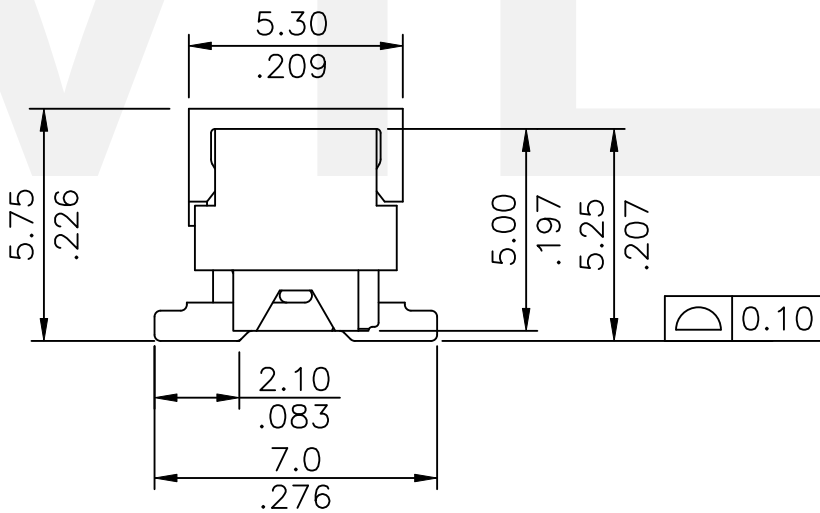
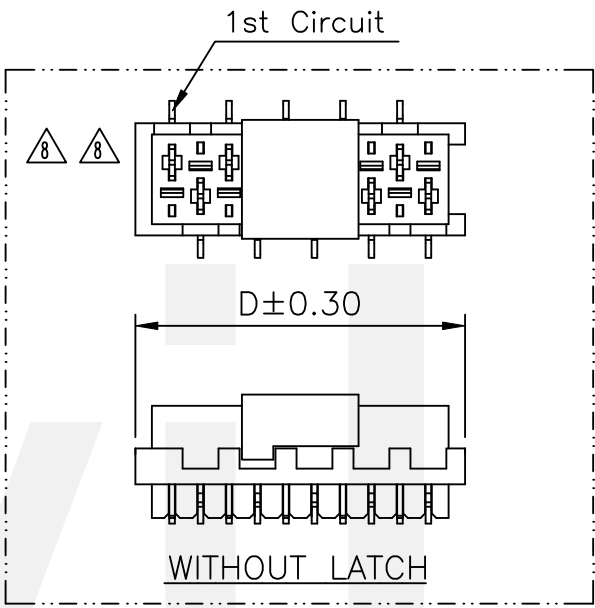



Material:
* Insulation:
High Temperature Plastic UL 94V-0
* Contact: Phosphor Bronze

Ordering Code:
CA32 ** M 1 3 0 0
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.:
- ② No. of Circuits: 04 to 26
- ③ Contacts Type:
M= SMT Type
- ④ Plating option:
1= Matte Tin over Nickel plated
- ⑤ Color: 3= Red
- ⑥ Pad Option: 0= With Pad (Reel Packing)
P= Without Pad (Reel Packing)
D= With Pad (Tube Packing)
T= Without Pad (Tube Packing)
- ⑦ Latch Option: 0= Without Latch
L= With Latch

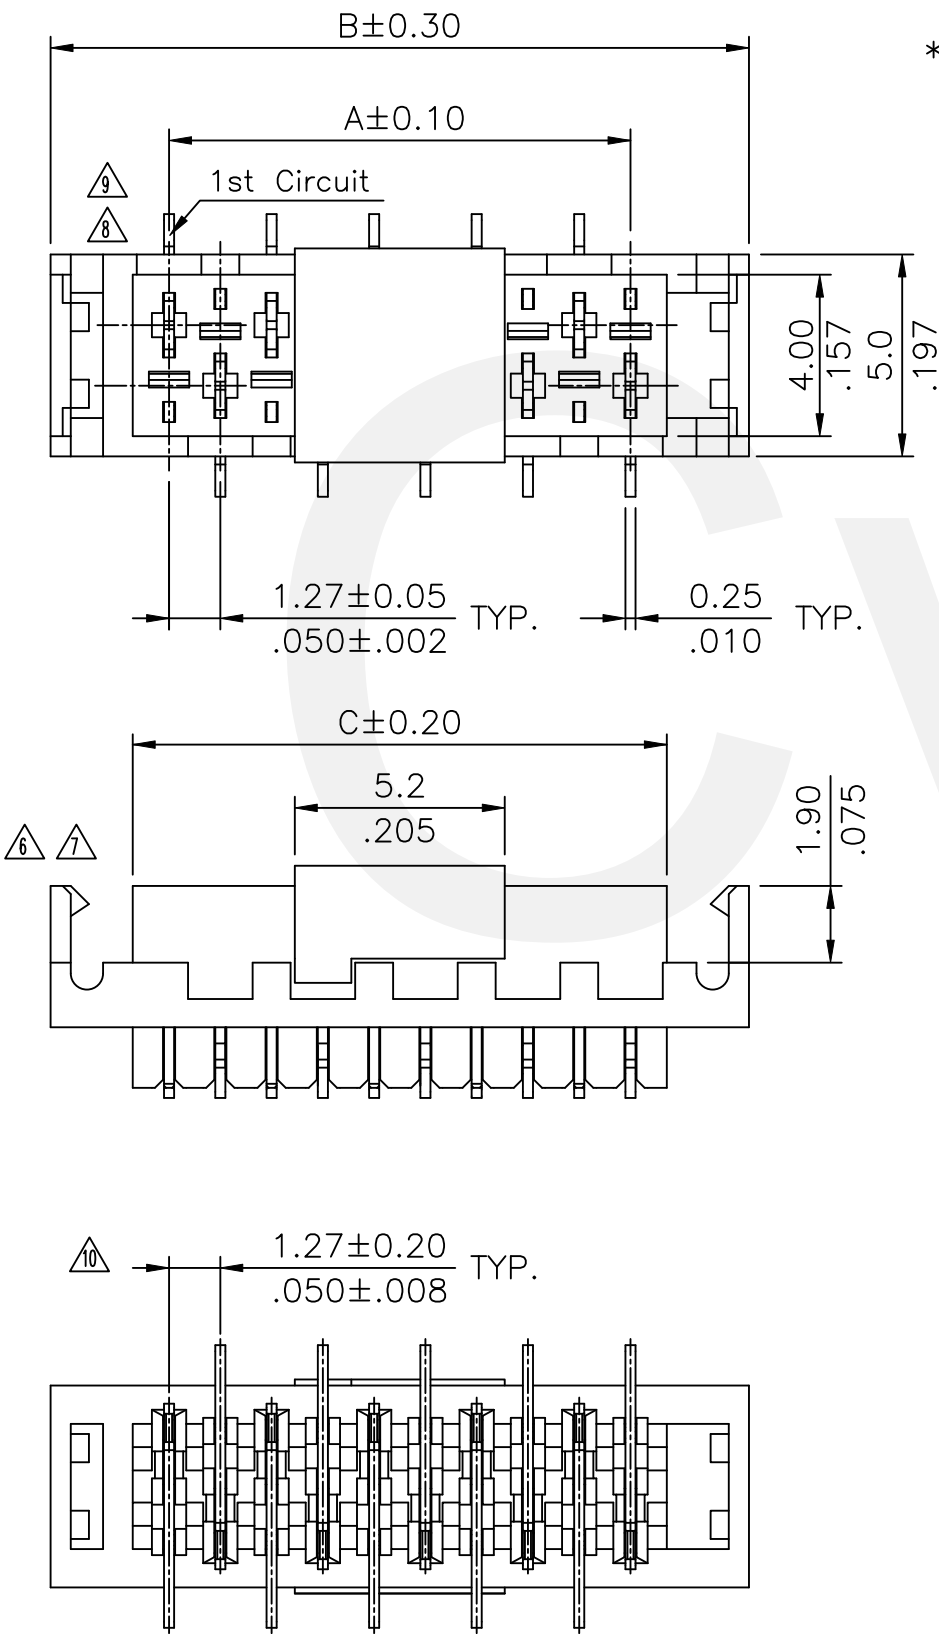


DIM.A= 1.27 x No. of Spaces
DIM.B= DIM.A + 5.87
DIM.C= DIM.A + 1.80
DIM.D= DIM.A + 3.27
*Available in 4 ~ 26 Circuits

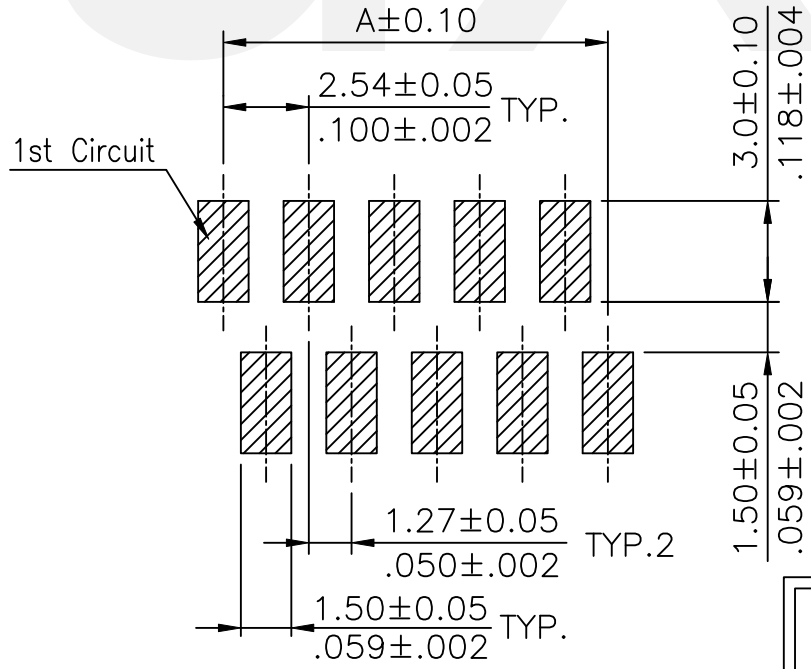

Recommended P.C. Board Layout

Lead Free Process
RoHS Compliant




△10	Roy	5/17-25'	ECRB125014/ECNT125120	CviLux Corp 2025/05/28 ISSUED			DATE	UNIT: mm / inch	TITLE: 1.27mm Pitch Female	 瀚荃股份有限公司 CviLux Corporation			
△9	Jack	11/16-23'	ECNT123267		DRAWN BY:	Roy	5/17-25'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
△8	Kenny	10/8-20'	ECRT120057/ECNT120268		ENGINEER:	Karen	5/17-25'			.X ± 0.3/.012	.X* ± 1"	MATERIAL:	
△7	Kenny	10/8-20'	ECRT120057/ECNT120268		CHECKED BY:	Sun	5/17-25'	.XX ± 0.2/.008	.X* ±				FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	5/17-25'	.XXX ± 0.1/.004	.XX* ±				
										DRAWING NO.	CA3203SK	PART NO.	CA32**M13**
										SCALE	4 / 1	SHEET	1 OF 2

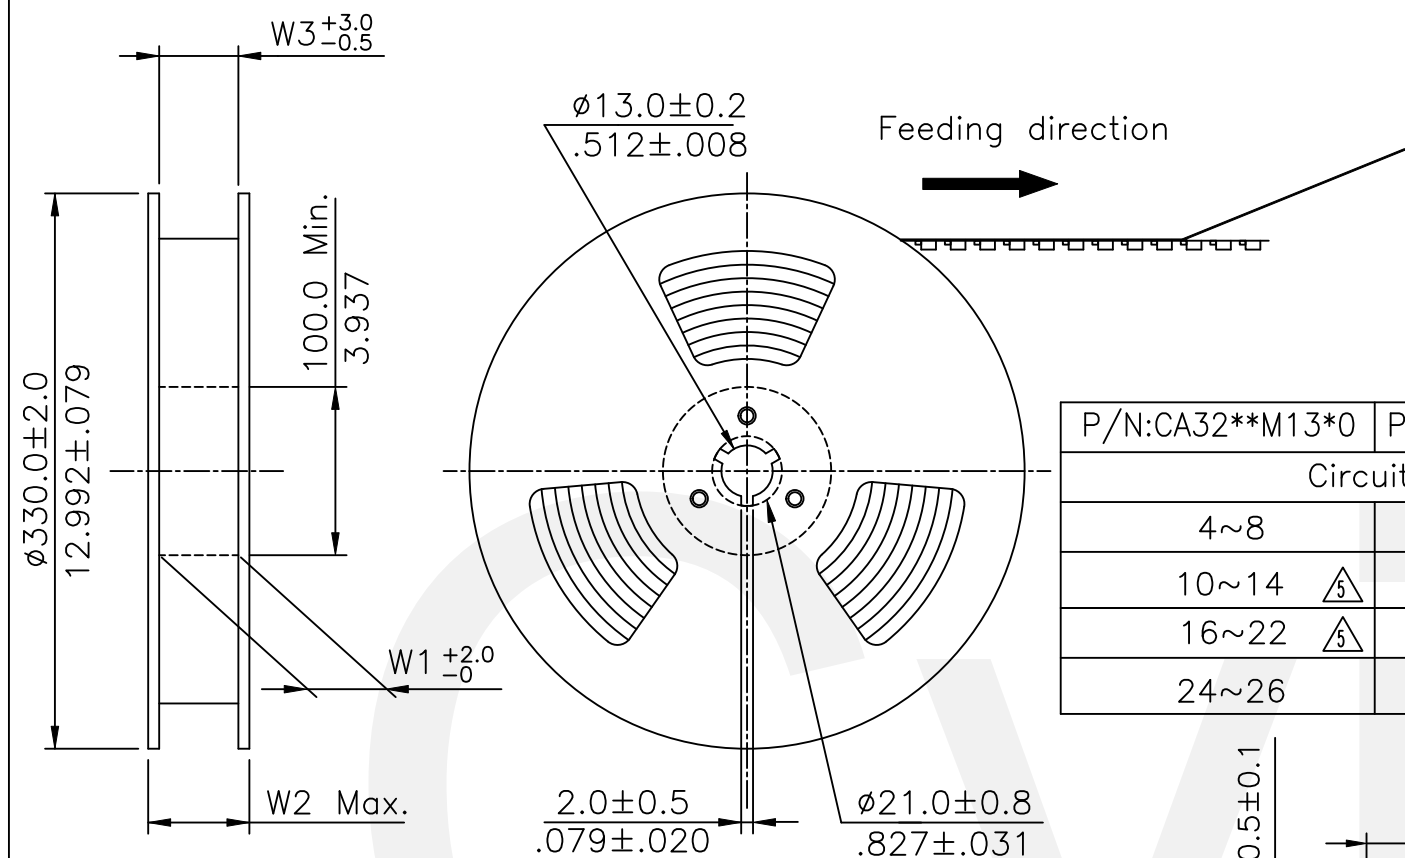



NOTES:

1. Reel Material: HIPS
2. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
3. Carrier camber not to exceed 1 mm in 100 mm.
4. Material :Transparent Anti-static Polysyrene.
5. All dimensions meet EIA-481 requirements.
6. Thickness : $0.40 \pm 0.05\text{mm}$.
7. Quantity : 800 pcs.

P/N:CA32**M13*0		P/N:CA32**M13*L		Dimension					Packing (Reel/Carton)
Circuits				E	F	W1	W2	W3	
4~8		4~8		24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
10~14		10		32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~22		12~20		44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
24~26		22~26		56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

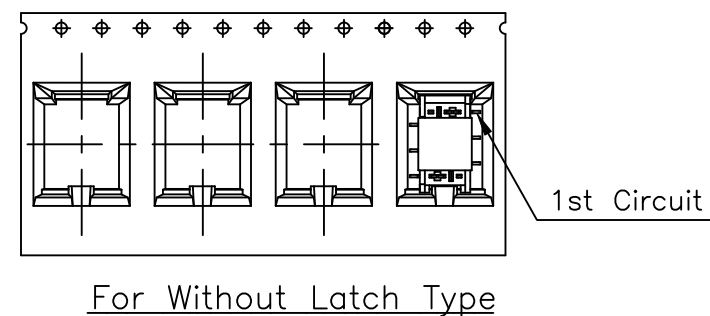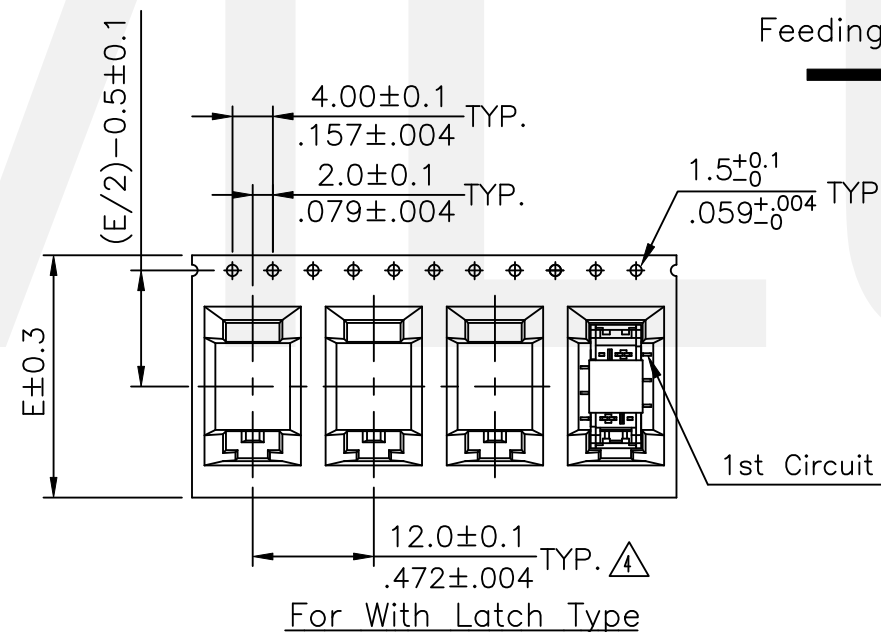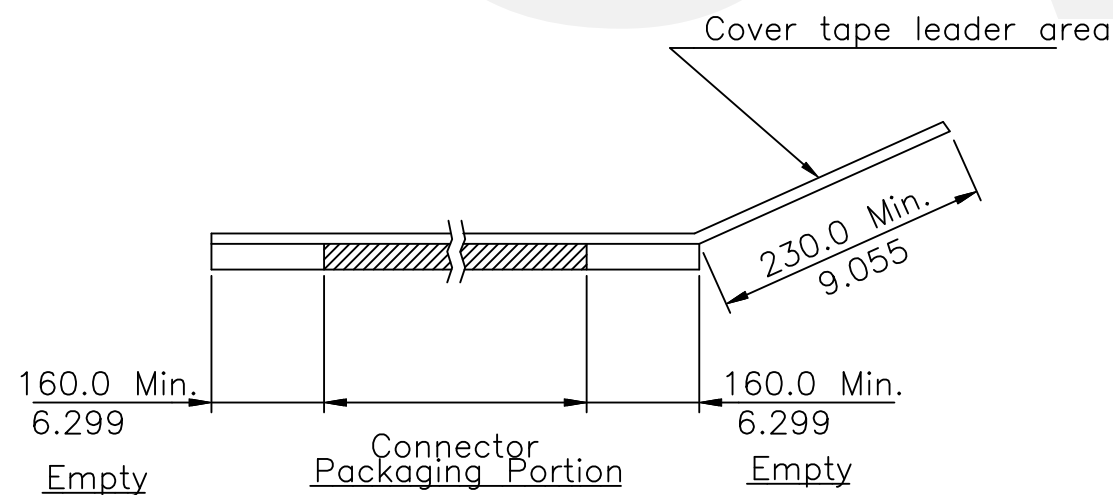

WIDTH : 24 mm Carrier

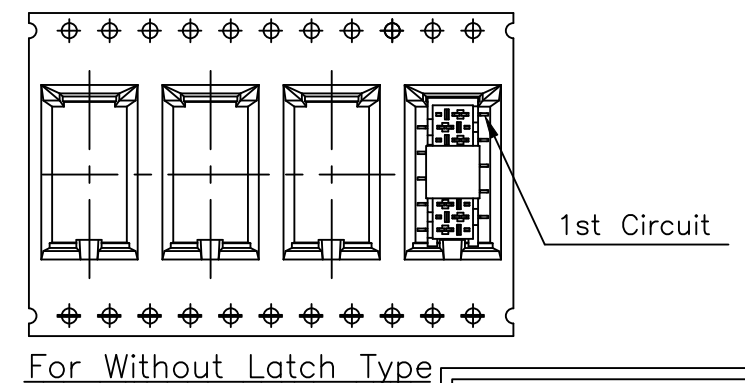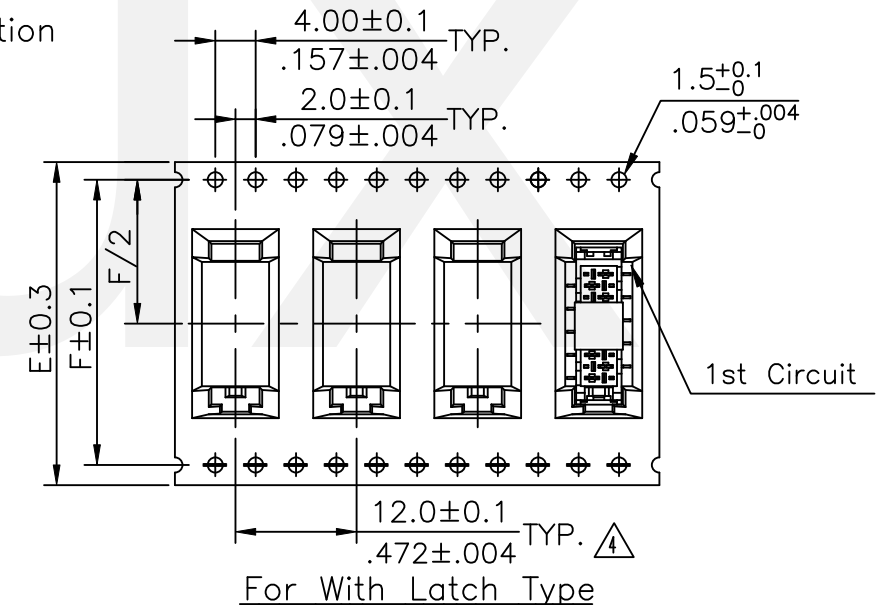

WIDTH : 32.44.56 mm Carrier

RoHS Compliant

	Roy	5/17-25'	ECRB125014/ECNT125120			DATE	UNIT: mm / inch		TITLE: 1.27mm Pitch Female Top entry SMT Type Connector		 瀚荃股份有限公司 CviLux Corporation			
	Jack	11/16-23'	ECNT123267	DRAWN BY:	Roy	5/17-25'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
	Kenny	10/8-20'	ECRT120057/ECNT120268	ENGINEER:	Karen	5/17-25'			MATERIAL:					
	Kenny	10/8-20'	ECRT120057/ECNT120268	CHECKED BY:	Sun	5/17-25'	FINISH:							
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	5/17-25'			.X ±	X' ± 1'	DRAWING NO.	CA3203SK	PART NO.	CA32**M13**
							.XX ±	X' ±	SCALE		SHEET	2 OF 2		
							.XXX ±	.XX' ±						