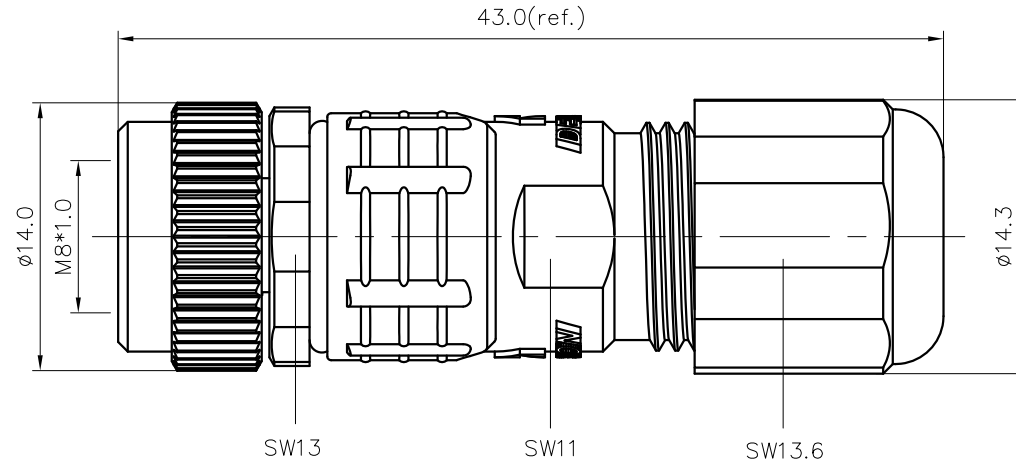



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES:


1. Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
2. Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
3. Levels of protection: IP67
4. Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
5pin: 24~22AWG/0.25~0.34mm²
6pin: 26~24AWG/0.14~0.25mm²
8pin: 26~24AWG/0.14~0.25mm²
5. Cable range : 4~6mm
6. Wire connection mode: soldering
7. Operating temperature: -40°C~+85°C
8. RoHS Compliance
9. Tolerance : ±0.5mm

PA-M8X-XXP-FF-SL7001-00A(H)


Coding: A,B

Pin number: 03,04,
05,06,08


6pin A Coding

Pin Assignment
Front View


8pin A Coding

Pin Assignment
Front View


3pin A Coding

Pin Assignment
Front View

4pin A Coding

Pin Assignment
Front View

5pin B Coding

Pin Assignment
Front View

DETACHED LISTS	PART NO.: PAM8XXXPFFSL700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PA-M8X-XXP-FF-SL7001-00A(H)		
	CHKD:			
	DRFT: SQ 2019.05.17	TITLE: CUSTOMER DRAWING	REV	D0-1
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1