


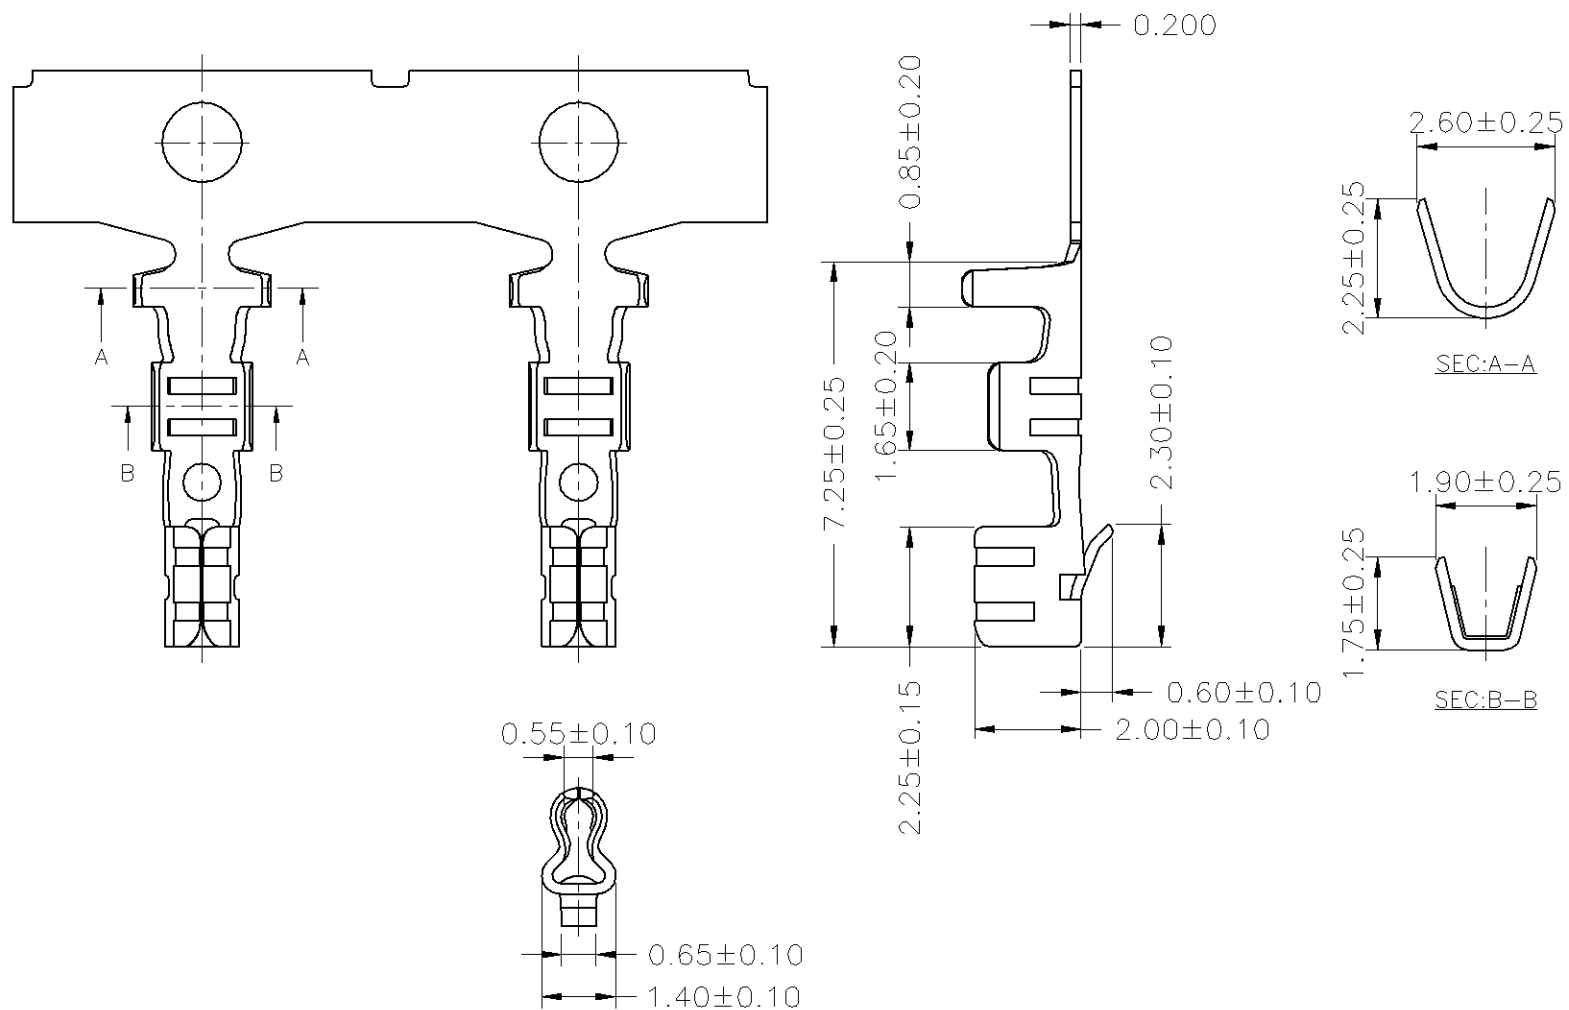

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
T2506-TP	AWG#22-#28	1.90mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

			PART NO.		T2506-TP		DRAWN		Andrew						
			DRAWING NO.		T2506-TP		APPROVED		Brian						
							DATE		2011/11/06						
TITLE: Pitch 2.50mm Terminal			REV. A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	NONE	UNIT	mm	NO.	REV.	REVISION			DATE

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute




Material: Nylon 66,UL94V-0

ORDER INFORMATION

H 2506 - XX

Series No.

No. of Contacts

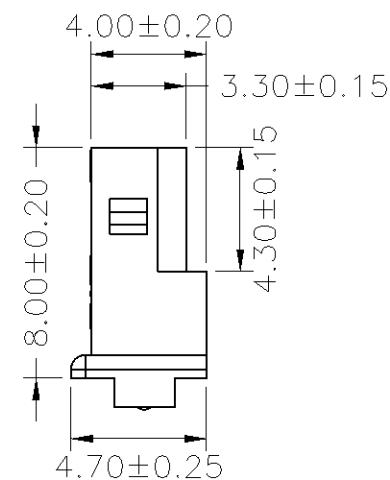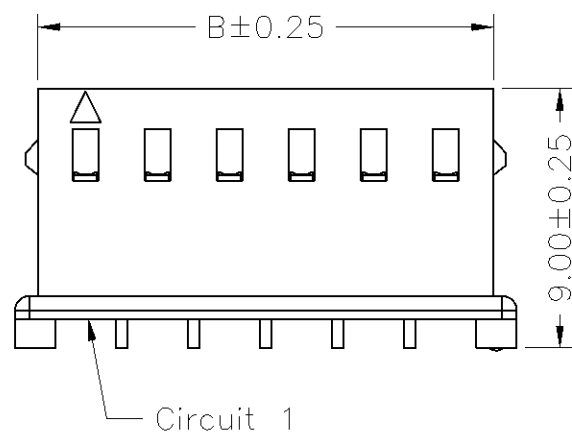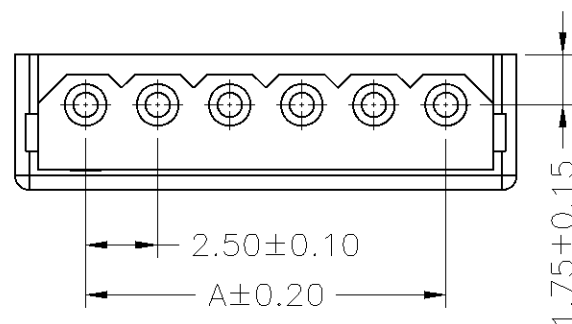

Pin NO.	Dimensions	
	A	B
02P	2.50	5.80
03P	5.00	8.30
04P	7.50	10.80
05P	10.00	13.30
06P	12.50	15.80
07P	15.00	18.30
08P	17.50	20.80
09P	20.00	23.30
10P	22.50	25.80
11P	25.00	28.30
12P	27.50	30.80
13P	30.00	33.30
14P	32.50	35.80
15P	35.00	38.30
16P	37.50	40.80

				PART NO.		H2506-XX		DRAWN		Andrew							
				DRAWING NO.		H2506-XX		APPROVED		Brian							
								DATE		2011/06/05							
TITLE:		2.5mm pitch housing		REV.	A0	TOLERANCE	.X ±0.25	.XX ±0.20	SCALE	NONE	UNIT	mm	NO.	REV.	REVISION		DATE

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0
Pantone Color: 7506C



ORDER INFORMATION

W 2506L - XX




Series No.

No. of Contacts

RoHS

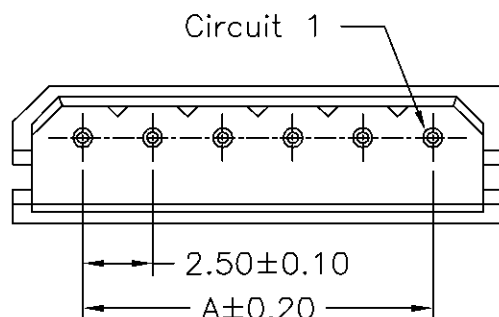

P.C.B LAYOUT

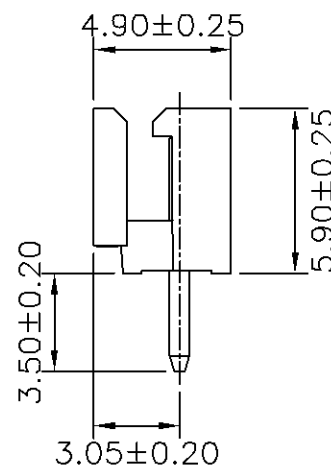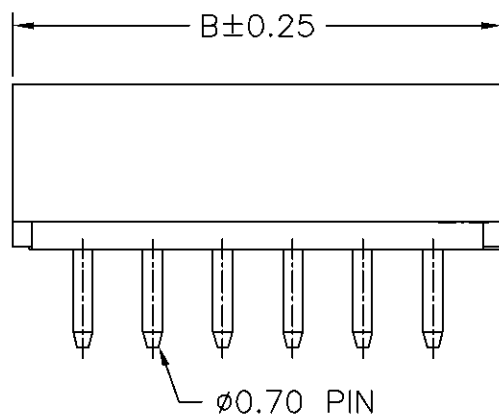

Pin NO.	Dimensions	
	A	B
02P	2.50	7.50
03P	5.00	10.00
04P	7.50	12.50
05P	10.00	15.00
06P	12.50	17.50
07P	15.00	20.00
08P	17.50	22.50
09P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00
16P	37.50	42.50

					PART NO.		W2506L-XX		DATA		2010/07/21	
					DRAWING NO.		W2506L-XX		DRAWN		Sayid	
					CUSTOMER P/N				APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: 2.5mm pitch wafer	REV. A	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm		

SPECIFICATIONS



Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0

ORDER INFORMATION



W 2506R - XX

Series No.

No. of Contacts

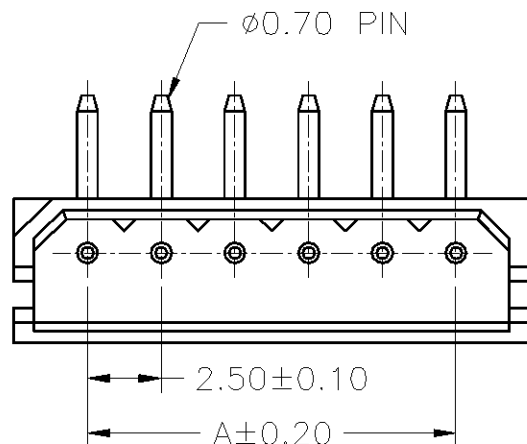

P.C.B. LAYOUT

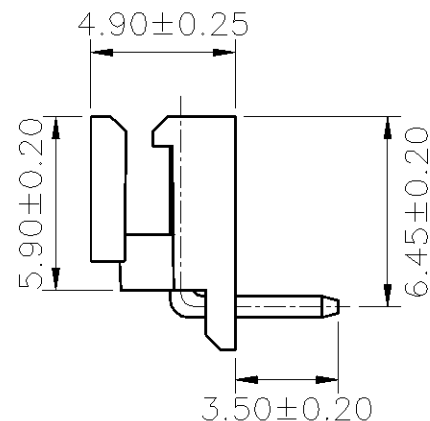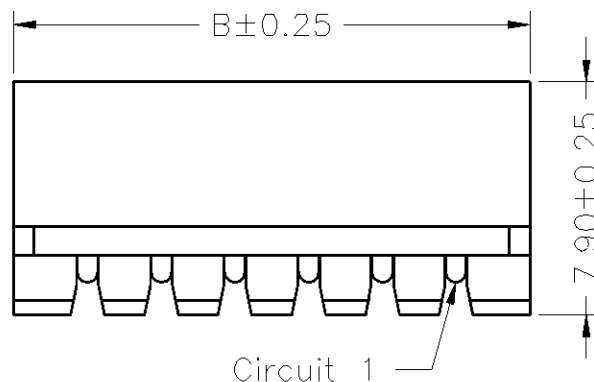

Pin NO.	Dimensions	
	A	B
02P	2.50	7.50
03P	5.00	10.00
04P	7.50	12.50
05P	10.00	15.00
06P	12.50	17.50
07P	15.00	20.00
08P	17.50	22.50
09P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
13P	30.00	35.00
14P	32.50	37.50
15P	35.00	40.00
16P	37.50	42.50

				PART NO.		W2506R-XX		DRAWN		Andrew							
				DRAWING NO.		W2506R-XX		APPROVED		Brian							
								DATE		2011/12/31							
TITLE: 2.5mm pitch Wafer				REV. A0	TOLERANCE	.X ±0.25	.XX ±0.20	SCALE	NONE	UNIT	mm	NO.	REV.	REVISION			DATE