


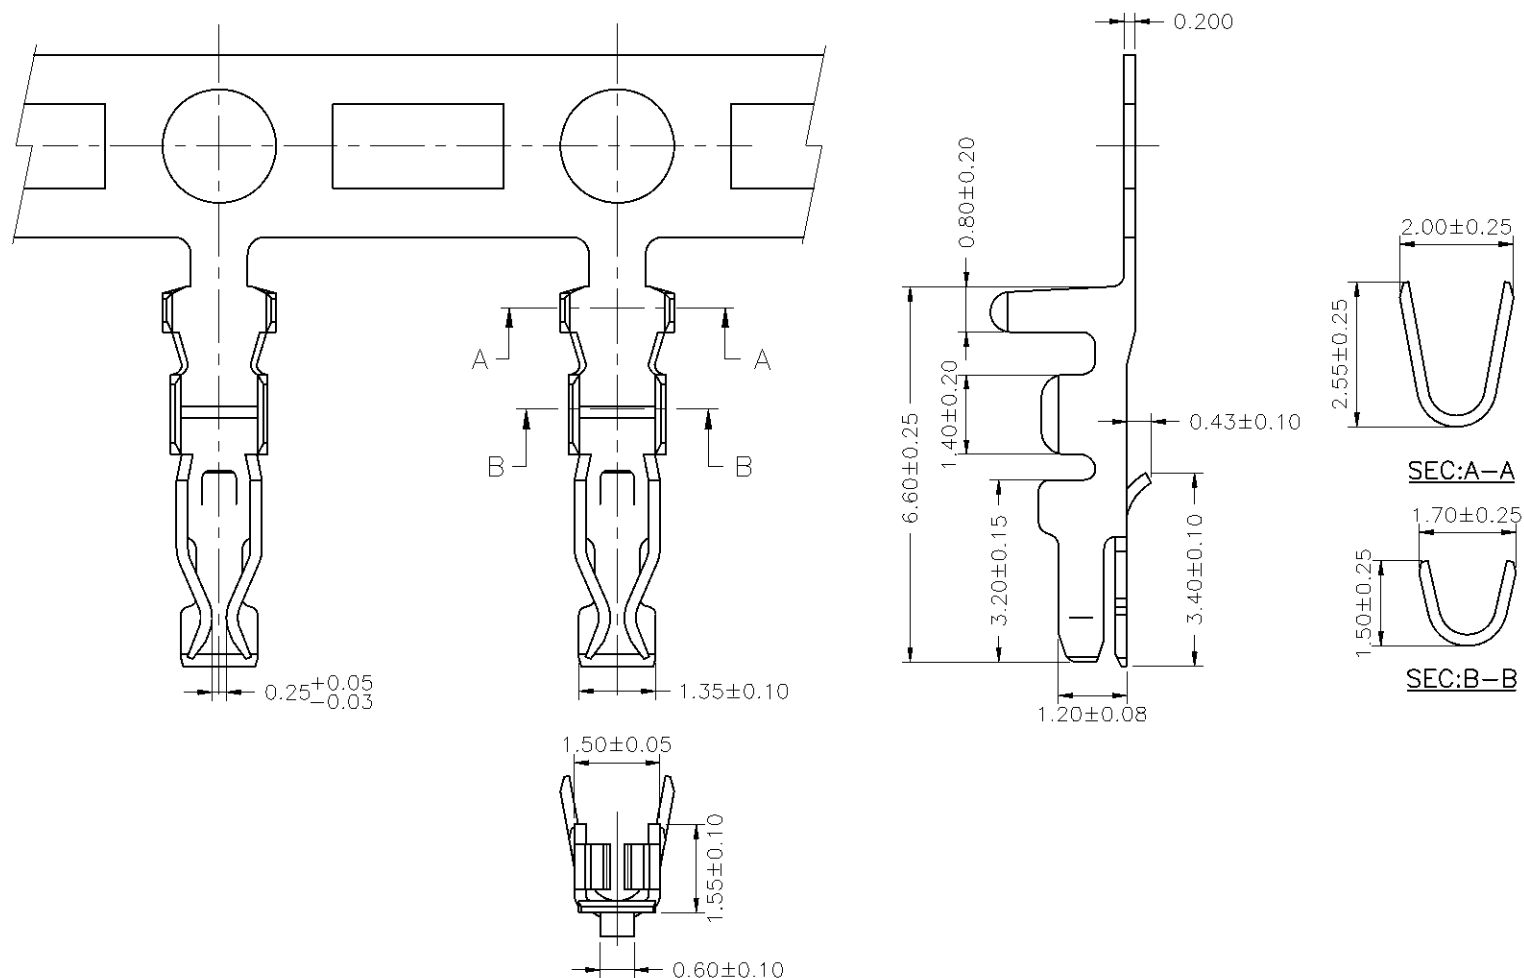

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/Reel
T2004-TP	#22-#28	1.50mm(Max)	Phosphor Bronze	Tin Plated	15,000
T2004-MP	#22-#28	1.50mm(Max)	Phosphor Bronze	Mist Tin Plated	15,000
T2004-GP	#22-#28	1.50mm(Max)	Phosphor Bronze	Gold Plated	15,000

					PART NO.		T2004		DATA		2006/03/04	
					DRAWING NO.		T2004		DRAWN		Sayid	
					CUSTOMER P/N				APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: Pitch 2.00mm Terminal	REV. A	TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	UNIT	mm		

Specifications

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66, UL94V-0

ORDER INFORMATION


H 2004 - 2 XX

Series No.

No. of Contacts



No. of Contacts	Dimensions	
	A	B
2	2.00	5.90
3	4.00	7.90
4	6.00	9.90
5	8.00	11.90
6	10.00	13.90
7	12.00	15.90
8	14.00	17.90
9	16.00	19.90
10	18.00	21.90
11	20.00	23.90
12	22.00	25.90
13	24.00	27.90
14	26.00	29.90
15	28.00	31.90
16	30.00	33.90
17	32.00	35.90
18	34.00	37.90
19	36.00	39.90
20	38.00	41.90

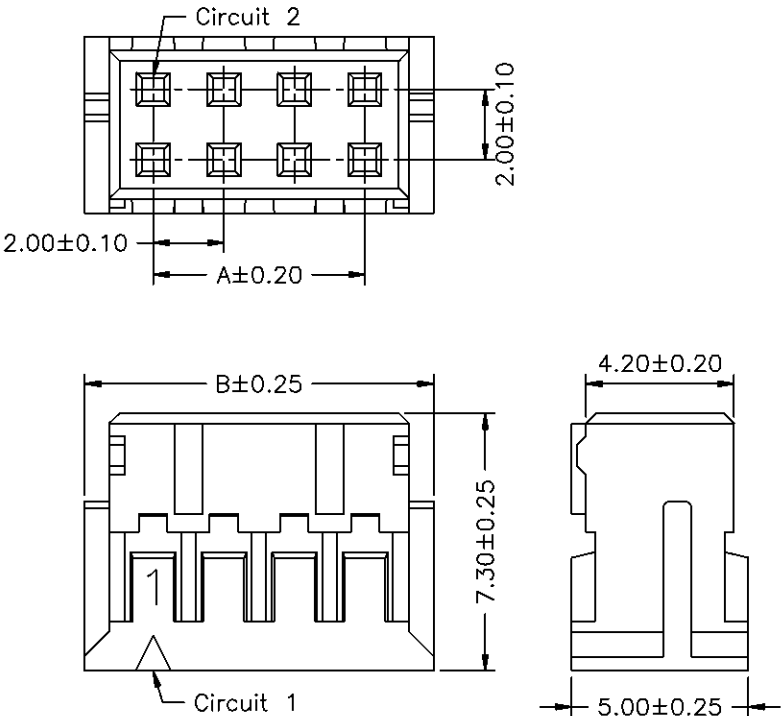


			TITLE: Pitch 2.00mm Housing		REV. A	TOLERANCE		.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm
						PART NO.		H2004-2XX		DATA	2006/03/04	
						DRAWING NO.		H2004-2XX		DRAWN	Sayid	
						CUSTOMER P/N				APPROVED	Max	
REV.	DESCRIPTION	DATA										



Specifications

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66, UL94V-0

ORDER INFORMATION

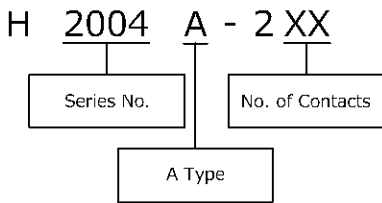

No. of Contacts	Dimensions	
	A	B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50

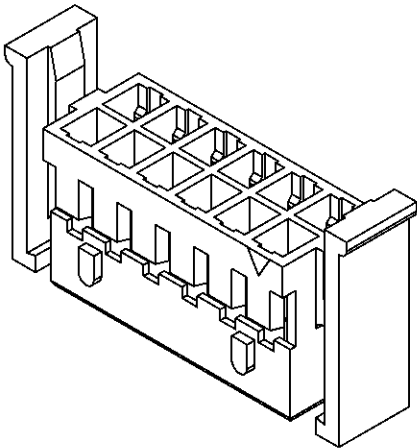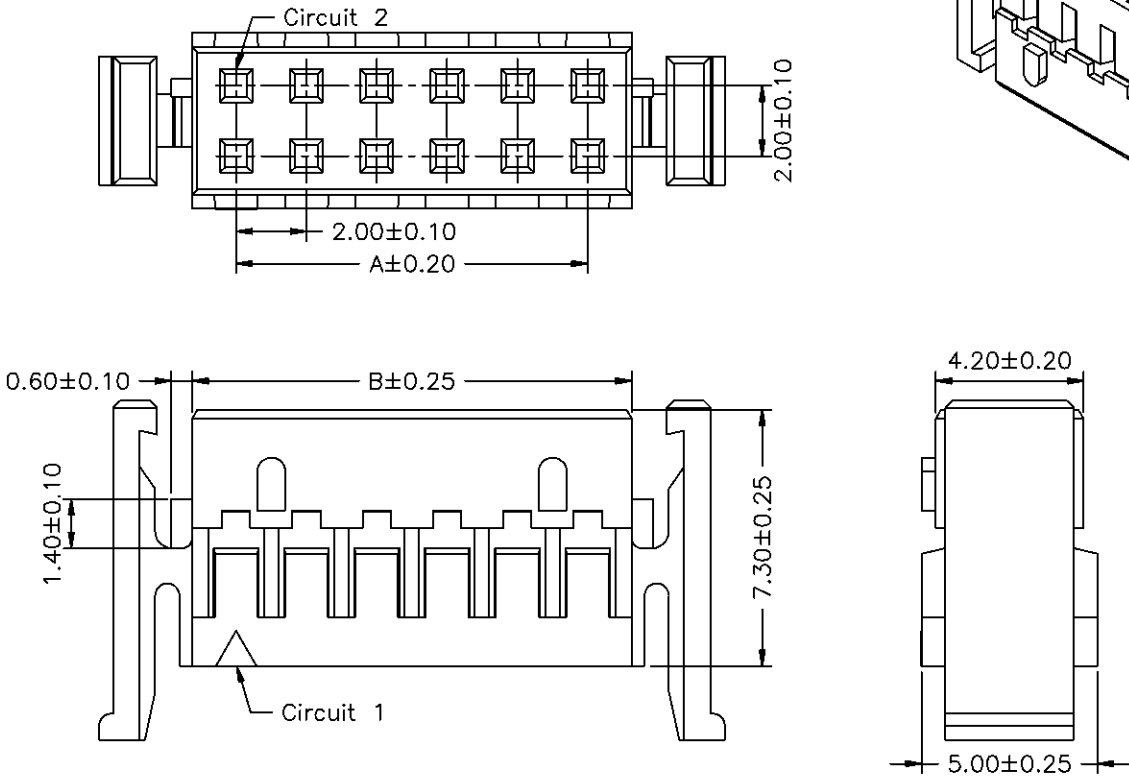

					PART NO.		H2004A-2XX		DATA		2007/11/30		
					DRAWING NO.		H2004A-2XX			DRAWN		Sayid	
					CUSTOMER P/N					APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: Pitch 2.00mm Housing		REV. A	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT		mm	

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute





Terminal: Brass / Gold Plated

Material: Nylon 6T, UL94V-0

ORDER INFORMATION

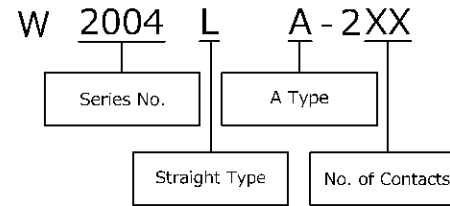

RoHS

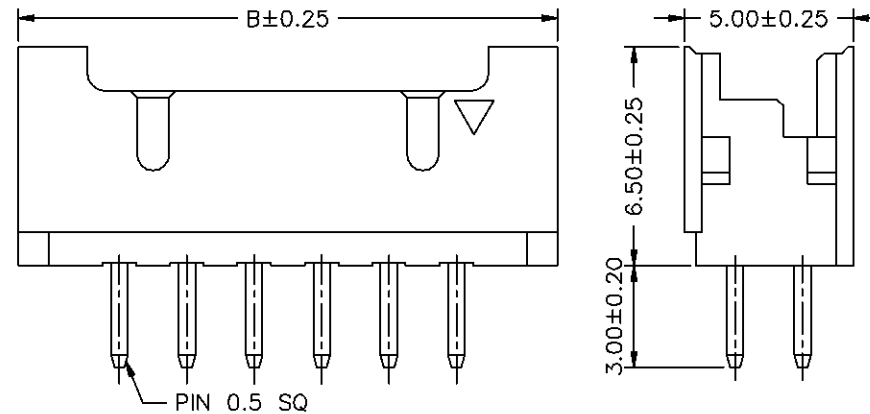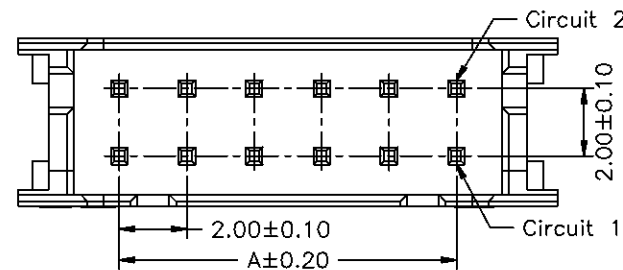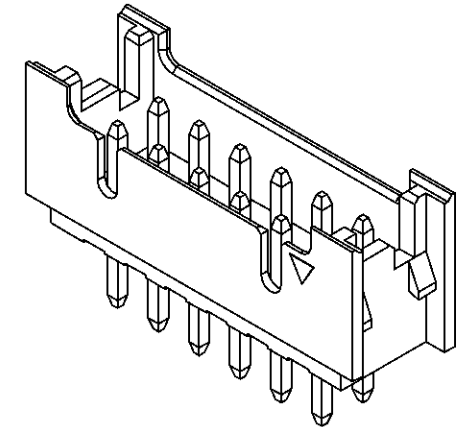

P.C.B. LAYOUT


No. of Contacts	Dimensions	
	A	B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00
17	32.00	38.00
18	34.00	40.00
19	36.00	42.00
20	38.00	44.00

			TITLE: Pitch 2.00mm Wafer Straight Type	REV. A	PART NO.		W2004LA-2XX		DATA		2007/11/30
					DRAWING NO.		W2004LA-2XX		DRAWN		Sayid
					CUSTOMER P/N				APPROVED		Max
REV.	DESCRIPTION	DATA			TOLERANCE	.X ± 0.25 .XX ± 0.20	SCALE	FREE	UNIT	mm	


Specifications

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Terminal: Brass / Gold Plated
Material: Nylon 6T, UL94V-0




ORDER INFORMATION

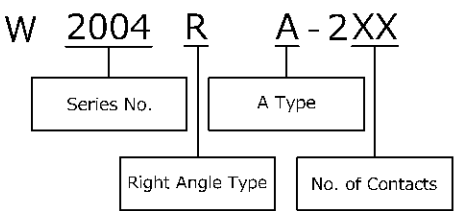

No. of Contacts	Dimensions	
	A	B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00
17	32.00	38.00
18	34.00	40.00
19	36.00	42.00
20	38.00	44.00



P.C.B LAYOUT

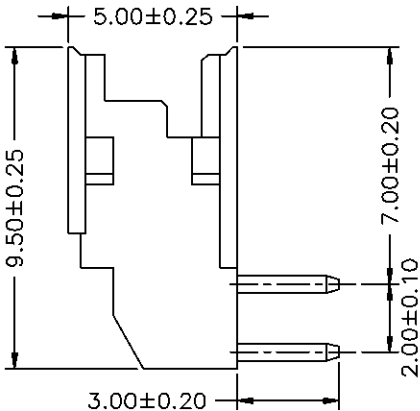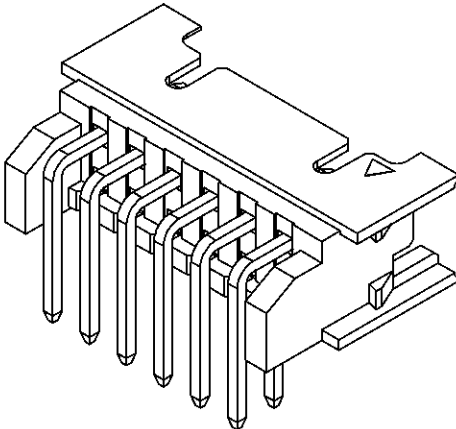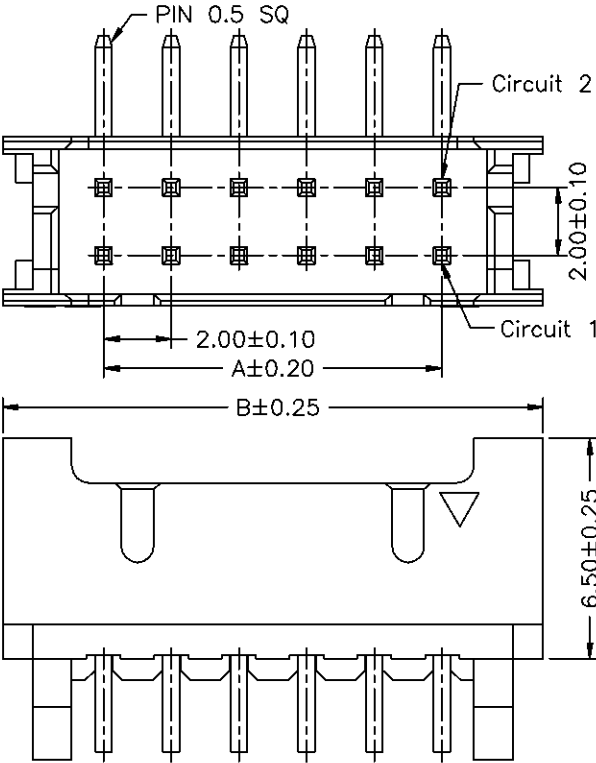

			TITLE: Pitch 2.00mm Wafer Right Angle Type	REV. A	PART NO.		W2004RA-2XX		DATA	2007/11/30
					DRAWING NO.		W2004RA-2XX		DRAWN	Sayid
					CUSTOMER P/N				APPROVED	Max
REV.	DESCRIPTION	DATA			TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm