



ACTUAL SIZE



MTG LAYOUT

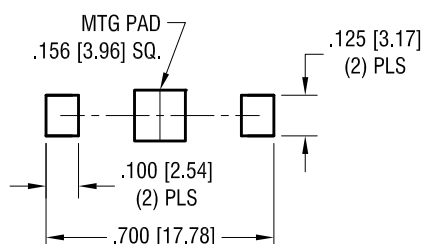

POLARITY STAMP

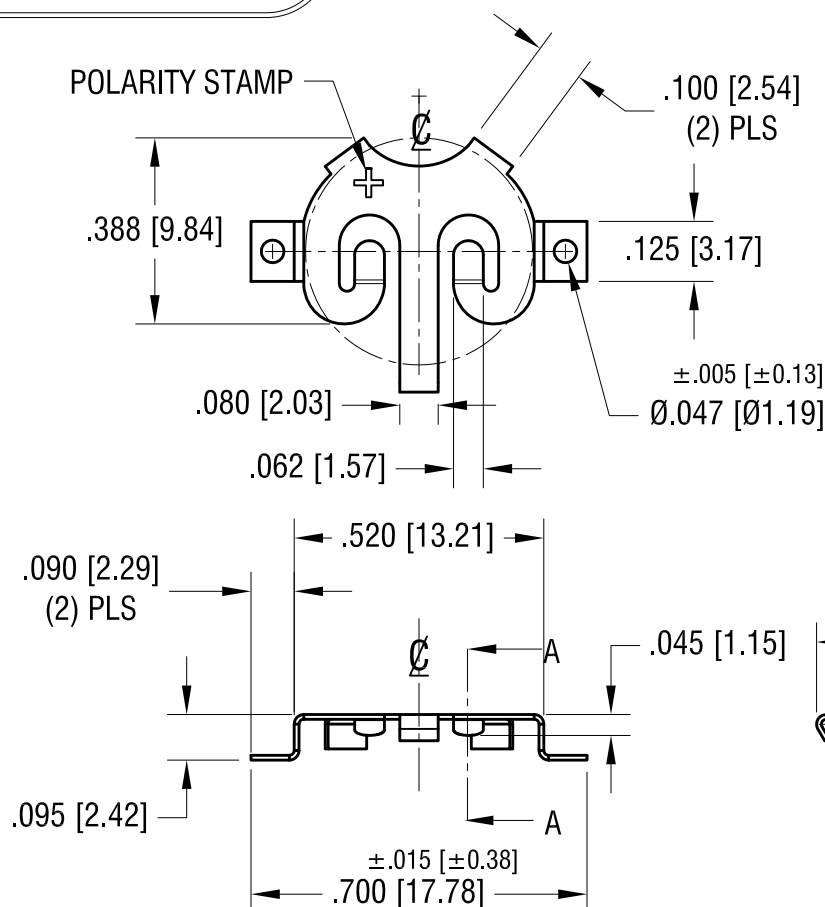

SECTION A-A

NOTE:

1. NO DISLODGMET OF THE CELL OR DAMAGE TO RETAINER WITH THE FOLLOWING TESTS:

- INTEGRITY VIBRATION TEST PER MIL-STD-810G METHOD 516.6
- SHOCK TEST PET MIL-STD-810G METHOD 516.6
- BENCH HANDLING SHOCK TEST PER MIL-STD 810G METHOD 516.6
- TRANSIT DROP TEST PER MIL-STD 810G METHOD 516.6

3.30.20	ADDED NOTE 1. CHANGE AS PER ECN 20-031	B
5.13.19	REMOVE DIMPLES CHANGE AS PER ECN 19-052	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
CR1220 COIN CELL SM RETAINER			
MATERIAL			
.010 [0.25] TH'K PHOSPHOR BRONZE			
FINISH		DRN BY	DATE
TIN NICKEL PLATE		NT	9.19.18
TOLERANCES		APP'D	SCALE
INCH [MM]		LN	2.5X
DECIMAL		DWG NO.	
ANGULAR ± 1°		2894	
UNLESS OTHERWISE SPECIFIED		C	