
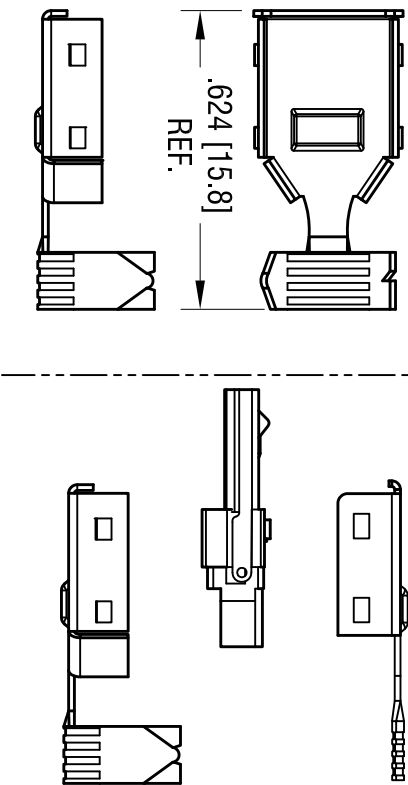

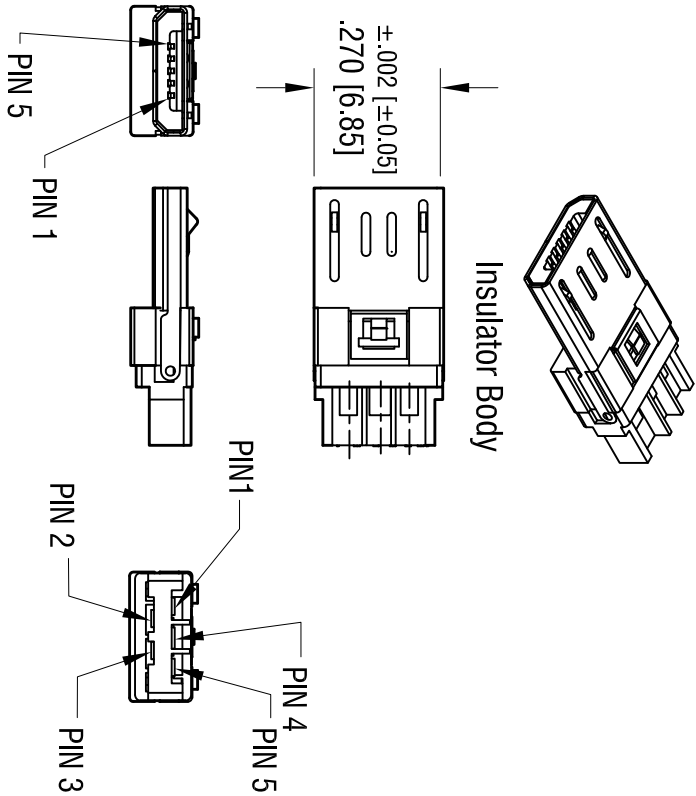


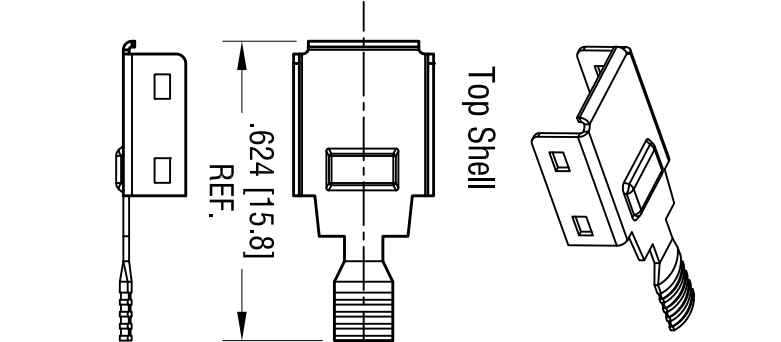

DATE	DESCRIPTION	REV.
2.25.10	CHANGE AS PER ECN 10-017	A
6.01.11	CHANGE AS PER ECN 11-077	B
11.05.12	CHANGE AS PER ECN 12-155	C
2.20.13	CHANGE AS PER ECN 13-019 ADD PIN NUMERATION	D
10.31.19	CHANGE AS PER ECN 19-082	E
2.25.25	CHANGE AS PER PCN 25-009. ADDED PACKAGING DETAILS.	F

Supplied Unassembled

Notes:

Materiall:

Shell: Steel, Nickel Plate.

Insulator: PBT, UL 94-V0 (Color Black)

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate

on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

Rated Voltage: 30V AC (rms)


Contact Current Rating: 1.5 Amp

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 100V AC

Operating Temperature: -30°C to 85°C

Packaging Details: 100 Pieces Per Bag.



ACTUAL SIZE

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.			
TOLERANCES	INCH	[MM]	CODE
DECIMAL	± .010	[± 0.25]	C
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			

KEYSTONE ELECTRONICS CORP.			
www.keystoneelectronics.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
MICRO USB PLUG			
MATERIAL			
AS NOTED			
FINISH			
AS NOTED			
TOLERANCES		DRN BY	DATE
AS NOTED		NT	10.31.19
APPD		RH	SCALE
			2.5X
		DWG NO.	
		941	