
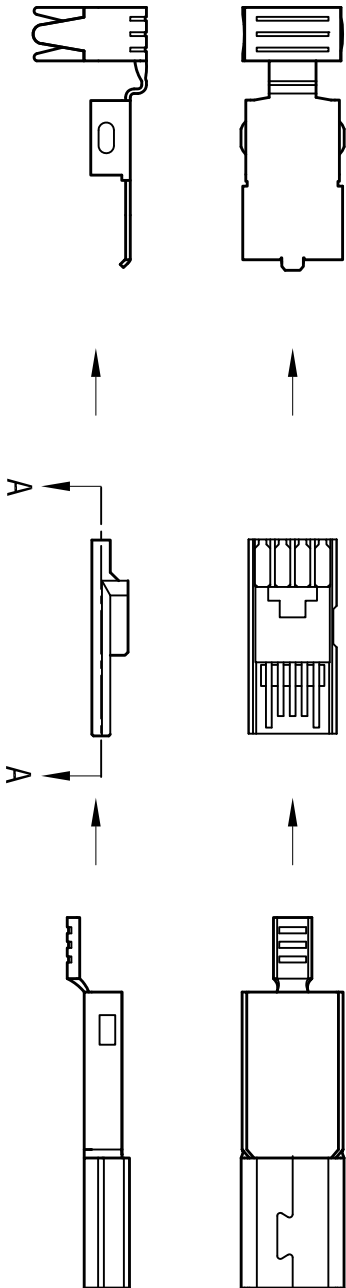


DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-072	A
7.28.20	CHANGE AS PER ECN 20-069 UPDATE REAR SHELL	B
2.25.25	CHANGE AS PER PCN 25-008. ADDED PACKAGING DETAILS.	C

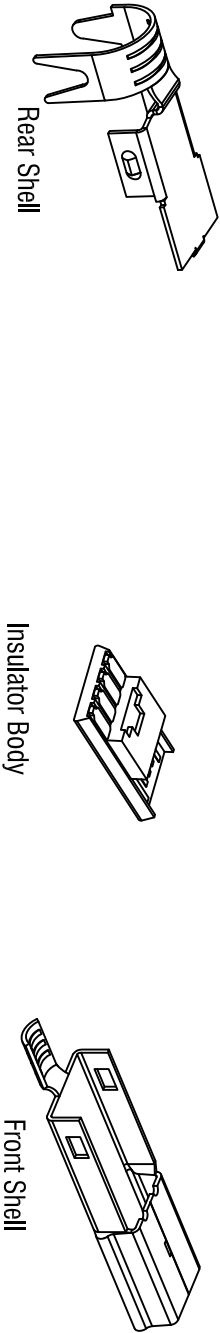

NOTE:

SHELL: MAT'L- STEEL

FINISH: TIN OVER NICKEL PLATING

INSULATION: THERMOPLASTIC, UL 94V-0

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH: GOLD PLATE ON CONTACT AREA

TIN OVER NICKEL ON SOLDER TAILS

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30m Ω max.

INSULATION RESISTANCE: 1000 MEGA Ω min.

DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC

PACKAGING DETAILS: 100 PIECES PER BAG.

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.			
TOLERANCES	INCH	[MM]	CODE
DECIMAL	$\pm .015$	[± 0.38]	C
ANGULAR	$\pm 1^{\circ}$		
UNLESS OTHERWISE SPECIFIED			

KEYSTONE ELECTRONICS CORP.

www.keyleco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB MINI PLUG

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY	DATE
BOONE	7.28.20

APPD	SCALE
RH	2X

935