
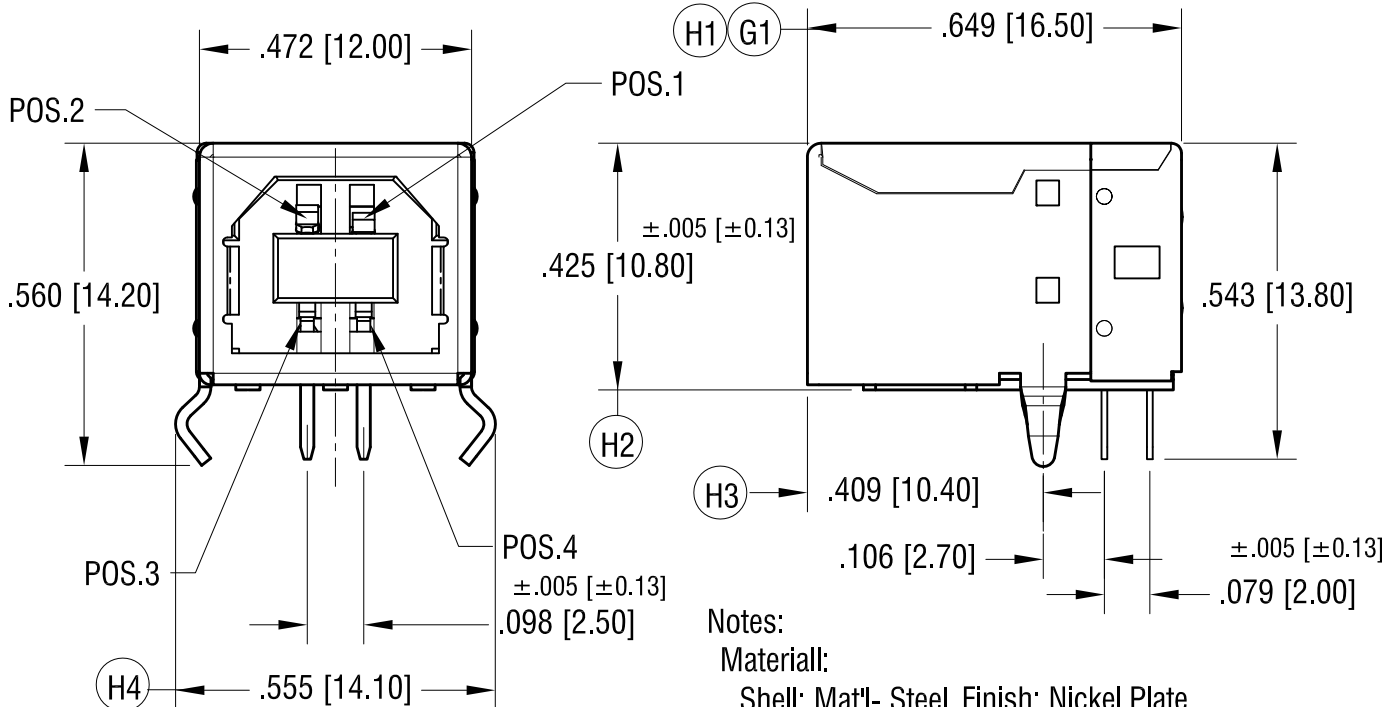
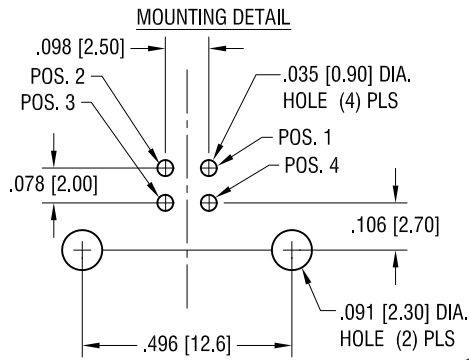


ACTUAL SIZE



Notes:

Material:

Shell: Mat'l- Steel, Finish: Nickel Plate

Insulator: PBT

Contacts: Phosphor Bronze

Finish: Contact Area: Gold Plate over Nickel Plate
on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

Rated Voltage: 30V AC (rms)

Contact Current Rating: 1 A Max.

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 750V AC

Operating Temperature: -55°C to 85°C

12.07.22	H4 WAS .575 [14.60] H2 WAS .419[10.65], H3 WAS .406[10.30] ECN 22-175, H1 WAS .638 [16.20]	H
8.02.21	ECN 21-071, G1 WAS .650[16.50]	G
2.01.16	CHANGE AS PER ECN 16-021	F
3.10.11	CHANGE AS PER ECN 11-036	E
12.17.09	CHANGE AS PER ECN 09-190	D
6.8.05	CHANGE AS PER ECN 05-034	C
10.21.02	CHANGE AS PER ECN 02-069	B
8.17.99	CHANGE AS PER ECN 99-059	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB B-TYPE HORIZONTAL SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

6.18.98

APP'D

RH

SCALE

3X

TOLERANCES

INCH [MM]

DECIMAL

±.010 [±0.25]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

924