

DATE	DESCRIPTION	REV.
8.11.99	CHANGE AS PER ECN 99-056	A
6.8.05	CHANGE AS PER ECN 05-032	B
9.22.08	CHANGE AS PER ECN 08-162	C
12.15.09	CHANGE AS PER ECN 09-186	D
1.13.12	CHANGE AS PER ECN 12-006	E

NOTE:




- 1. SHELL: MAT'L- PHOSPHOR BRONZE
FINISH- TIN PLATE, OVER NICKEL PLATE
- 2. INSULATOR: MAT'L- GLASS FILLED LCP
- 3. CONTACTS: MAT'L- PHOSPHOR BRONZE
FINISH- CONTACT AREAS-
GOLD PLATE, OVER NICKEL

- SOLDER TAIL- TIN PLATE, OVER NICKEL PLATE
- 4. ELECTRICAL SPECIFICATIONS:
CONTACT RESISTANCE: 30 milliohms MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
INSULATION RESISTANCE: 100 Mohms MIN.
OPERATING TEMPERATURE: -25°C TO 85°C
DURABILITY MIN.: 1500 cycles
- 5. SUPPLIED ON TRAY: 100 PCS PER TRAY

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME			
USB A-TYPE HORIZONTAL SOCKET			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		BOONE	6.18.98
		APPD	SCALE
		RH	2.5X
TOLERANCES	INCH	MM	CODE
DECIMAL	± .010	[± 0.25]	
ANGULAR	± 1°		C
UNLESS OTHERWISE SPECIFIED			

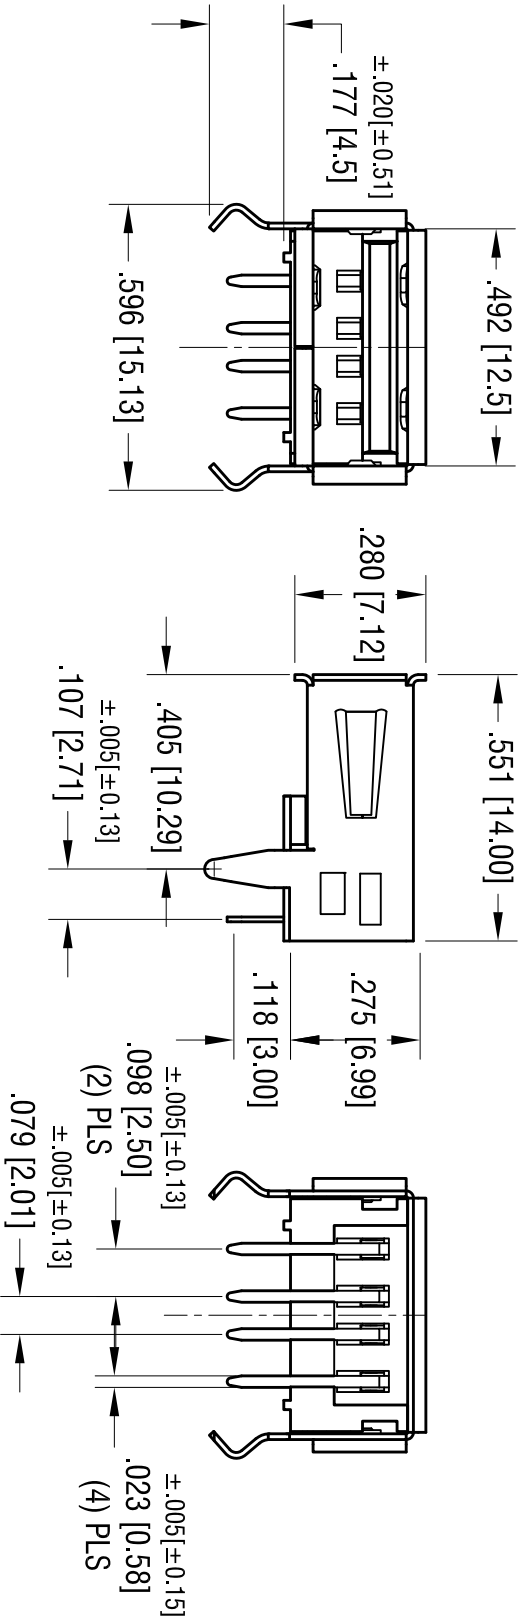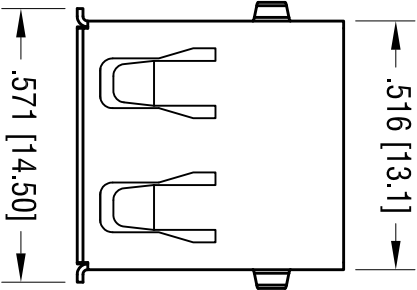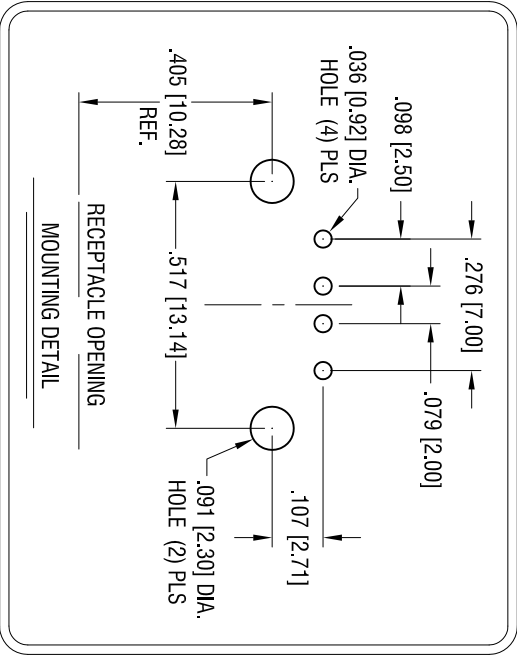

ACTUAL SIZE

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.