
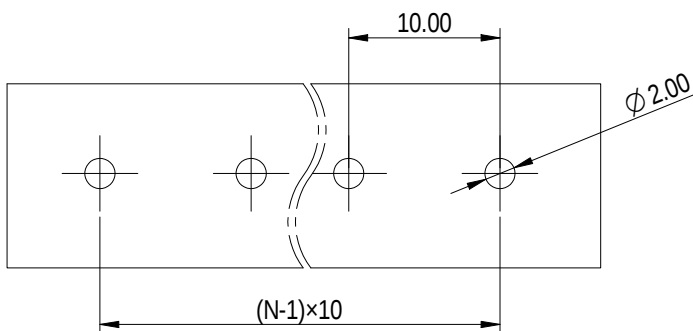
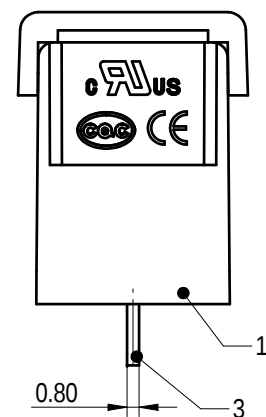
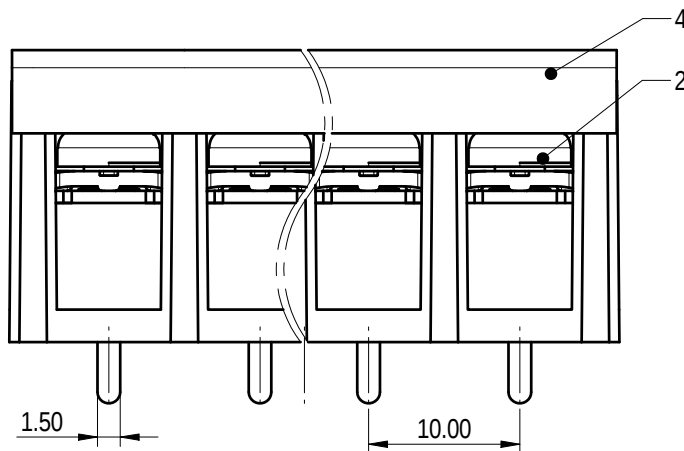
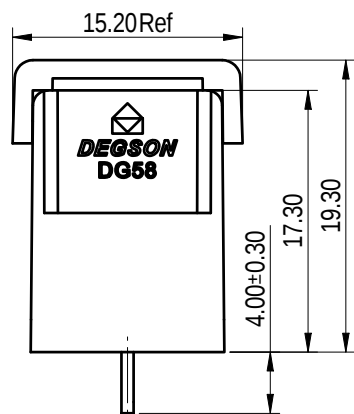


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

(W/O COVER)

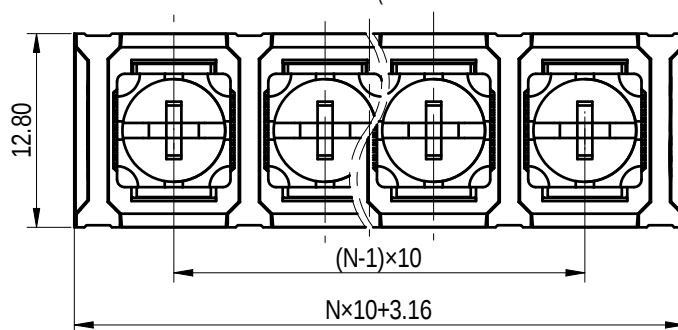

Note: The A&Z(H) in the name means: A(H) and Z(H).

4	Cover	PC	UL94V-2
3	Pin header	Copper alloy	M4/Sn Plated
2	Screw	Steel	M4/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/20	/	300/10
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		22~12		
间距/Pitch(mm)/线数范围/Poles		10.00/N=02~22P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL:		SURFACE/COLOR:	
APPD: 蓝贵凡		MAT NO./REV:		MAT STATUS: 批量	
CHKD: 曹利彬		NAME		DG58C-B-XXP-1Y-00A&Z(H)	
DRFT: 孙科豪		DRAWING NO.		DRAWING STATUS	
2022.12.05		200120467		已发布	
TYPE		CUSTOMER DRAWING		SCALE	
A4		200120467		2:1	
(inch)				SHEET	
				1/1	

00					
REV	ECN	DESCRIPTION	DRFT	DATE	