
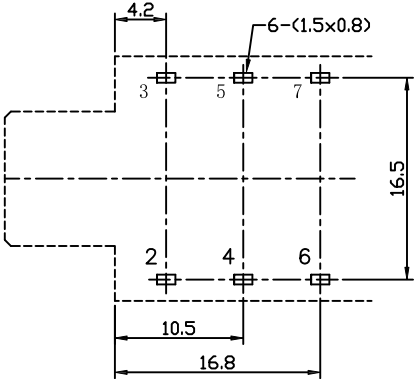



SPECIFICATIONS:

Rating: 1.0A/30V DC Max.
Contact Resistance: 30m Ω Max.
Insulation Resistance: 100M Ω Min.
Withstanding Voltage: 500 VAC for 1min.
Insertion and extraction force: 5-30N
Durability: 5,000 cycles

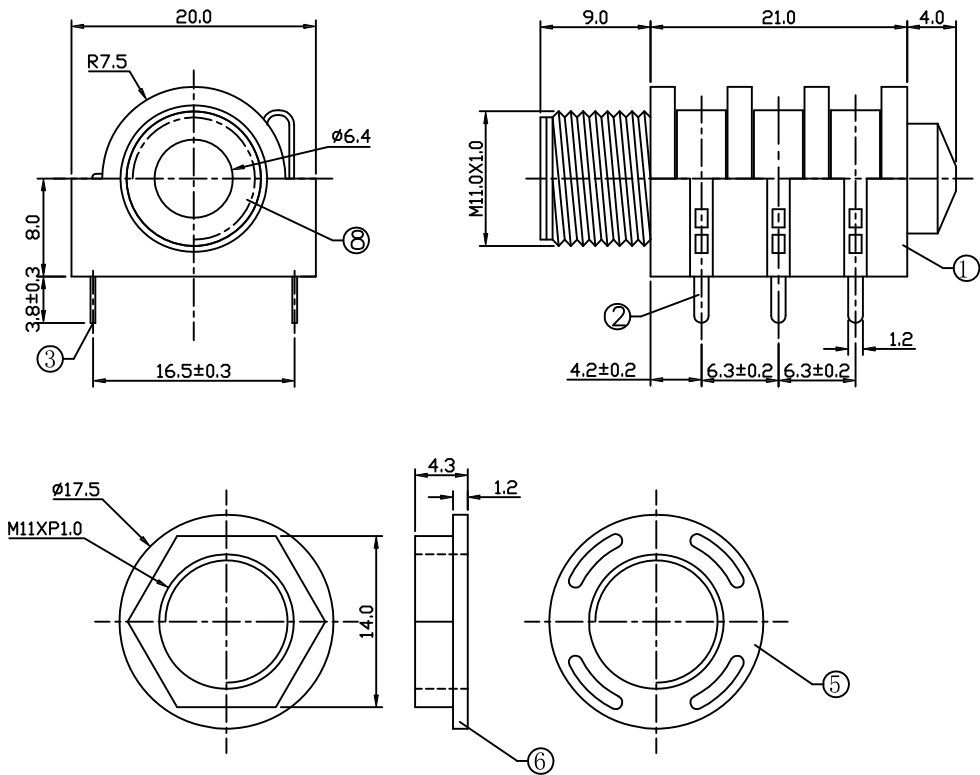

P.C.B. LAYOUT
TOP VIEW

SCHEMATIC

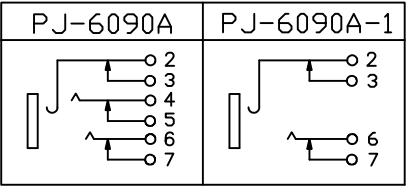

6	Nut	1	ABS	Black
5	washer	1	ABS	Black
4	Bushing	1	H59 BRASS	Ni(Au)-Plating
3	CONTACT FOOT	3	BRASS	Ag-Plating
2	SPRING	3	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PBT/ABS	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

			PART NO.		PJ-6090A		DRAWN		Andrew	
			DRAWING NO.		PJ-6090A		CHECKED		Claudia	
			DATE		2024/04/15		APPROVED		Brian	
TITLE: PHONE JACK			REV. A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	