
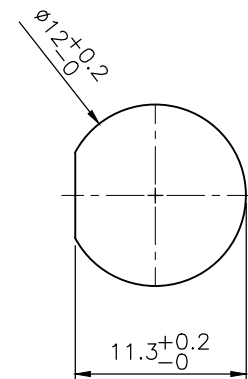
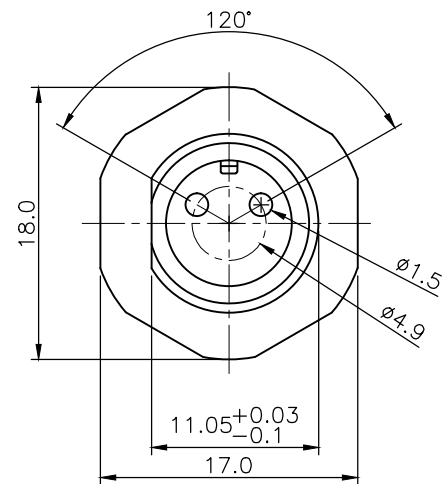







REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/06/21
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

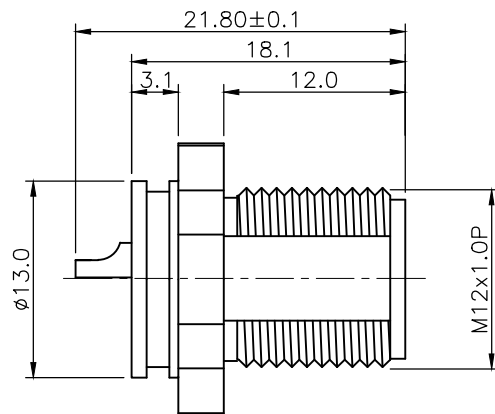

PANEL CUT-OUT

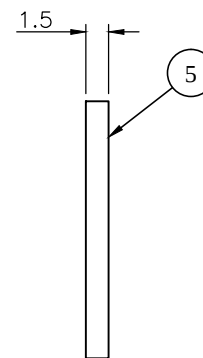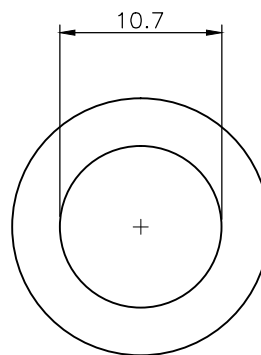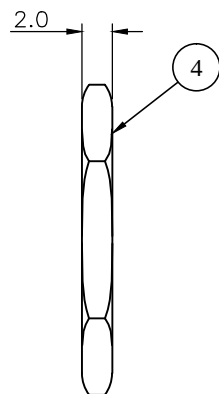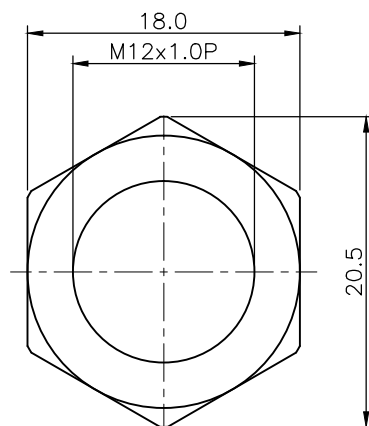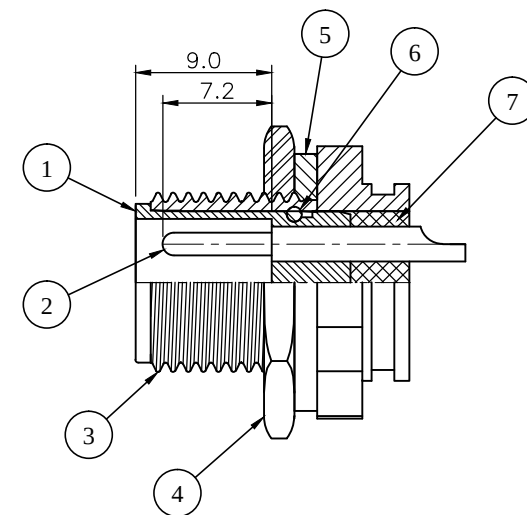


7	EPOXY BASE	EF400A&EF400B, Black
6	O-RING A	SILICONE, Brown
5	O-RING B	EPDM, Black
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND			
UNIT:	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
m m				WWW.ATTEND.COM.TW			
DRAWN		Fros		2016/06/21		DRAWN NAME:	
CHECKED		Ron		2016/06/21		M12 A-Code Receptacle, 2Pin Male Solder Type Front Fastened	
APPROVED		Ken		2016/06/21		PRODUCT NO. 216A-02MAF	
		SCALE 2/1		SHEET 1/1		SIZE A4	
				FILE NAME		216A-02MAF_B_2	




WWW.ATTEND.COM.TW


1. Wire Processing

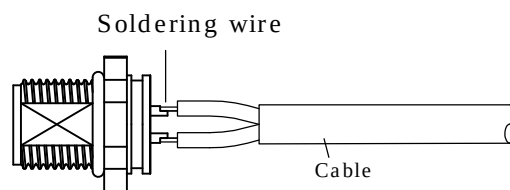

2. Installation Direction

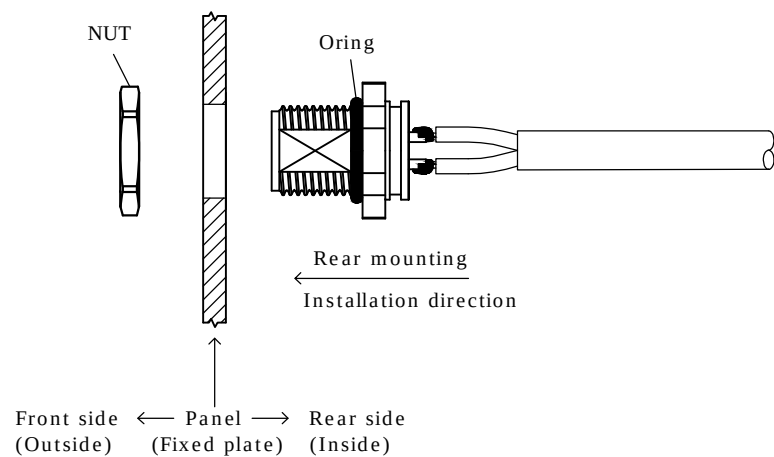

3. Connector Mated to Panel Mount

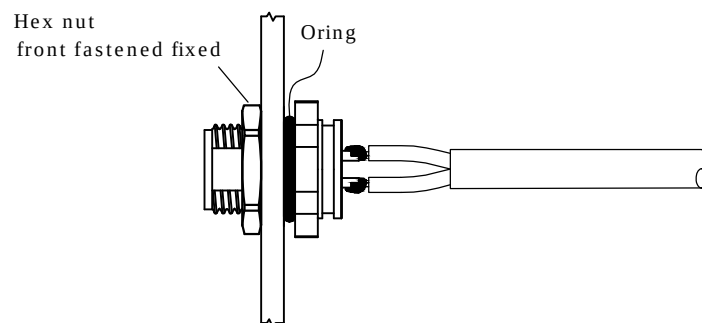

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Male Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MAF_DG