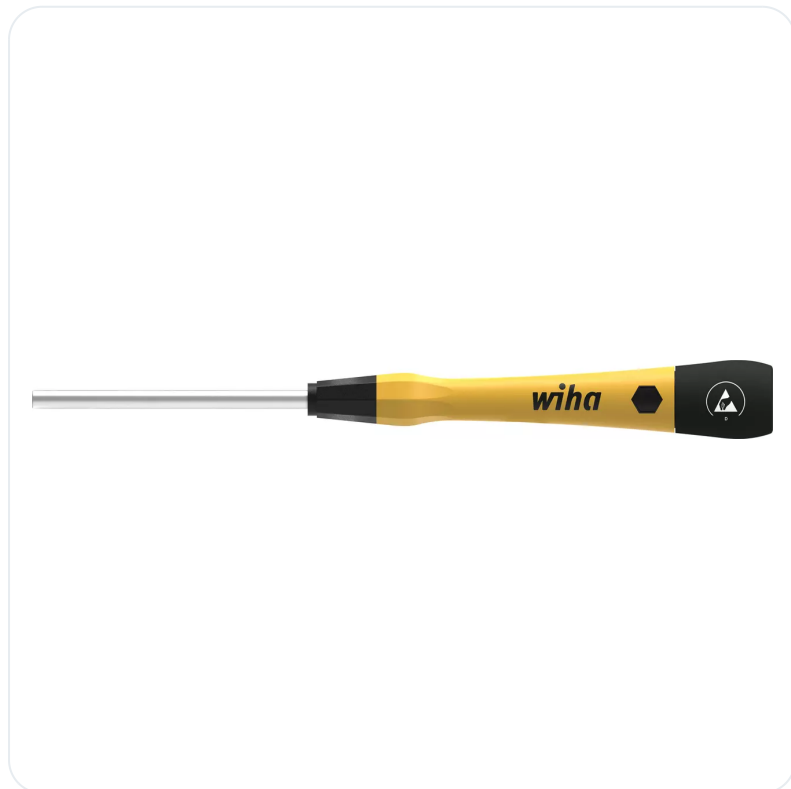












# Fine screwdriver PicoFinish® ESD

Hex nut driver



Order number	EAN			 mm		 g	Netto
43689	4010995436896	4.0 mm	60 mm	160 mm	18 mm	25	24.5
43690	4010995436902	5.0 mm	60 mm	160 mm	18 mm	26	24.89
43691	4010995436919	5.5 mm	60 mm	160 mm	18 mm	26	25.54

-  Hexagon head (mm)
-  Visible blade length (mm)
-  Overall length (mm)
-  Handle diameter (mm)
-  Weight PU in grams

Series **275P**

Size specifications are always given in mm

## Product Description

The challenge when working on electronic components is that they can become damaged even at the lowest voltages. The electrostatically conductive fine screwdriver PicoFinish® ESD masters such tasks effortlessly. Thanks to their long, slim handles and quick-turning zone, these fine screwdrivers are ideal for careful, precise work practices on delicate workpieces. Their ergonomic handle design with soft zone makes them comfortable to use. The smooth-running rotating cap allows users to turn the screwdriver quickly and sensitively. The printed screwdriver symbols on the rotating cap make it easier to select the right screwdriver profile. The dissipative tool safely channels electrostatic energy away in a controlled fashion. The ESD fine screwdrivers are manufactured in compliance with international IEC standard 61340-5-1, thus guaranteeing maximum protection for electronic components. These screwdrivers have a surface resistance between  $10^6$  -  $10^9$  ohm.

### Product dimensions

162 x 17 x 17 mm (LxWxD)

### Application

Ideal for fine and delicate fastening tasks on components at risk of electrostatic discharge.