






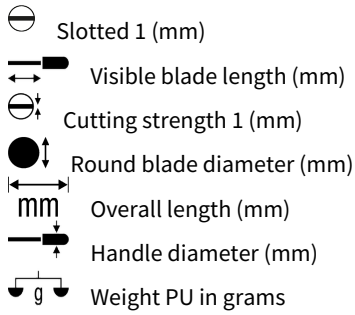


Fine screwdriver PicoFinish® ESD

Slotted



Order number	EAN					 mm		 g	Netto
43669	4010995436698	1.5 mm	40 mm	0,23 mm	2 mm	134 mm	9 mm	11	13.56
43670	4010995436704	2.0 mm	40 mm	0,40 mm	2 mm	140 mm	18 mm	14	13.59
43671	4010995436711	2.5 mm	50 mm	0,40 mm	2.5 mm	150 mm	18 mm	16	13.67
43672	4010995436728	3.0 mm	50 mm	0,50 mm	3 mm	150 mm	18 mm	18	13.73



Series **270P**

Size specifications are always given in mm

Product Description

The challenge when working on electronic components is that they can become damaged even at the lowest voltages. The electrostatically conductive fine screwdriver PicoFinish® ESD masters such tasks effortlessly. Thanks to their long, slim handles and quick-turning zone, these fine screwdrivers are ideal for careful, precise work practices on delicate workpieces. Their ergonomic handle design with soft zone makes them comfortable to use. The smooth-running rotating cap allows users to turn the screwdriver quickly and sensitively. The printed screwdriver symbols on the rotating cap make it easier to select the right screwdriver profile. The dissipative tool safely channels electrostatic energy away in a controlled fashion. The ESD fine screwdrivers are manufactured in compliance with international IEC standard 61340-5-1, thus guaranteeing maximum protection for electronic components. These screwdrivers have a surface resistance between 10^6 - 10^9 ohm.

Product dimensions

135 x 17 x 17 mm (LxWxD)

Application

Ideal for fine and delicate fastening tasks on components at risk of electrostatic discharge.