


Support Post (Metric)

Spacer Bolts DIA



[Steel, self-tapping thread]

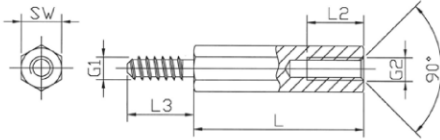

Spacer bolts

Type hexagonal
Styles internal / external
 with undercut
 (optional without undercut)
Material Steel 1.0718 / DMS 200
Surface zinc plated (A3F)
Standard Pack from 100 pcs

External thread G1 [mm]

Thread size	I3	d1	d2
ST2,2	5	2,1	1,6
ST2,9	6	2,8	2,1
ST3,3	6	3,2	2,3
ST3,5	7	3,4	2,6
ST4,2	8	4,1	3,0
ST4,8	8	4,7	3,5
ST6,3	10	6,1	4,8

Internal thread G2 [mm]

L (mm)	I2 (mm)
8	5
10	6
12	7
15	10
20	10



Tolerance for length dimensions: +/- 0,1 mm

Standard lengths [mm]

Order No.	SW (mm)	Thread size G1	Thread size G2	08	10	12	15	20
222ST2,2 x (length)	5	ST2,2	M2,5	08	10	12	15	20
224ST2,9 x	5,5	ST2,9	M3	08	10	12	15	20
224ST3,3 x	5,5	ST3,3	M3	08	10	12	15	20
225ST3,5 x	6	ST3,5	M3	08	10	12	15	20
226ST4,2 x	7	ST4,2	M4	08	10	12	15	20
228ST4,8 x	8	ST4,8	M5	08	10	12	15	20
229ST6,3 x	10	ST6,3	M6	10	12	15	20	

SW: width across flats

Please add the suffix "of" to the article No. to specify the variant without undercut.

Ordering example: 222ST2,2 x 15of = DIA / St / SW 5 / M2,5 - St 2,2 x 15of