




Specifications

Current Rating: 1A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Temperature Range: -40°C ~ +105°C


Material

Insulator: Nylon 6T, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

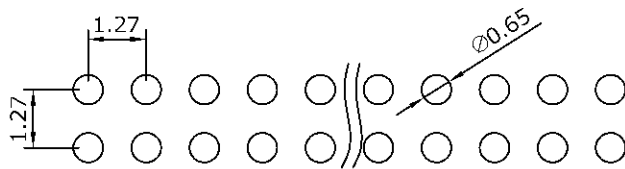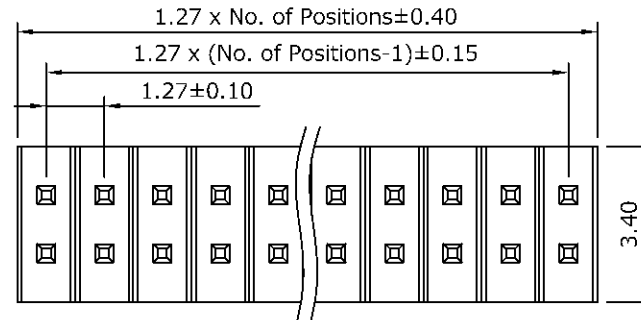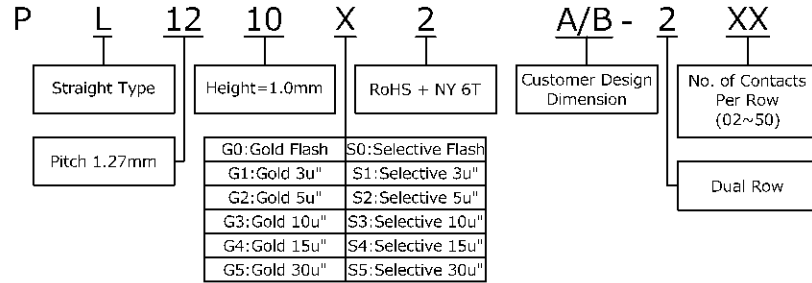

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

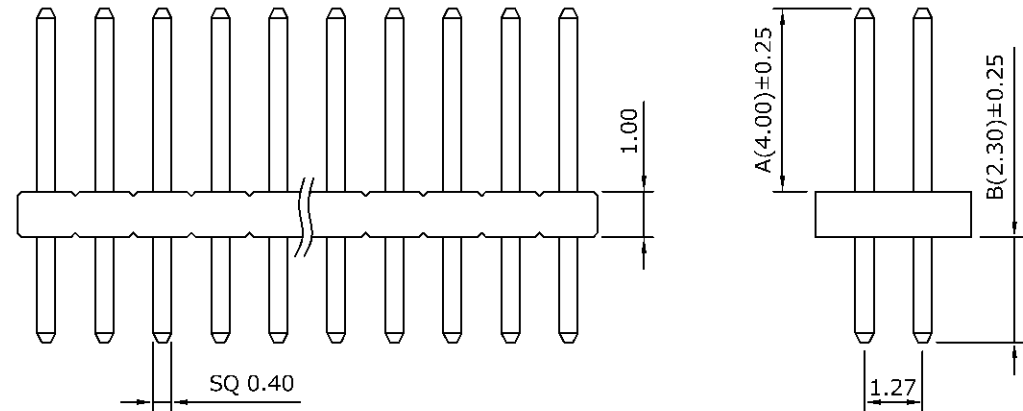

				品號 PART NO.	PL1210X2A/B-2XX	日期 DATA	2007/01/15			
				圖號 DRAWING NO.	PL1210X2A/B-2XX	繪圖 DRAWN				
				客戶品號 CUSTOMER P/N		核對 APPROVED				
REV.	DESCRIPTION	DATA	TITLE: Pin Header 1.27mm Plastic Height 1.0mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm