



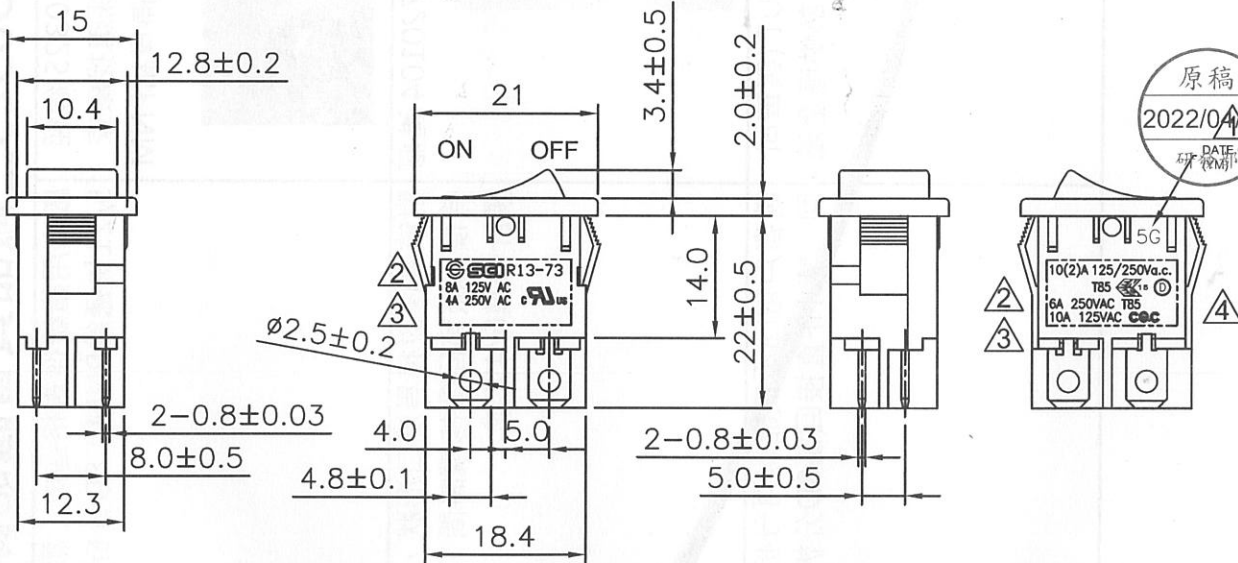




Rating	8A 125V AC 4A 250V AC		Mounting Hole			Circuit Diagram	
	10(2)A 125/250V a.c.			Thickness	ON		
	6A 250VAC, 10A 125VAC						Y
Contact Resistance	50m ohm Max.		Thickness	X	Y		
Insulation Resistance	DC 500V 100M ohm Min.		0.75...1.25	19.2-0.1	13+0.1		
Dielectric Strength	AC 1500V 1 minute		1.25...2.0	19.4-0.1	13+0.1		
Operation Temperature	-20°C~85°C		2.0...3.0	19.8-0.1	13+0.1		
Switch Function	4P DPST ON-OFF						

Material:
 Frame: Black, Nylon 66
 Actuator: Black, Nylon 66
 Printed: White, hot stamping



Tolerances ±0.3 Unless Otherwise Specified

Drawn	Checked	Approved	SCI BOM No.	1822120	Model Name	ROCKER SWITCH	
曾敏捷	符列迎	李进	Customer No.		Model No.	R13-73A-02	REV.
03/31/22	2022/04/22	2022/04/25	Unit	mm	 Shin Chin Industrial Co., Ltd.		4