


[Back](#)

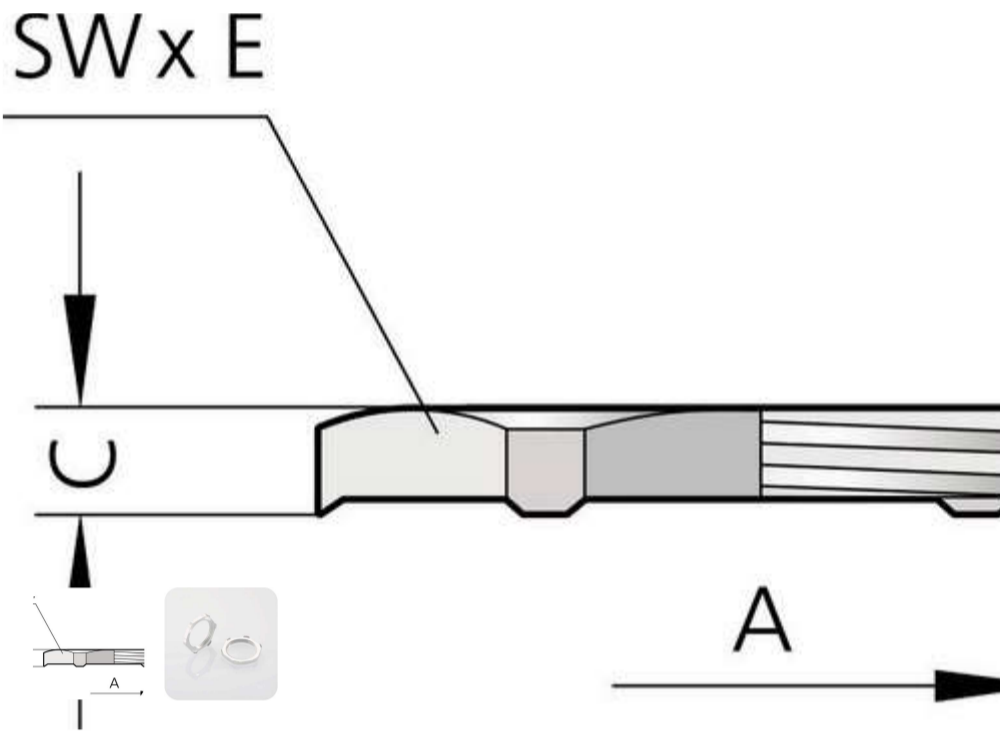

# Lock nut for equipotential bonding – Metric thread – Brass

Brass, nickel-plated  
Metric thread according to EN 60423

RoHS

[Request sample](#)

19600 | TT01600

| Art. No.            | Amount | Connection thread | Mounting height | Spanner width | Conformity |
|---------------------|--------|-------------------|-----------------|---------------|------------|
|                     |        | A                 | C mm            | SW x E mm     |            |
| GMM 210/7 PA        | 1      | M10x1.0           | 3.3             | 15x16.6       | 50 RoHS    |
| GMM 212/7 PA        | 1      | M12x1.5           | 3.3             | 17x18.9       | 50 RoHS    |
| GMM 216/7 PA        | 1      | M16x1.5           | 3.5             | 22x24.4       | 50 RoHS    |
| GMM 220/7 PA        | 1      | M20x1.5           | 3.7             | 24x26.7       | 50 RoHS    |
| <b>GMM 225/7 PA</b> | 1      | M25x1.5           | 4.5             | 30x33.5       | 50 RoHS    |
| GMM 232/7 PA        | 1      | M32x1.5           | 5.0             | 40x43.5       | 50 RoHS    |
| GMM 240/7 PA        | 1      | M40x1.5           | 6.0             | 50x54         | 50 RoHS    |
| GMM 250/7 PA        | 1      | M50x1.5           | 6.2             | 60x65         | 25 RoHS    |
| GMM 263/7 PA        | 1      | M63x1.5           | 6.7             | 68x74         | 10 RoHS    |