

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violation will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、商号、名称、域名、其他知识产权等合法权益外，其他权利均归本公司保留。未经许可，不得复制或传播。

FOR-1755 Rev.1.6

2

3





4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

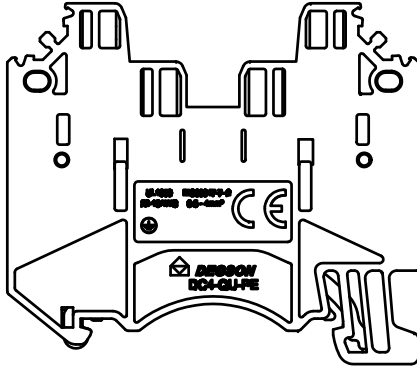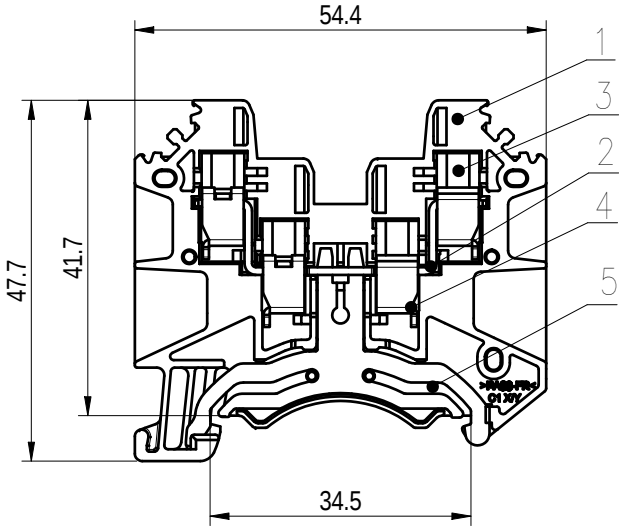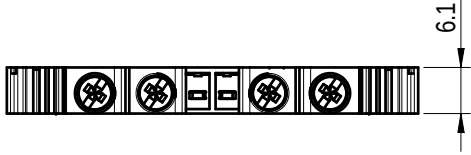

5	Grounding body	Copper alloy	Sn Plated
4	Cage	Steel	Zn Plated
3	Screw	Steel	M3/Zn Plated
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.66/6.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22~10/ 0.5~4		
间距/Pitch(mm)/线数范围/Poles	6.1/01P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL: /	SURFACE/COLOR: /			
		MAT. NO./REV: /	MAT. STATUS: /			
APPD: Peng M	2022.08.20	NAME				
CHKD: Gao WG	2022.08.20	DC4-QU-PE-01P-1Y-00A (H)				
DRFT: Huang RJ	2022.08.20	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		/	CUSTOMER DRAWING	/	2:1	1/1

00	/	/	Huang RJ	2022.08.20
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6