

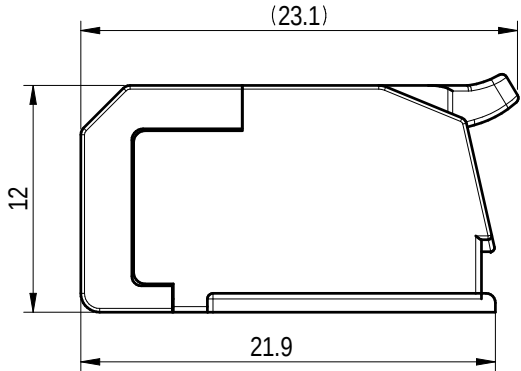
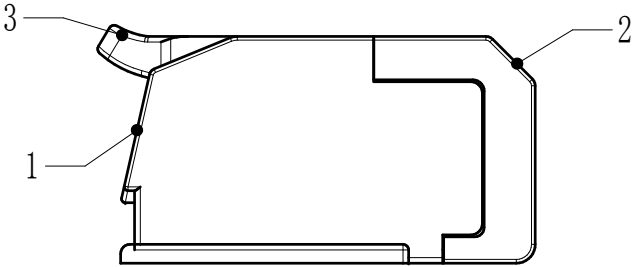
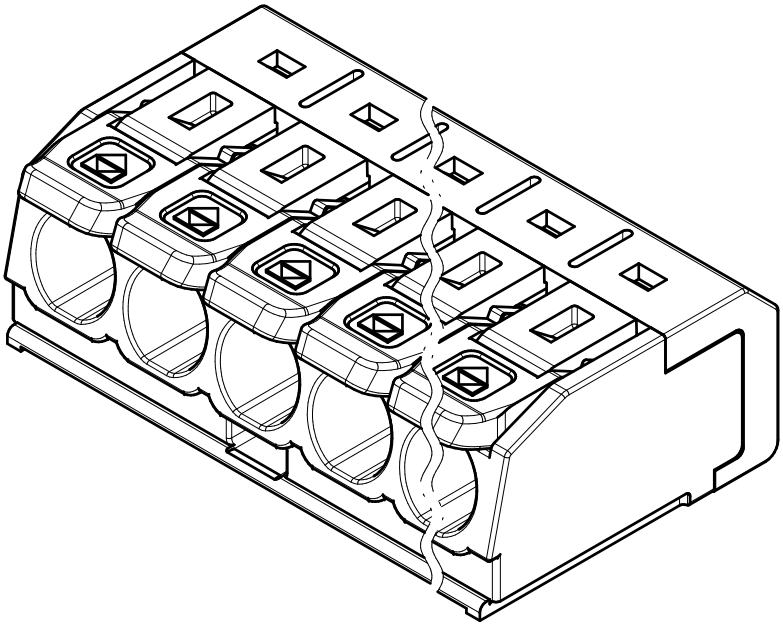
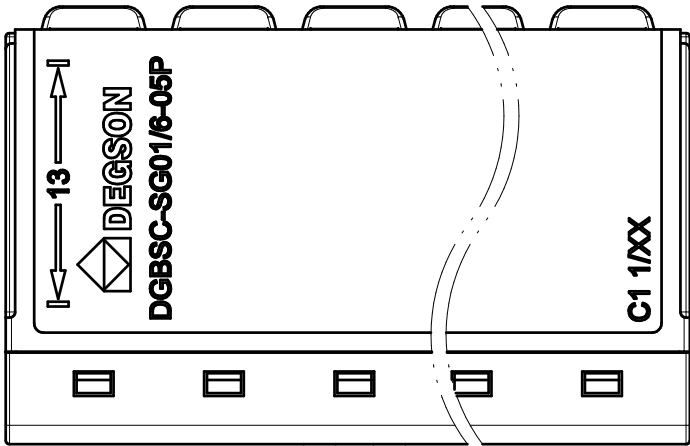
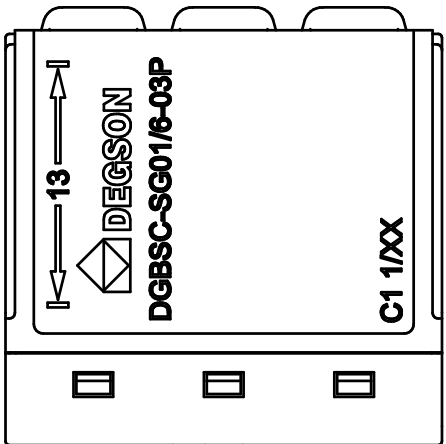
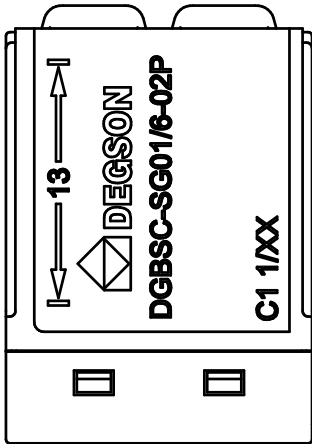
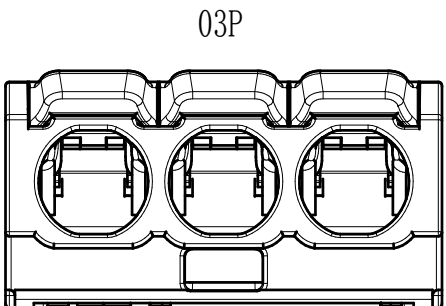


未注公差/General tolerances(mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2°



The test hole at 02P is on the right

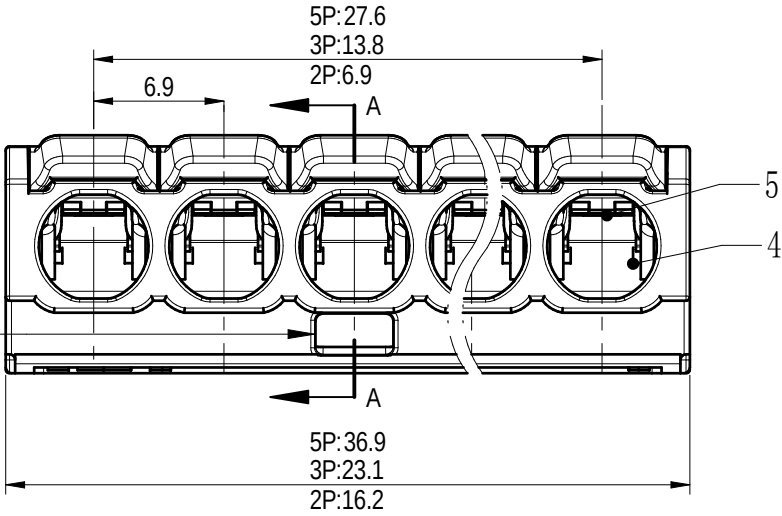

5	Current carrier	Copper	Sn Plated	
4	Spring	Stainless steel	/	
3	Button	PA66+GF	UL94V-0	
2	Cover	PC	UL94V-2	
1	Housing	PC	UL94V-2	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	600/30	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/41	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		20~10/ 0.5~6		
间距/Pitch(mm)/线数范围/Poles		6.9/N=2P、3P、5P		
剥线长度/Stripping length(mm)		12~14		
使用温度范围/Operating temperature(°C)		-40~+85(IEC)		
符合RoHS环保要求/Conform to RoHS		Yes		

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV:		MAT STATUS: 小批量		
APPD: 蓝贵凡			2025-4-2		NAME DGBSC-SG01/6-XXP(1Y-00ZH)		
CHKD: 汪德荣			2025-4-2				
DRFT: 朱伟明			2025-4-2				
DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
200328683		CUSTOMER DRAWING		work		2.5:1	1/1

00			朱伟明	2025-4-2
REV	ECN	DESCRIPTION	DRFT	DATE