
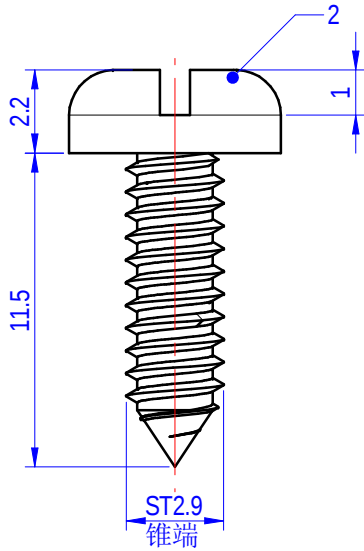
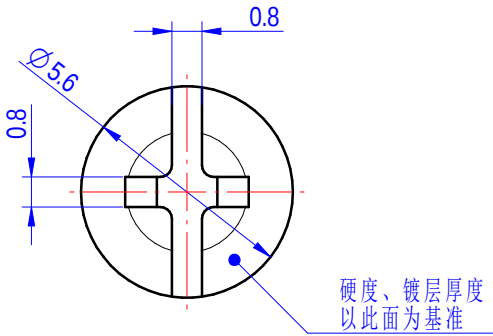


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	±0.12
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±0.18
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

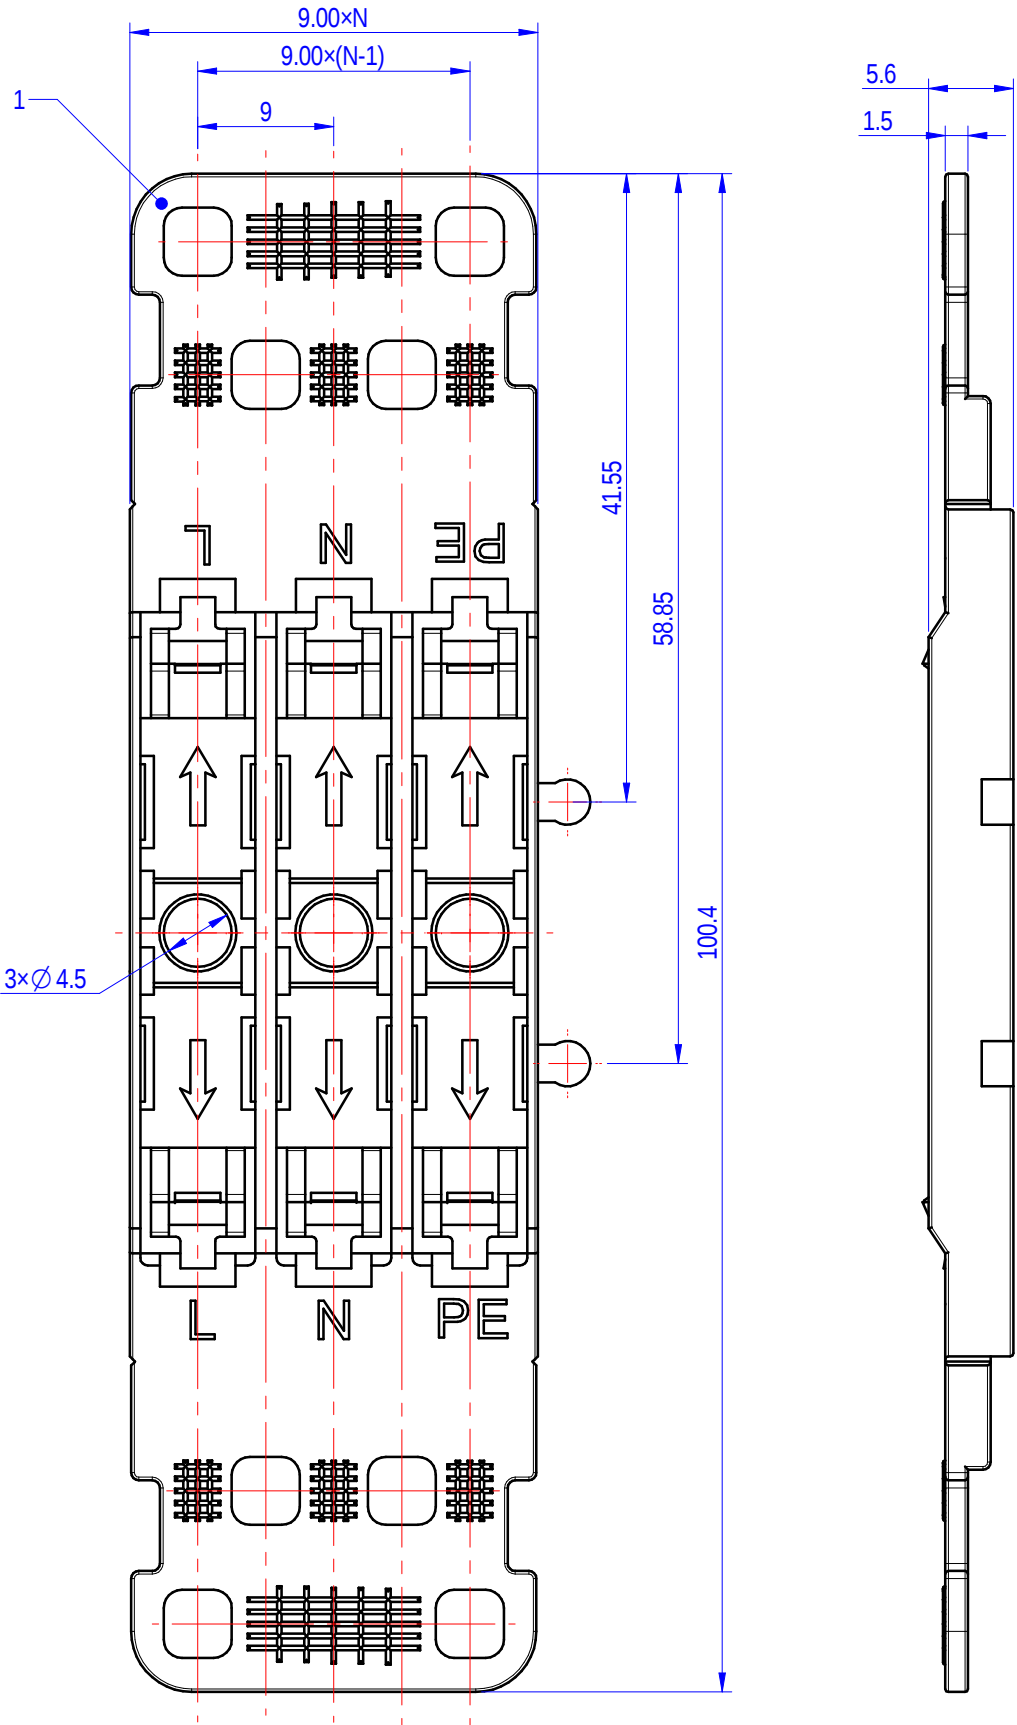

2	Screw	Steel	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			9.00/N=02~03P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:		SURFACE/COLOR:									
		MAT NO./REV:		MAT STATUS: 小批量									
APPD: 蓝贵凡		2024.07.05		NAME									
CHKD: 朱伟明		2024.07.05		DGBSC-ACC03-XXP-1Y-00Z (H)									
DRAFT: 孙科豪		2024.07.05		DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
 A3				200290066		CUSTOMER DRAWING		已发布		1:1		1/1	

00	REV	ECN	DESCRIPTION	DRAFT	DATE