

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、名称权、专利权、著作权等权利外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.1.7

2






3

4


5

6

PCB LAYOUT

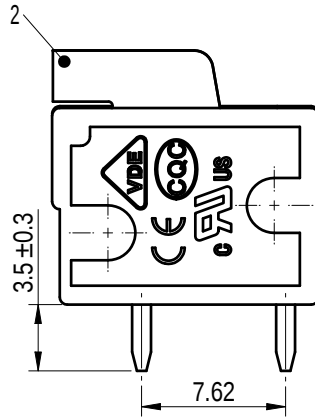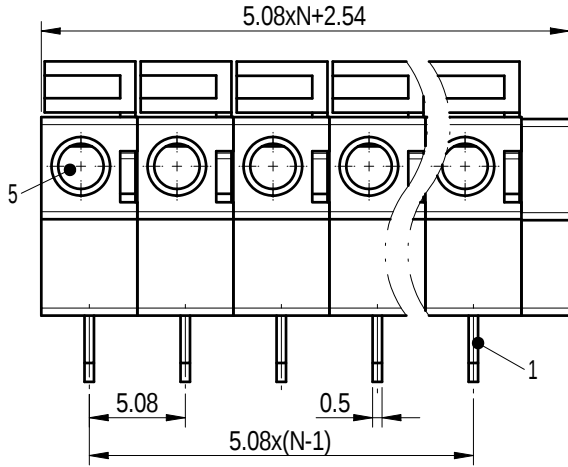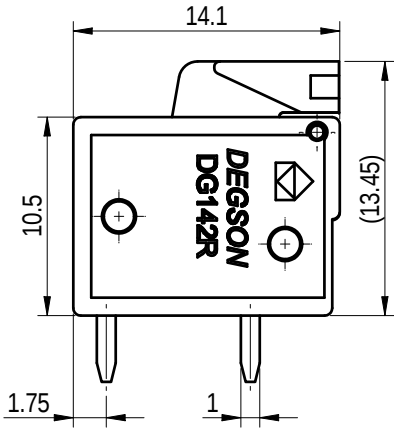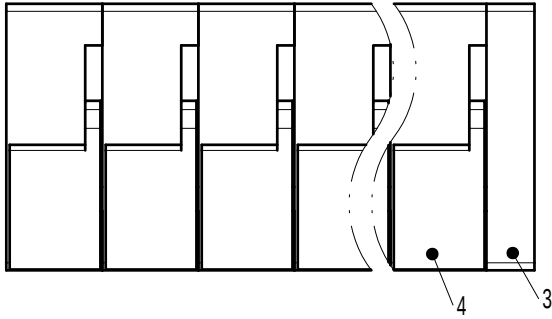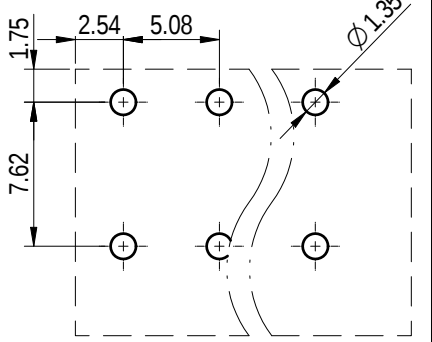

未注公差/General tolerances(mm)														0.1/10 ±2°
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

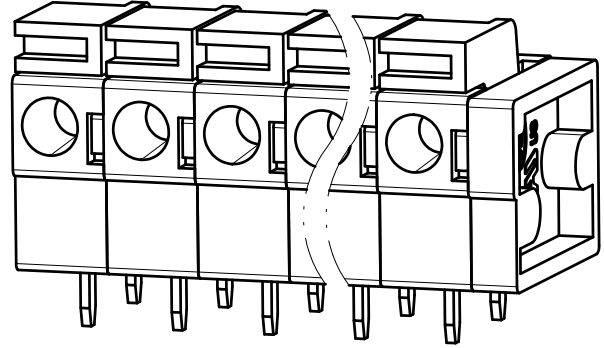

Note:The A&Z(H) in the name means:A(H) and Z(H).

5	Spring	Stainless Steel	/
4	Housing	PA66	UL94V-0
3	Cover	PA66	UL94V-0
2	Button	PA66	UL94V-0
1	Pin header	Copper alloy	Sn plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	300/10	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/15	/
工频耐压/Withstanding Voltage(V/Min)		AC2000		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		22~16 / 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P		
剥线长度/Stripping length(mm)		10		
使用温度范围/Operating temperature(°C)		-40~-+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL: -		SURFACE/COLOR:			
APPD: 兰春华		MAT NO./REV: - / 00		MAT STATUS: 批量			
CHKD: 陈招		NAME					
DRFT: 袁路易		DG142R-5.08-XXP-1Y-00A&Z(H)					
DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
200022101		CUSTOMER DRAWING		已发布		2.5:1	1/1
 A4							

00	ECN	DESCRIPTION	袁路易	2022.08.31
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6