

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、发明、外观设计等知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。本公司保留所有权利。侵权必究。

FOR-1755 Rev.1.7

2

3






4

5

6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

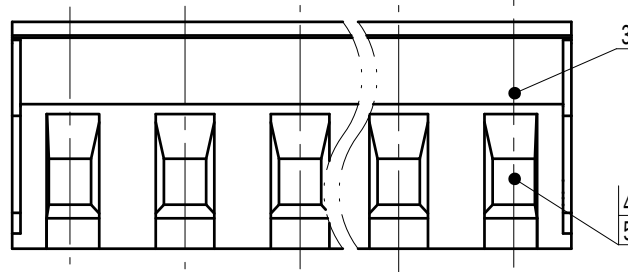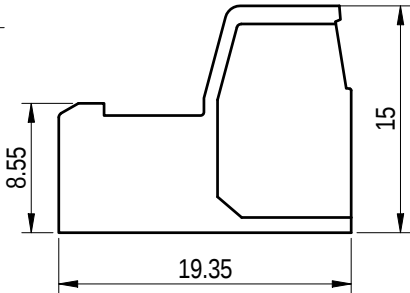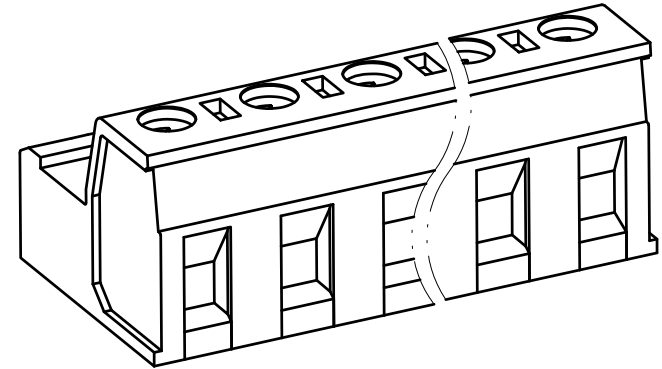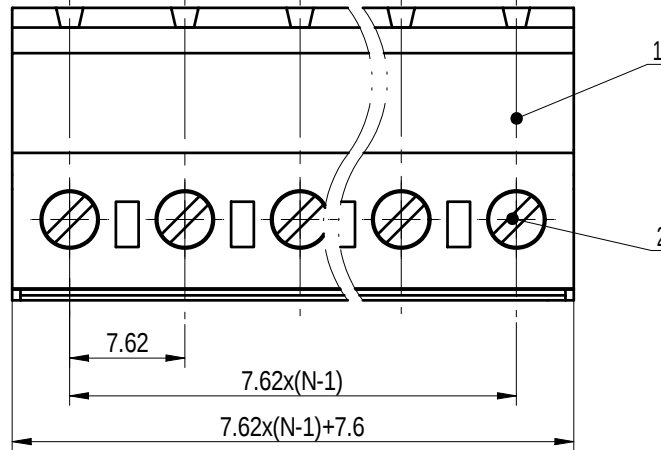

Note:

The A&Z (H) in the name means: A(H) and Z(H).

5	Pin	Copper	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Cover	PA66	UL94V-0
2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	400/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.6/5.32		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28~12/ 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~16P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



APPD: 兰春华 2022.10.12
CHKD: 龚耀志 2022.10.12

DRFT: 刘强 2022.10.12

MATERIAL:	SURFACE/COLOR:		
MAT NO./REV:	/ 01		
NAME	2EDGKR-7.62-XXP-1Y-00A&Z(H)		
DRAWING NO.	200030383	TYPE	CUSTOMER DRAWING
DRAWING STATUS	已发布	SCALE	2:1
SHEET	1/1		

00			刘强	2022.10.12
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6