

DT22A - PL / Y AC/DC ZV S (product standard):

(Series No.)

(Product Type): PL: Pilot Lamp

(Voltage grade):
AC/DC: 6/12/24/36/48/
110/220V
AC: 110/220/380V

(Color): RD: (Red)
GN: (Green)
YE: (Yellow)
WH: (White)
BU: (Blue)






13.6 ± 0.20

 $\varnothing 21.8 \pm 0.20$

38.5 ± 0.5

Print content with the
name of the product

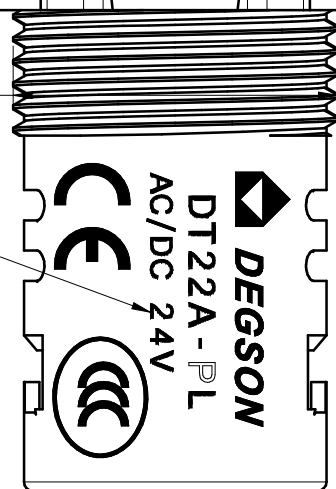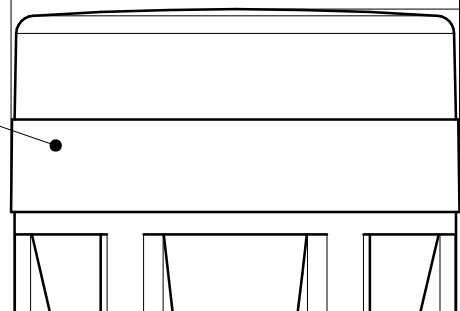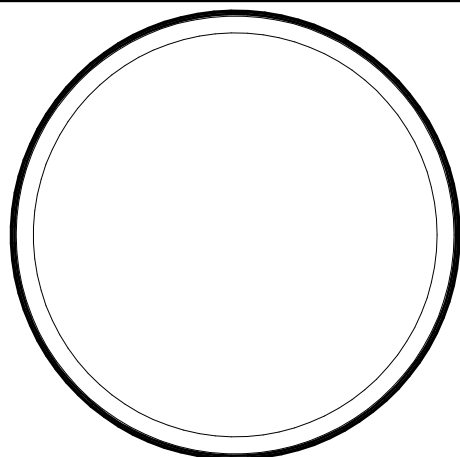

1	Pilot Lamp	/	/
ITEM	NAME OF PART	MATERIAL	NOTES

连续工作寿命/Continuous working life(H)	≥4W
允许瞬间电压波动/transient voltage fluctuations are allowed	±20%(110V以上)
工频耐压/Power frequency withstand voltage	2.5KV(交流有效值), 1min
使用频率(AC)/operating frequency(AC)	50-60Hz
额定工作电流/rated operational current(mA)	≤20
光亮度/brightness	≥100cd/m ²
相比漏电起痕指数CTI/comparative tracking index	≥100, 阻燃
绝缘电阻/insulation resistance	U _i ≤60V为5mΩ 60<U _i ≤660V为50mΩ
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

			MATERIAL:		SURFACE/COLOR:			
APPD: 李根芳 2022.10.12			MAT NO./REV: / 00		MAT STATUS: 小批量			
CHKD: 马恩开 2022.10.12			NAME DT22A-PL/YAC/DCZVS					
DRFT: 马恩开 2022.10.12								
 A4		DRAWING NO. 200112723		TYPE CUSTOMER DRAWING		DRAWING STATUS work	SCALE 2:1	SHEET 1/1
								

00		New Drawing	马恩开	2022.10.12
REV	ECN	DESCRIPTION	DRFT	DATE