SPECIFICATIONS
Current Rating: 1.5A
Voltage Rating: 125V
Contact Resistance: 40m Ω Max
Insulation Resistance: 500M Ω Min
Withstanding Voltage: 1000V AC for 1 minute
Temperature Range: -40°C to +85°C
MATERIAL
Contact: Phosphor Bronze, 0.46mm, Gold plated on contact area. Tin plated on solder area.
Insulator: PBT, UL94V-0

ORDER INFORMATION

Z 628	N	X	-	88
Series No.	N:W/O Ear E:With Ear	G0:Gold Flash G1:Gold 3u" G2:Gold 6u" G3:Gold 10u" G4:Gold 15u" G5:Gold 30u"		8P8C

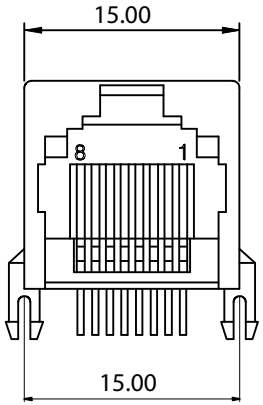

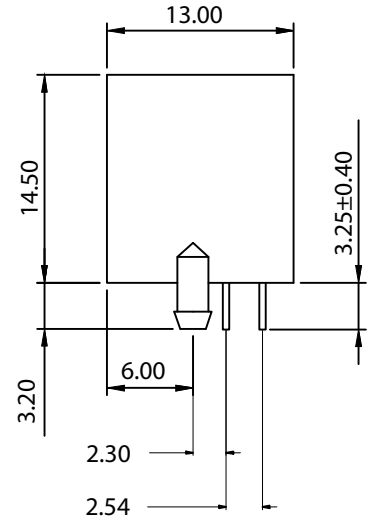

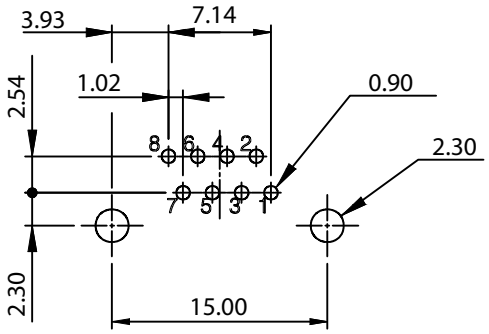

PCB LAYOUT/ TOP VIEW



MCT		PART NO.	Z628NX-88		DRAWN	Andrew				
		DRAWING NO.	Z628NX-88		CHECKED	Claudia				
		DATE	2026/04/02		APPROVED	Brian				
TITLE: Jack Side Entry H=14.5 W=13.0	REV. A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE