



MOUNTING LAYOUT

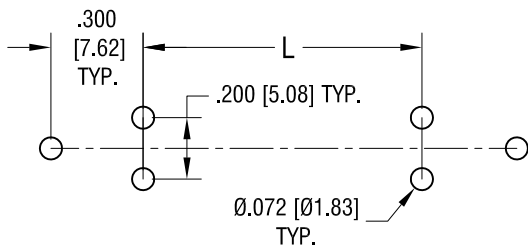




CELL SIZE	"L" DIMENSION
18650 *	1.890 [48.00]
CR123A	.570 [14.50]
17500	1.218 [30.90]
18350	.626 [15.90]

* FOR BATTERIES WITH
BUILT-IN CIRCUIT PROTECTION
(67mm LONG)

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.



ACTUAL SIZE

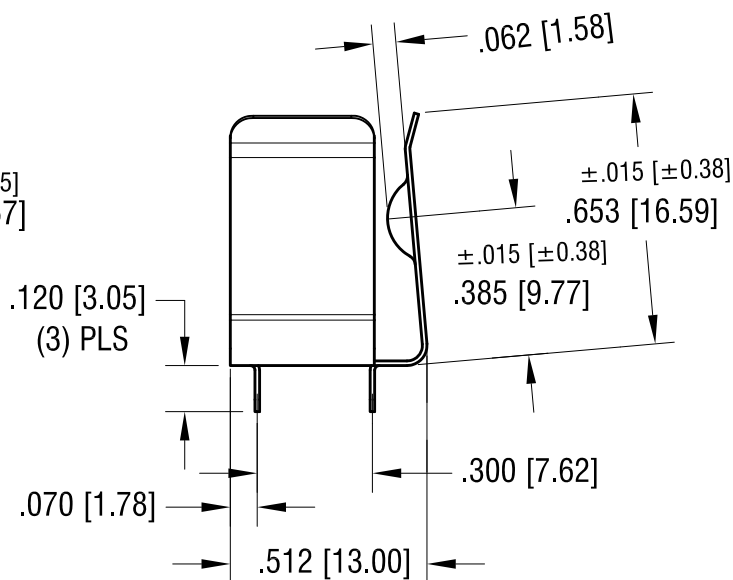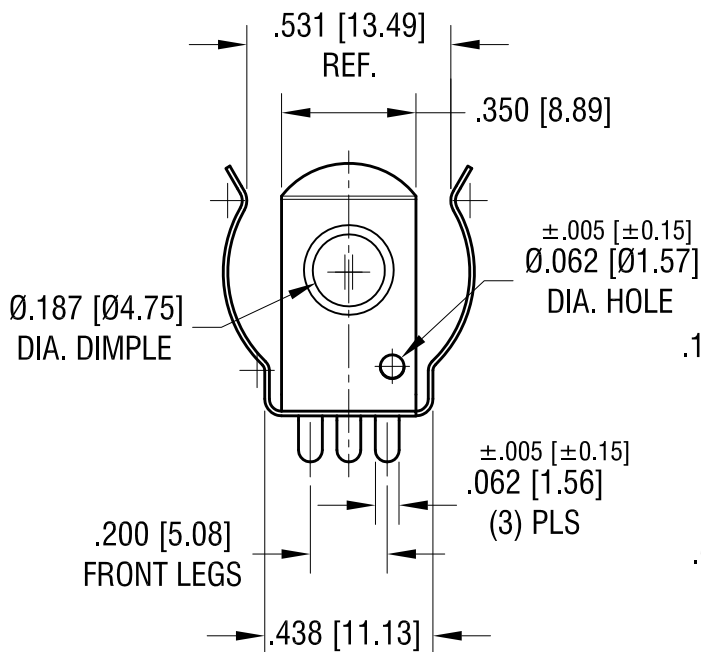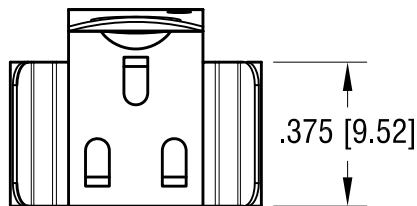

NOTE:

1. HEAT TREAT TO SPRING TEMPER

PCB PROTECTION CIRCUITS ARE REQUIRED
WHEN USED WITH LITHIUM-ION BATTERIES

9.06.16	CHANGE AS PER ECR 16-058	E
9.13.13	CHANGE AS PER ECN 13-069	D
2.08.11	CHANGE AS PER ECN 11-011	C
11.9.10	CHANGE AS PER ECN 10-079	B
8.16.10	CHANGE AS PER ECN 10-060	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME			16mm - 19mm PC BATTERY CLIP		
MATERIAL			.012 [0.30] TH'K ANNEALED SPRING STEEL		
FINISH			TIN NICKEL PLATE		
TOLERANCES			INCH	[MM]	
DECIMAL			±.010	[±0.25]	
ANGULAR			± 2°		
UNLESS OTHERWISE SPECIFIED					
CODE			C		
DRN BY			NT	DATE	
APP'D			RH	SCALE	
DWG NO.				2X	
				54	