




Reducer, hexagonal – M to M thread – Brass

Brass, nickel-plated
Metric male and female threads according to EN 60423
Variant with o-ring made of HNBR: type of protection IP 68 up to 10 bar, temperature range: –40 °C up to +150 °C
Variant without o-ring: type of protection IP 54, temperature: max. +200 °C

RoHS

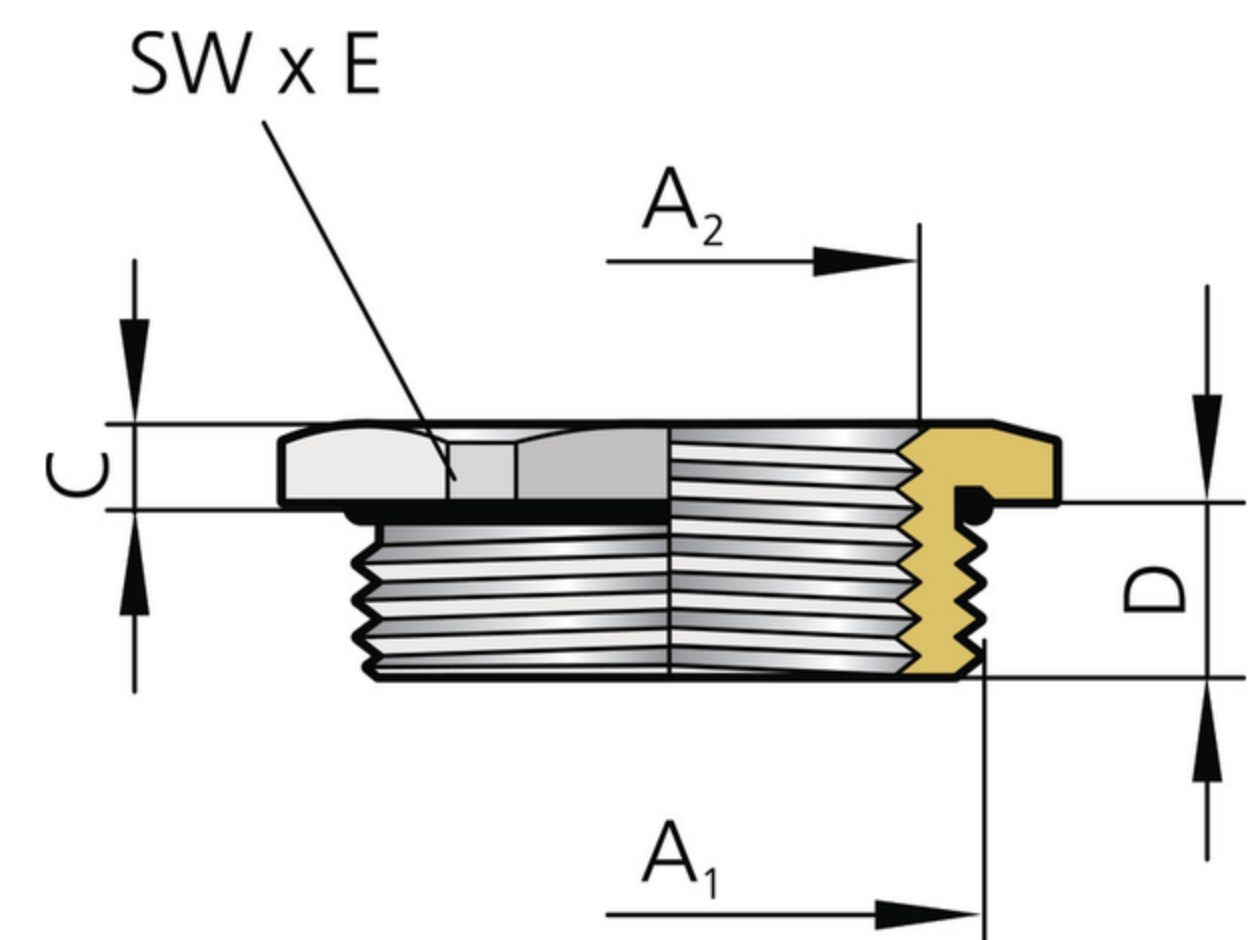

30800 | TT04600

Art. No.	Amount	Connection thread/length		Female thread	Mounting height	Spanner width		Conformity
			D mm		C mm	SW x E mm		
8.216/212	1	M16x1.5	6.0	M12x1.5	2.5	18x20.2	50	RoHS
80.216/212	1	M16x1.5	6.0	M12x1.5	2.5	18x20.2	50	RoHS
8.220/212	1	M20x1.5	6.5	M12x1.5	2.5	22x24.4	50	RoHS
80.220/212	1	M20x1.5	6.5	M12x1.5	2.5	22x24.4	50	RoHS
8.220/216	1	M20x1.5	6.5	M16x1.5	2.5	22x24.4	50	RoHS
80.220/216	1	M20x1.5	6.5	M16x1.5	2.5	22x24.4	50	RoHS
8.225/216	1	M25x1.5	7.0	M16x1.5	3.0	28x31.2	50	RoHS
80.225/216	1	M25x1.5	7.0	M16x1.5	3.0	28x31.2	50	RoHS
8.225/220	1	M25x1.5	7.0	M20x1.5	3.0	28x31.2	50	RoHS
80.225/220	1	M25x1.5	7.0	M20x1.5	3.0	28x31.2	50	RoHS

80.232/220	1	M32x1.5	8.0	M20x1.5	3.5	35x38.5	25	RoHS
8.232/225	1	M32x1.5	8.0	M25x1.5	3.5	35x38.5	25	RoHS
80.232/225	1	M32x1.5	8.0	M25x1.5	3.5	35x38.5	25	RoHS
8.240/225	1	M40x1.5	9.0	M25x1.5	4.5	43x47.5	25	RoHS
80.240/225	1	M40x1.5	9.0	M25x1.5	4.5	43x47.5	25	RoHS
8.240/232	1	M40x1.5	9.0	M32x1.5	4.5	43x47.5	25	RoHS
80.240/232	1	M40x1.5	9.0	M32x1.5	4.5	43x47.5	25	RoHS
8.250/232	1	M50x1.5	10.0	M32x1.5	4.0	54x58	10	RoHS
80.250/232	1	M50x1.5	10.0	M32x1.5	4.0	54x58	10	RoHS
8.250/240	1	M50x1.5	10.0	M40x1.5	4.0	54x58	10	RoHS
80.250/240	1	M50x1.5	10.0	M40x1.5	4.0	54x58	10	RoHS
8.263/240	1	M63x1.5	10.0	M40x1.5	4.0	68x74	10	RoHS
80.263/240	1	M63x1.5	10.0	M40x1.5	4.0	68x74	10	RoHS
8.263/250	1	M63x1.5	10.0	M50x1.5	4.0	68x74	10	RoHS