

$A = 2.50 \times \text{No. of Spaces}$
 $B = A + 5.0$
 $C = A + 3.5$

* Available in 2 through 20 circuits

Note:


- Material:
 - * Insulator: High temperature plastic UL 94V-0 Color Nature(Halogen-Free)
 - * Contact: Brass

2. For Lead Free Wave flow Process
 ⚠

Ordering Code:

$\frac{CI22}{①}$ $\frac{**}{②}$ $\frac{P}{③}$ $\frac{1}{④}$ $\frac{H}{⑤}$ $\frac{K0}{⑥}$ $\frac{-NH}{⑦}$

- Series No.
- No. of Circuits
- Contact type: P= Pin header
- Plating option:
 - 1 = 3.05μm(120μ") Min. Matte Tin over 0.76μm(30μ") Nickel
- Type: H= Right angle
- Other Option: K0= With Pin Kinked
- NH= For Lead Free Wave flow Process and Halogen-Free

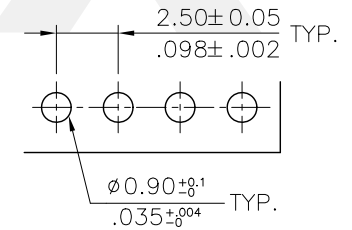

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS compliant

4						DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE PIN HEADERS	 瀚荃股份有限公司 CviLux Corporation	
3			DRAWN BY: Enya		3/12-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2			ENGINEER: Eisley		3/14-13'	.X ± 0.30/.012	.X' ± r'	MATERIAL:		
1	Enya	3/11-13'	ECN13056-0/ECR13007-1		CHECKED BY: Eisley	3/14-13'	.XX ± 0.20/.008	.X' ±		FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	3/14-13'	.XXX ± 0.10/.004	.XX' ±		DRAWING NO. CI2255SB	PART NO. CI22**P1HK0-NH
									SCALE 4 / 1	SHEET 1 OF 1