


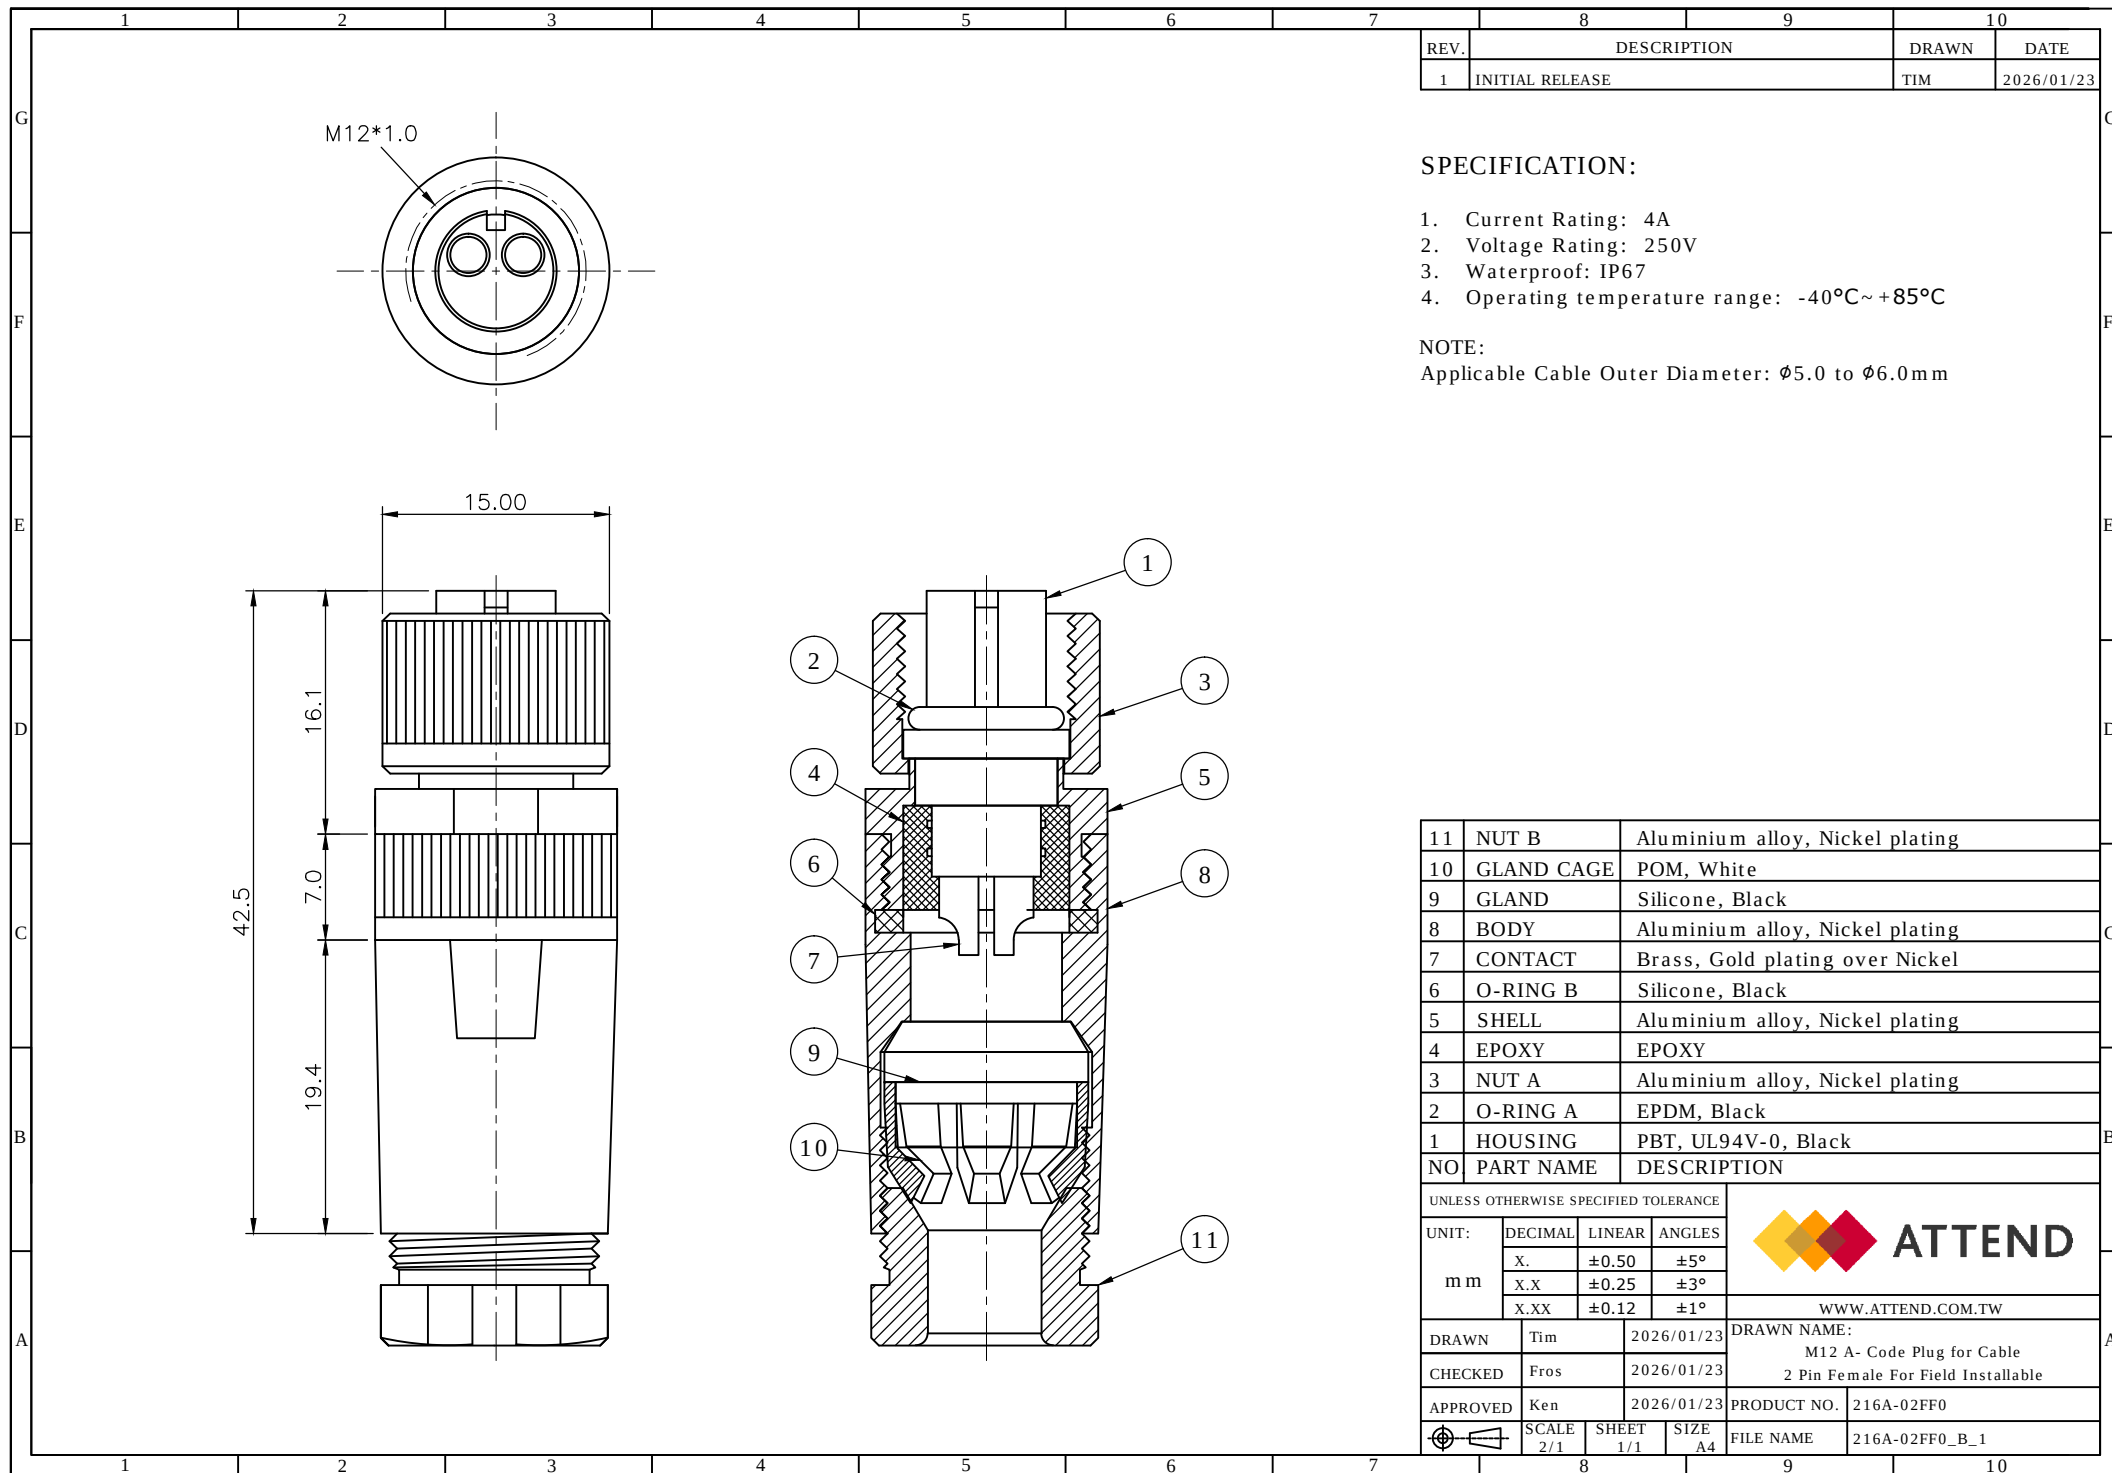

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2026/01/23

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IP67
4. Operating temperature range: -40°C~+85°C

NOTE:
Applicable Cable Outer Diameter: $\phi 5.0$ to $\phi 6.0$ mm

11	NUT B	Aluminium alloy, Nickel plating	
10	GLAND CAGE	POM, White	
9	GLAND	Silicone, Black	
8	BODY	Aluminium alloy, Nickel plating	
7	CONTACT	Brass, Gold plating over Nickel	
6	O-RING B	Silicone, Black	
5	SHELL	Aluminium alloy, Nickel plating	
4	EPOXY	EPOXY	
3	NUT A	Aluminium alloy, Nickel plating	
2	O-RING A	EPDM, Black	
1	HOUSING	PBT, UL94V-0, Black	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: m m	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			WWW.ATTEND.COM.TW
DRAWN	Tim	2026/01/23	DRAWN NAME: M12 A- Code Plug for Cable 2 Pin Female For Field Installable
CHECKED	Fros	2026/01/23	
APPROVED	Ken	2026/01/23	PRODUCT NO. 216A-02FF0
	SCALE 2/1	SHEET 1/1	SIZE A4
		FILE NAME	216A-02FF0_B_1



WWW.ATTEND.COM.TW