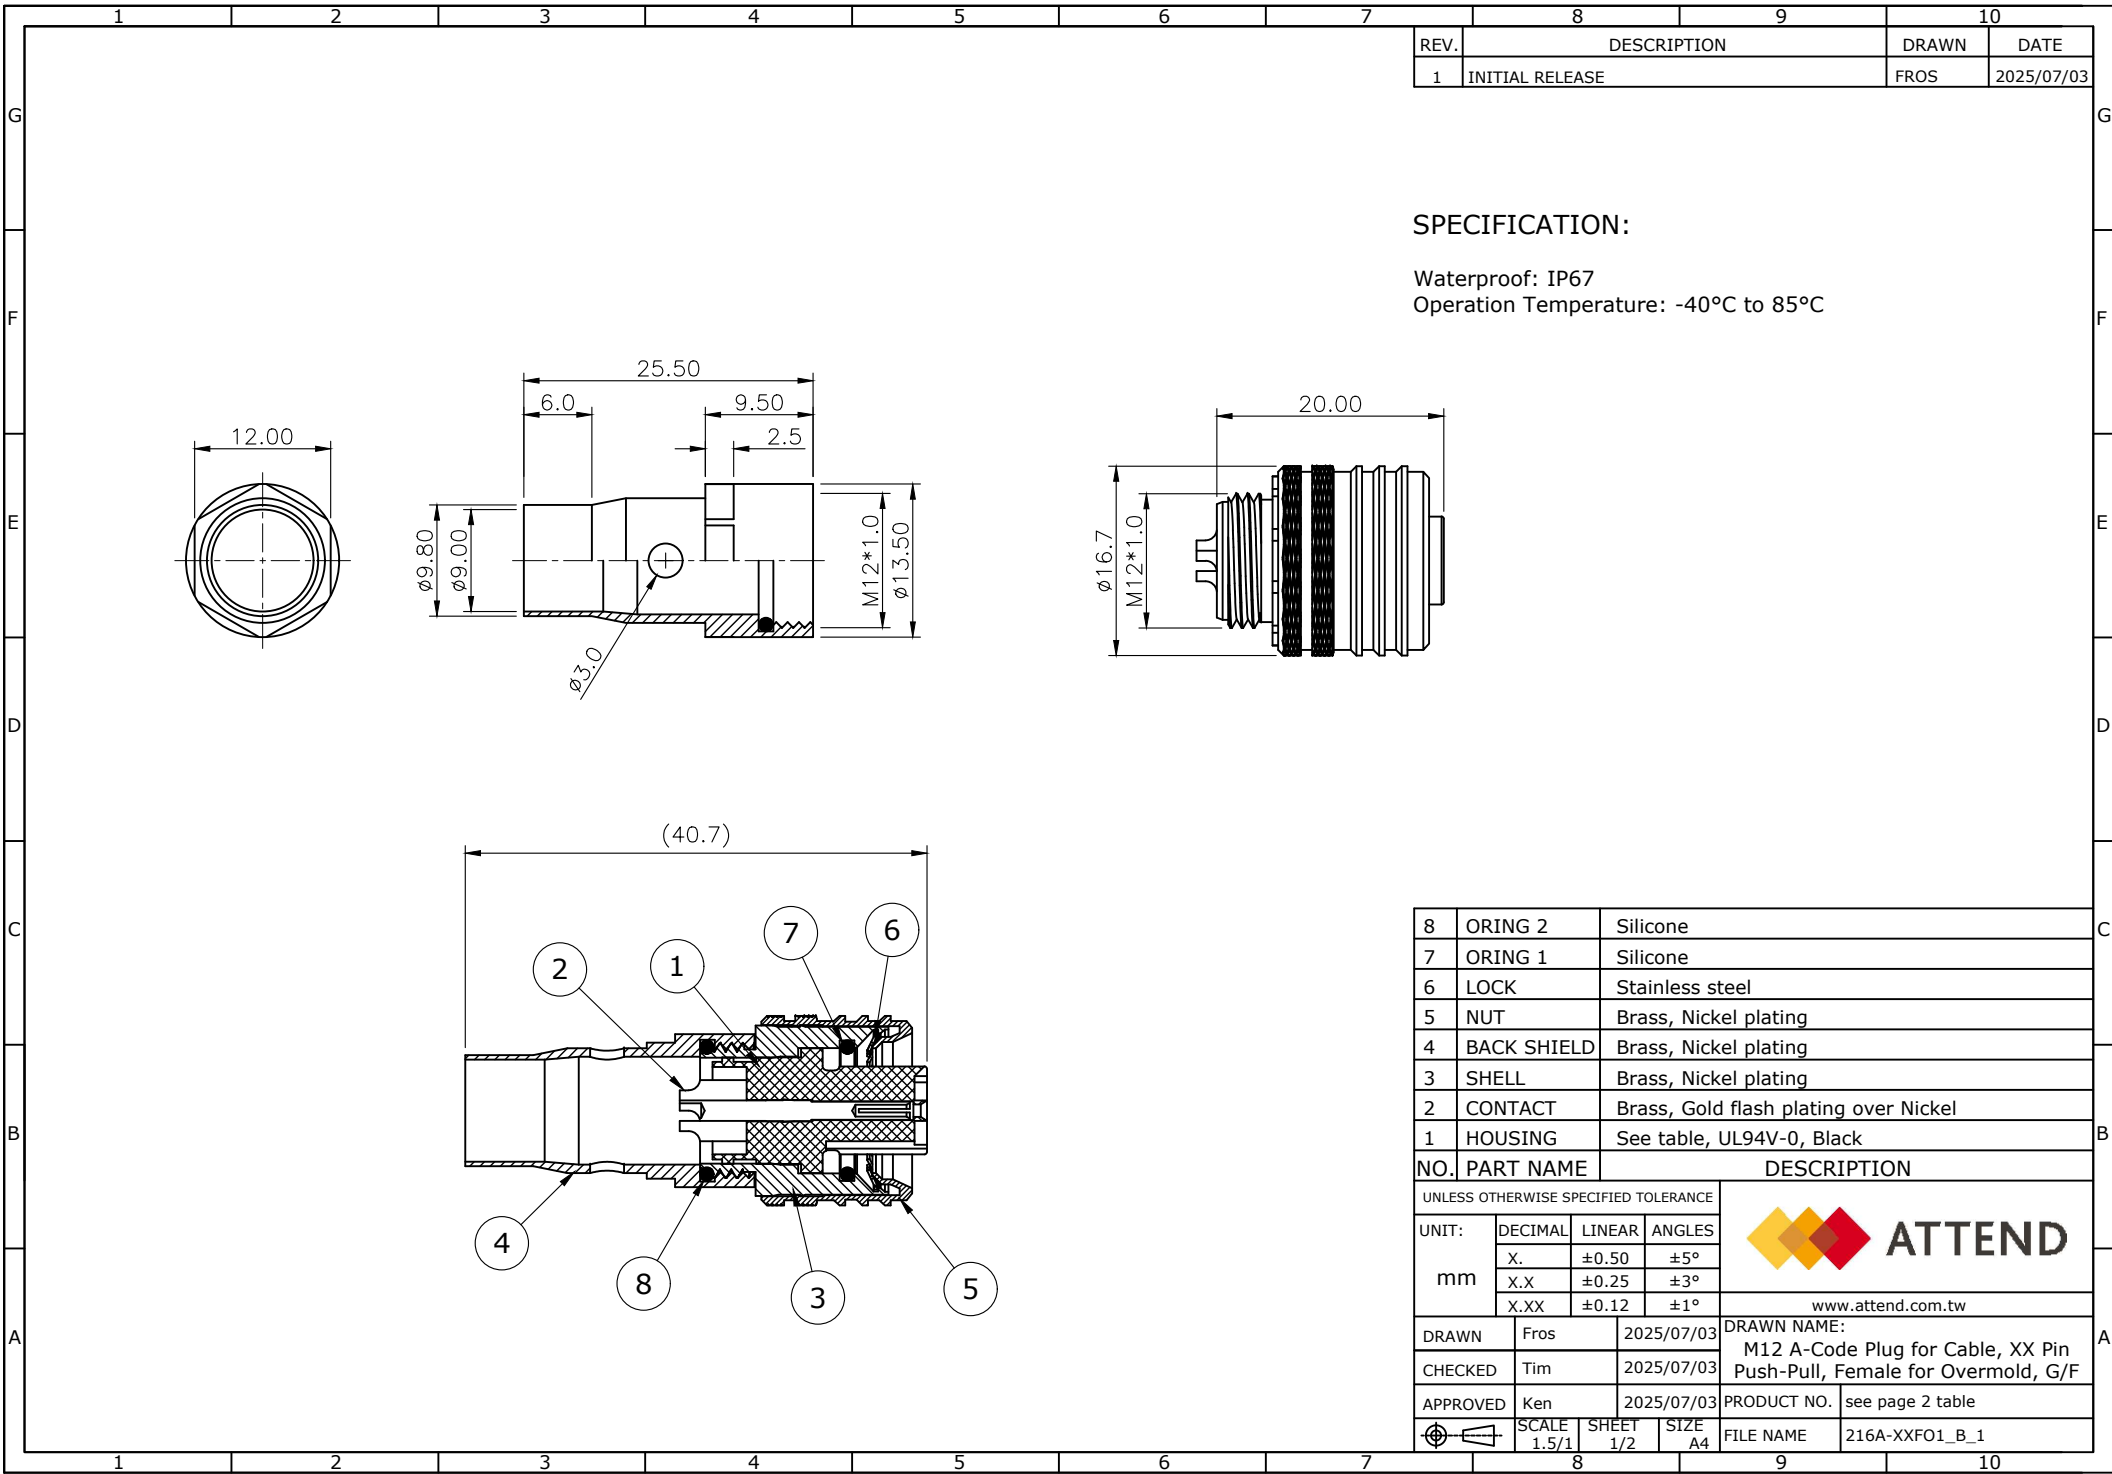







REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/07/03

SPECIFICATION:

Waterproof: IP67
Operation Temperature: -40°C to 85°C

8	ORING 2	Silicone	
7	ORING 1	Silicone	
6	LOCK	Stainless steel	
5	NUT	Brass, Nickel plating	
4	BACK SHIELD	Brass, Nickel plating	
3	SHELL	Brass, Nickel plating	
2	CONTACT	Brass, Gold flash plating over Nickel	
1	HOUSING	See table, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm		 ATTEND	
		www.attend.com.tw	
DRAWN	Fros	2025/07/03	DRAWN NAME:
CHECKED	Tim	2025/07/03	M12 A-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F
APPROVED	Ken	2025/07/03	PRODUCT NO. see page 2 table
	SCALE 1.5/1	SHEET 1/2	SIZE A4
FILE NAME		216A-XXF01_B_1	

							REV.	DESCRIPTION		DRAWN	DATE																																																													
TABLE																																																																								
																																																																								
<u>216A-04FO1</u>			<u>216A-05FO1</u>																																																																					
250V/4A PBT UL94-V0			60V/4A PBT UL94-V0																																																																					
																																																																								
<u>216A-08FO1</u>																																																																								
30V/2A PBT UL94-V0																																																																								
																																																																								
<u>216A-12FO1</u>																																																																								
30V/1.5A Nylon 66 UL94V-0																																																																								
							<table><tr><td colspan="5">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="2" rowspan="4"> ATTEND</td></tr><tr><td>UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="2">ANGLES</td></tr><tr><td rowspan="2">mm</td><td>X.</td><td>±0.50</td><td colspan="2">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="2">±3°</td></tr><tr><td></td><td>X.XX</td><td>±0.12</td><td colspan="2">±1°</td></tr><tr><td>DRAWN</td><td colspan="2">Fros</td><td colspan="2">2025/07/03</td><td colspan="2">DRAWN NAME:</td></tr><tr><td>CHECKED</td><td colspan="2">Tim</td><td colspan="2">2025/07/03</td><td colspan="2">M12 A-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F</td></tr><tr><td>APPROVED</td><td colspan="2">Ken</td><td colspan="2">2025/07/03</td><td>PRODUCT NO.</td><td>see table</td></tr><tr><td colspan="3"></td><td>SCALE</td><td>SHEET</td><td>SIZE</td><td>FILE NAME</td></tr><tr><td colspan="3"></td><td>1.5/1</td><td>2/2</td><td>A4</td><td>216A-XXFO1_B_1</td></tr></table>					UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND		UNIT:	DECIMAL	LINEAR	ANGLES		mm	X.	±0.50	±5°		X.X	±0.25	±3°			X.XX	±0.12	±1°		DRAWN	Fros		2025/07/03		DRAWN NAME:		CHECKED	Tim		2025/07/03		M12 A-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F		APPROVED	Ken		2025/07/03		PRODUCT NO.	see table				SCALE	SHEET	SIZE	FILE NAME				1.5/1	2/2	A4	216A-XXFO1_B_1
UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND																																																																			
UNIT:	DECIMAL	LINEAR	ANGLES																																																																					
mm	X.	±0.50	±5°																																																																					
	X.X	±0.25	±3°																																																																					
	X.XX	±0.12	±1°																																																																					
DRAWN	Fros		2025/07/03		DRAWN NAME:																																																																			
CHECKED	Tim		2025/07/03		M12 A-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F																																																																			
APPROVED	Ken		2025/07/03		PRODUCT NO.	see table																																																																		
			SCALE	SHEET	SIZE	FILE NAME																																																																		
			1.5/1	2/2	A4	216A-XXFO1_B_1																																																																		

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Fros	2025/07/03		DRAWN NAME: M12 A-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F	
CHECKED	Tim	2025/07/03			
APPROVED	Ken	2025/07/03			
				PRODUCT NO.	see table
	SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216A-XXFO1_B_1