

Specifications

Current Rating: 2A AC,DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Temperature Range: -40°C ~ +105°C

Material

Insulator: Nylon 6T, UL94V-0
Contact: Copper Alloy

ORDER INFORMATION

P

M

20

15

X

2

A/B/C -

2

XX

X

X

SMT Type

Pitch 2.0mm

Height=1.5mm

G0:Gold Flash
G1:Gold 3u"
G2:Gold 5u"
G3:Gold 10u"
G4:Gold 15u"
G5:Gold 30u"

S0:Selective Flash
S1:Selective 3u"
S2:Selective 5u"
S3:Selective 10u"
S4:Selective 15u"
S5:Selective 30u"

RoHS + NY 6T


Customer Design Dimension

No. of Contacts Per Row (02~40)



Dual Row

T:Tube
P:Cap+Tube
R:Cap+Reel

Blank:W/O Peg
P:With Peg

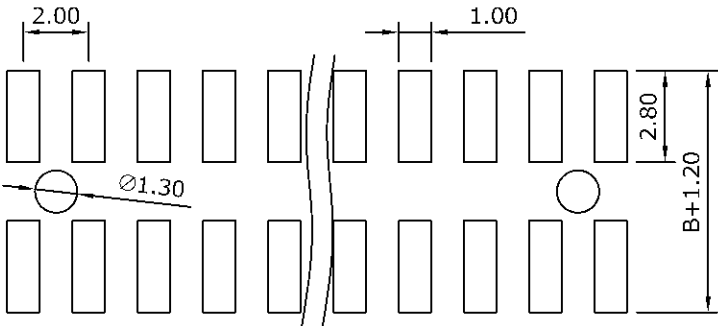

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

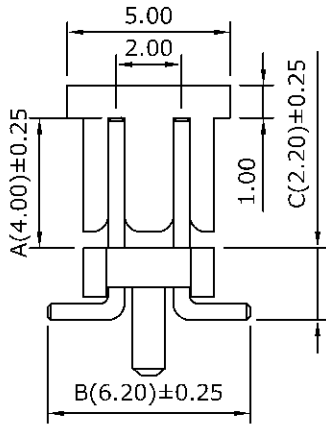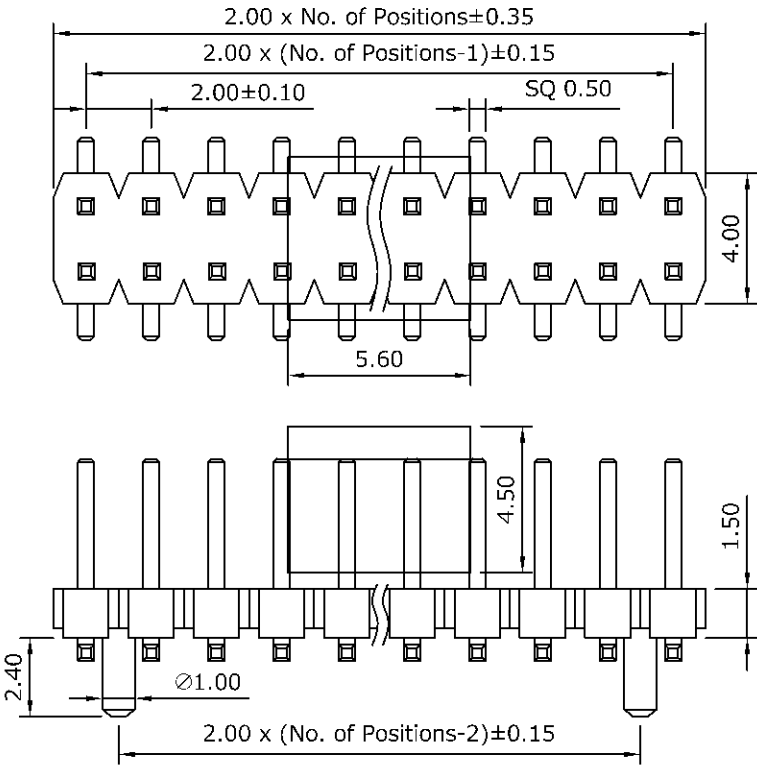

			TITLE: Pin Header 2.00mm Plastic Height 1.5mm		PART NO.		PM2015X2A/B/C-2XXXXX		DATA	2006/04/15
					DRAWING NO.		PM2015X2A/B/C-2XXXXX		DRAWN	Sayid
					CUSTOMER P/N				APPROVED	Max
REV.	DESCRIPTION	DATA		REV. A	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm