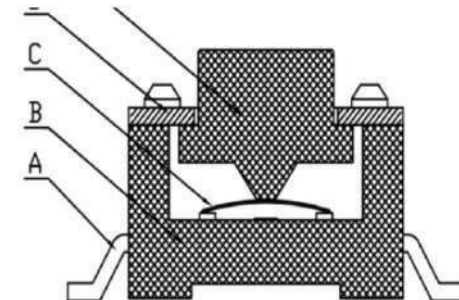
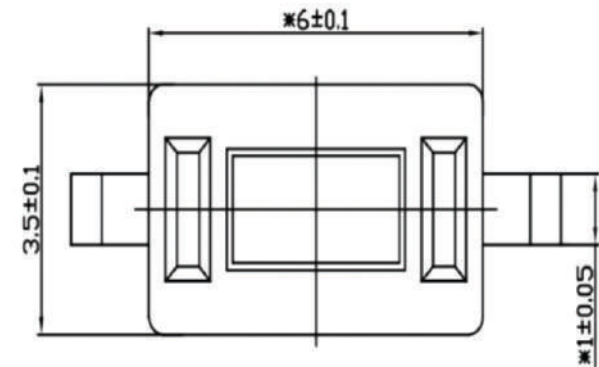
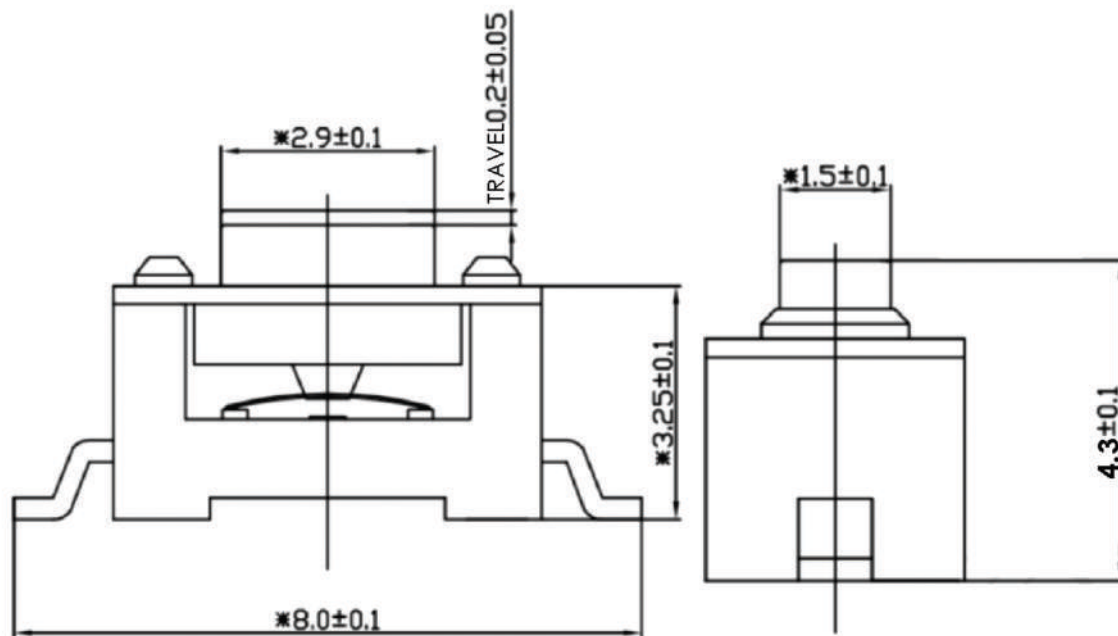


All components shall have smooth surface free of scratch, water mark, deformation and other defects affecting appearance or performance.

Rated load: DC 12V, 50mA;

Insulation Resistance: Min.100M Ω at DC100V;

Dielectric Withstand Voltage: AC250V for 1 minute;

Max. Contact Resistance:100m Ω .

The switch shall have crisp tactile feel with clear and stable detent, no stuck movement; it shall rebound quickly once external force is removed.

Code	Part Name	Material	Qty	Remark
A	Retainer Clip	Brass H62	1	Silver Plated
B	Base	White PPA/G3	1	—
C	Contact Spring	Silver-clad Stainless Steel	1	Outsourced
D	Push Button	White PPA/G3	1	—
E	Cover Plate	0.25mm Stainless Steel Strip	1	Copper-Tin Plated