


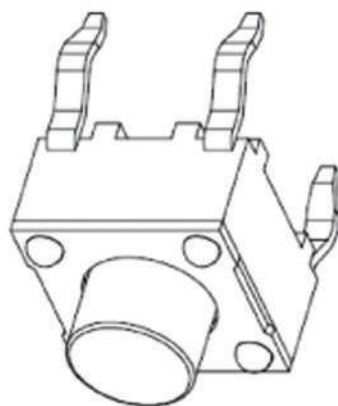
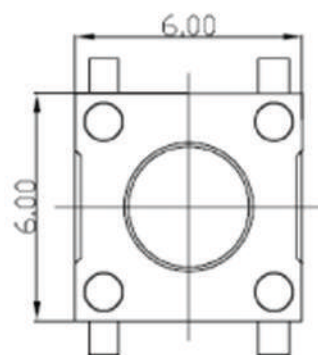



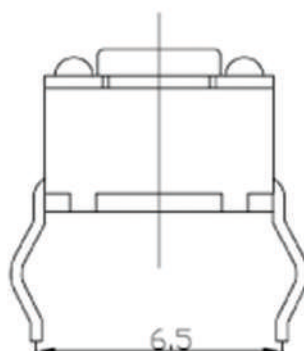

SCHEMATIC

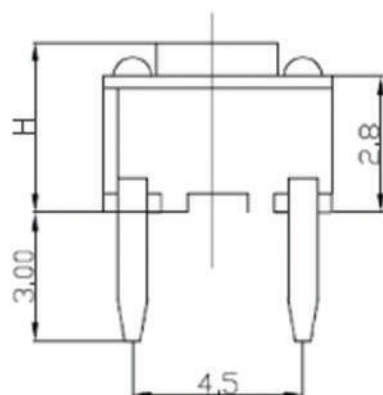

Recommended P. C. B Layout

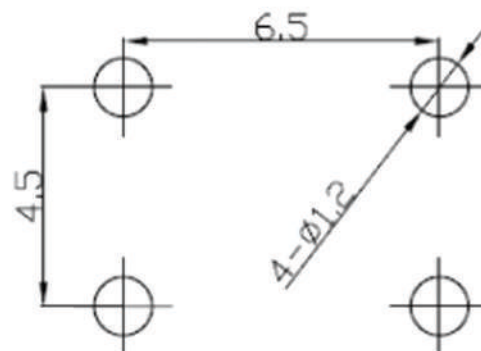

1. Electrical Characteristics

1.1 Rating: DC 12V, 0.5A

1.2 Travel: 0.25 ± 0.1 mm

1.3 Contact Resistance: Max.100 m Ω

1.4 Service Life: Min.50,000 cycles

2. Operating Temperature Range: $-16^{\circ}\text{C} \sim +60^{\circ}\text{C}$

No.	Part Name	Material
1	Base	PA66 / Brass
2	Contact Spring	Phosphor Bronze with Silver Plating
3	Cover Plate	Brass
4	Push Button	PPA