



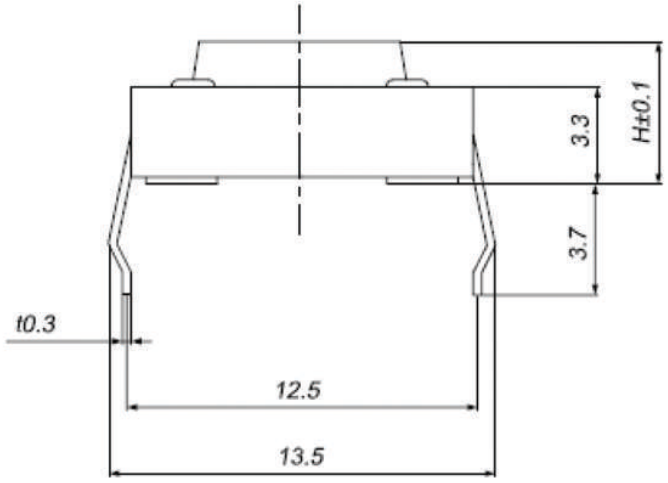


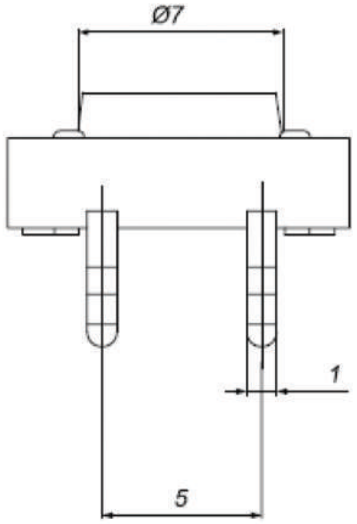


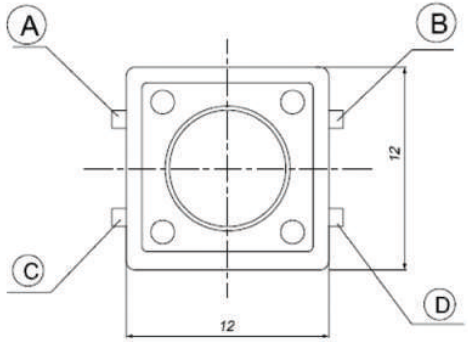

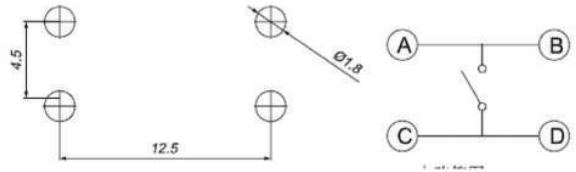

1.Rating:DC12V 50mA.
2.Travel:0.35±0.1mm.
3.Operating Force: 250±30gf
4.Contact Resistance:5OmQMax.
5.Life:100,000 Cycles Min.



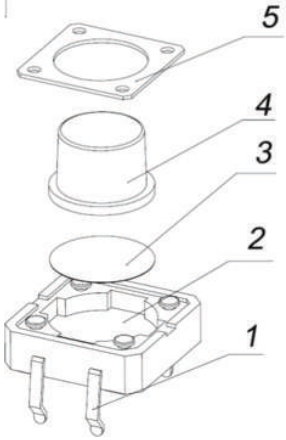

No.	Part Name	Material	Color	Surface Finish
1	Contact Terminal	Brass	—	Silver Plated
2	Base	PPA / PA66	Black	—
3	Contact Spring	Silver-clad Copper	—	—
4	Push Button	PA66	Black	—
5	Cover Plate	Iron	—	Copper-Tin Plated