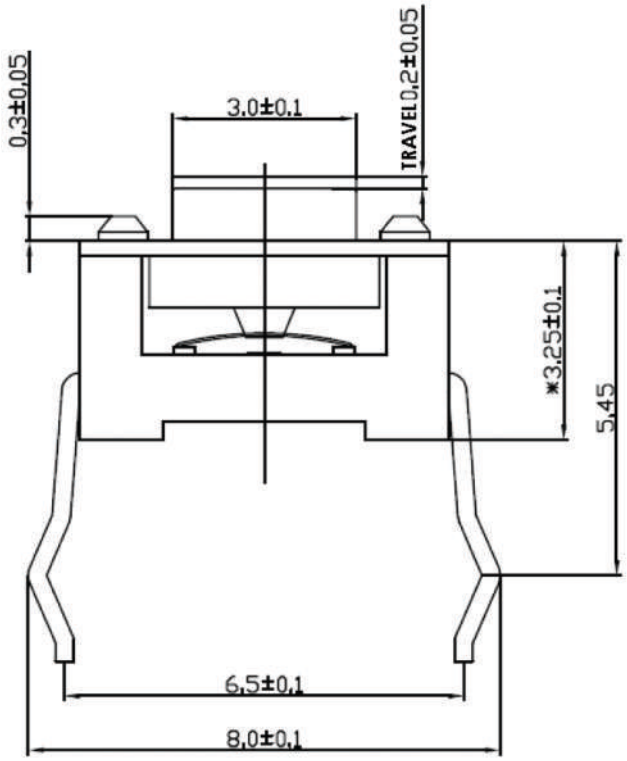

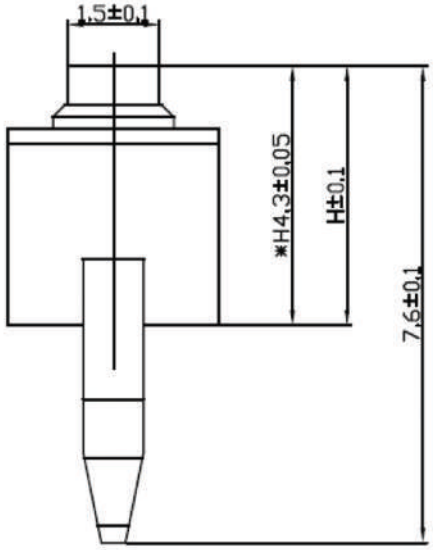

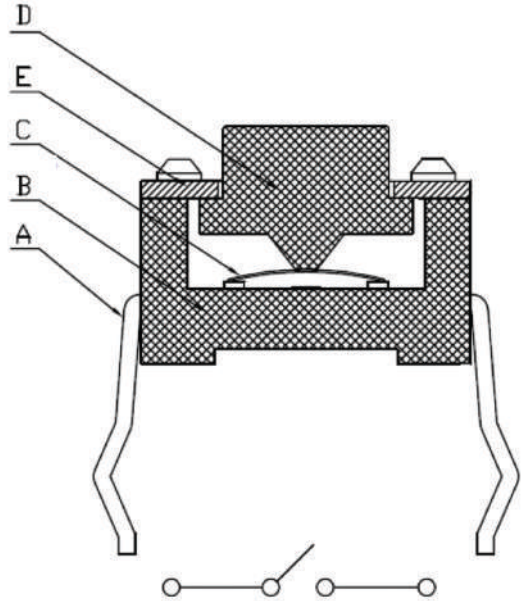

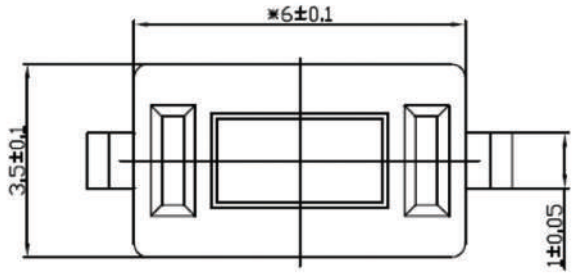

Rated Load: DC 12V, 50mA
Insulation Resistance: Min.100MΩ at DC100V
Withstand Voltage: AC250V, 50Hz, 1 minute
Electrical Life: 20,000 cycles minimum
Ambient Temperature Range: -25℃ ~ +70℃
Relative Humidity: ≤95%RH under 40℃ environment
Contact Resistance: Max.50mΩ
Travel: 0.20±0.05mm
Operating Force: 260gf ±20gf

Code	Part Name	Material	Qty	Remark(Surface Finish)
A	Retainer Clip	Brass	1	Silver Plated
B	Base	White PPA/G3	1	—
C	Contact Spring	Imported Silver-clad Stainless Steel	1	—
D	Push Button	White PPA/G3	1	—
E	Cover Plate	0.25mm Stainless Steel Strip	1	Copper-Tin Plated